

ITACA[®]
an italian live

ITACA[®]
an italian live



ITACA CERAMIC PVT. LTD.

8-A / National Highway,
Opp. 132 K.V. Lalpar Power Station
P.B. No. 306 (P.P.W.), Lalpar,
MORBI 363642, (Gujarat) INDIA.

For Export Inquiry

Kiran@itaca.in
export@itaca.in
export.europe@itaca.in
+91 90990 88201
+91 99786 88217

For Domestic Inquiry

marketing@itaca.in
+91 90990 88467
+91 74348 55594

TILES जो
MOOD
बदल दे।

GLAMOUR


600x1200mm

Glue Surface



#**TILES** जो
MOOD
बदल दे।

always
a new

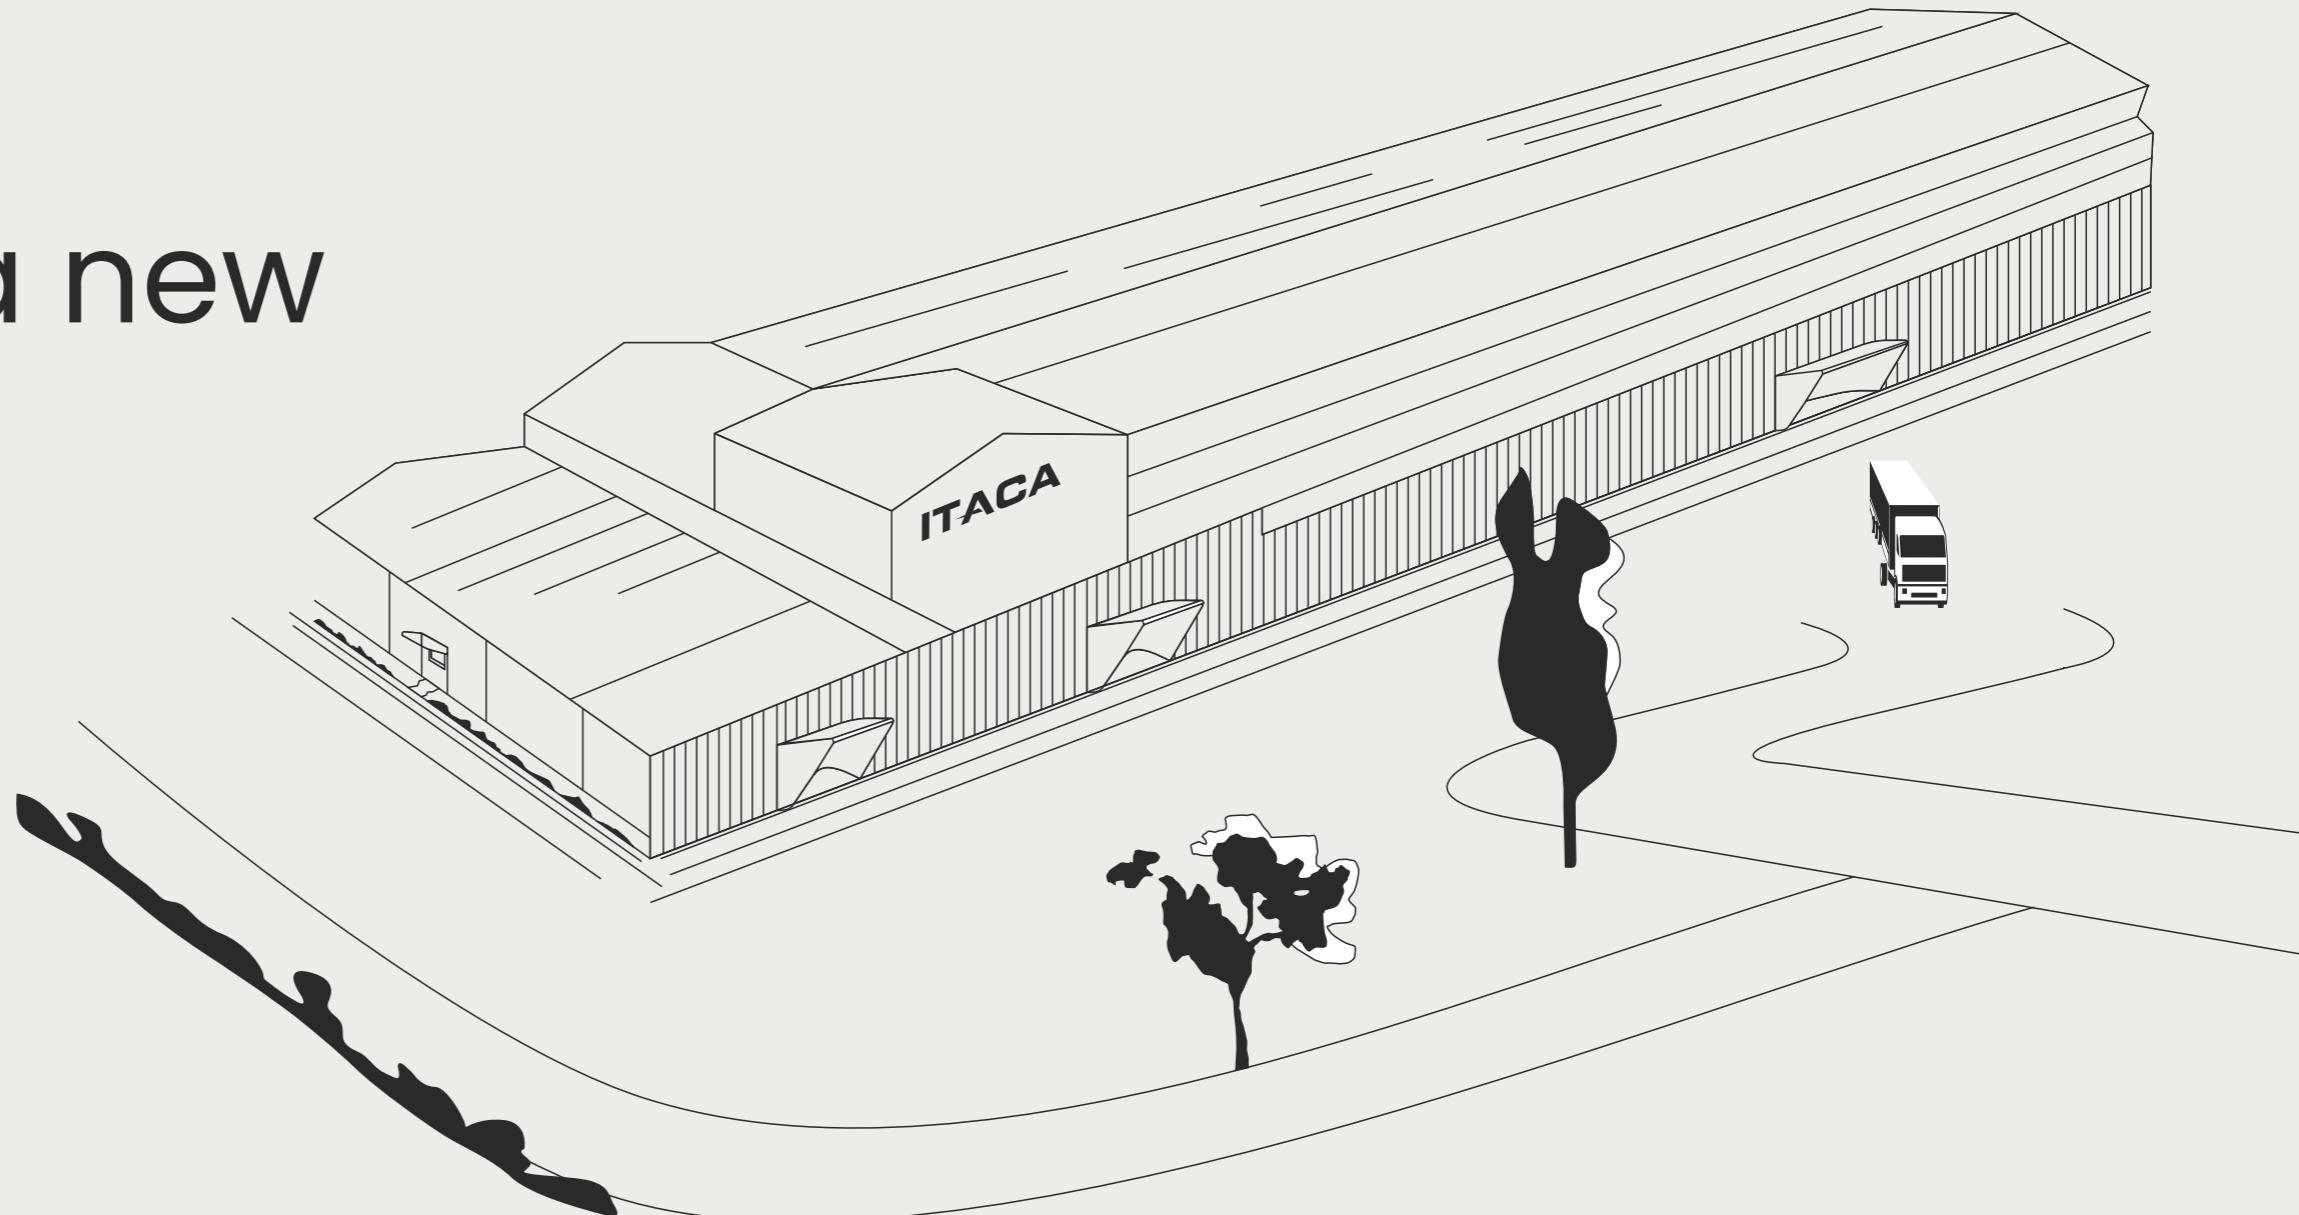

more than
75k sq. mtr.
Per Day Production Capacity



23 Year
of
Experience



more than
950+
Employees



04 manufacture
unit



89+
Countries Served



more than
925+
Worldwide Customers

stooory

We've examined the most primitive of marbles over the years and have brought back the very best of material for you. Always a new story, is based upon the philosophy of bringing both, authentic and aesthetic of ceramics and give it an exemplary form of design.

design and
innovation

will

change your

mooooood





Made in India isn't just style, design and excellence, it's a way of being. We identify with the values expressed by Itaca's ethical code, which guarantee absolute compliance with labor regulations, and with the marks Made in India and Ceramics of India, which certify the quality of authentic Italian style.

woonderous innovations

With a texture that exudes durability, this surface instils a sense of longevity in your space, capable of revealing royalness as well as a sense of sureness about the surface.

GLAMOUR

Glue Surface
600x1200mm

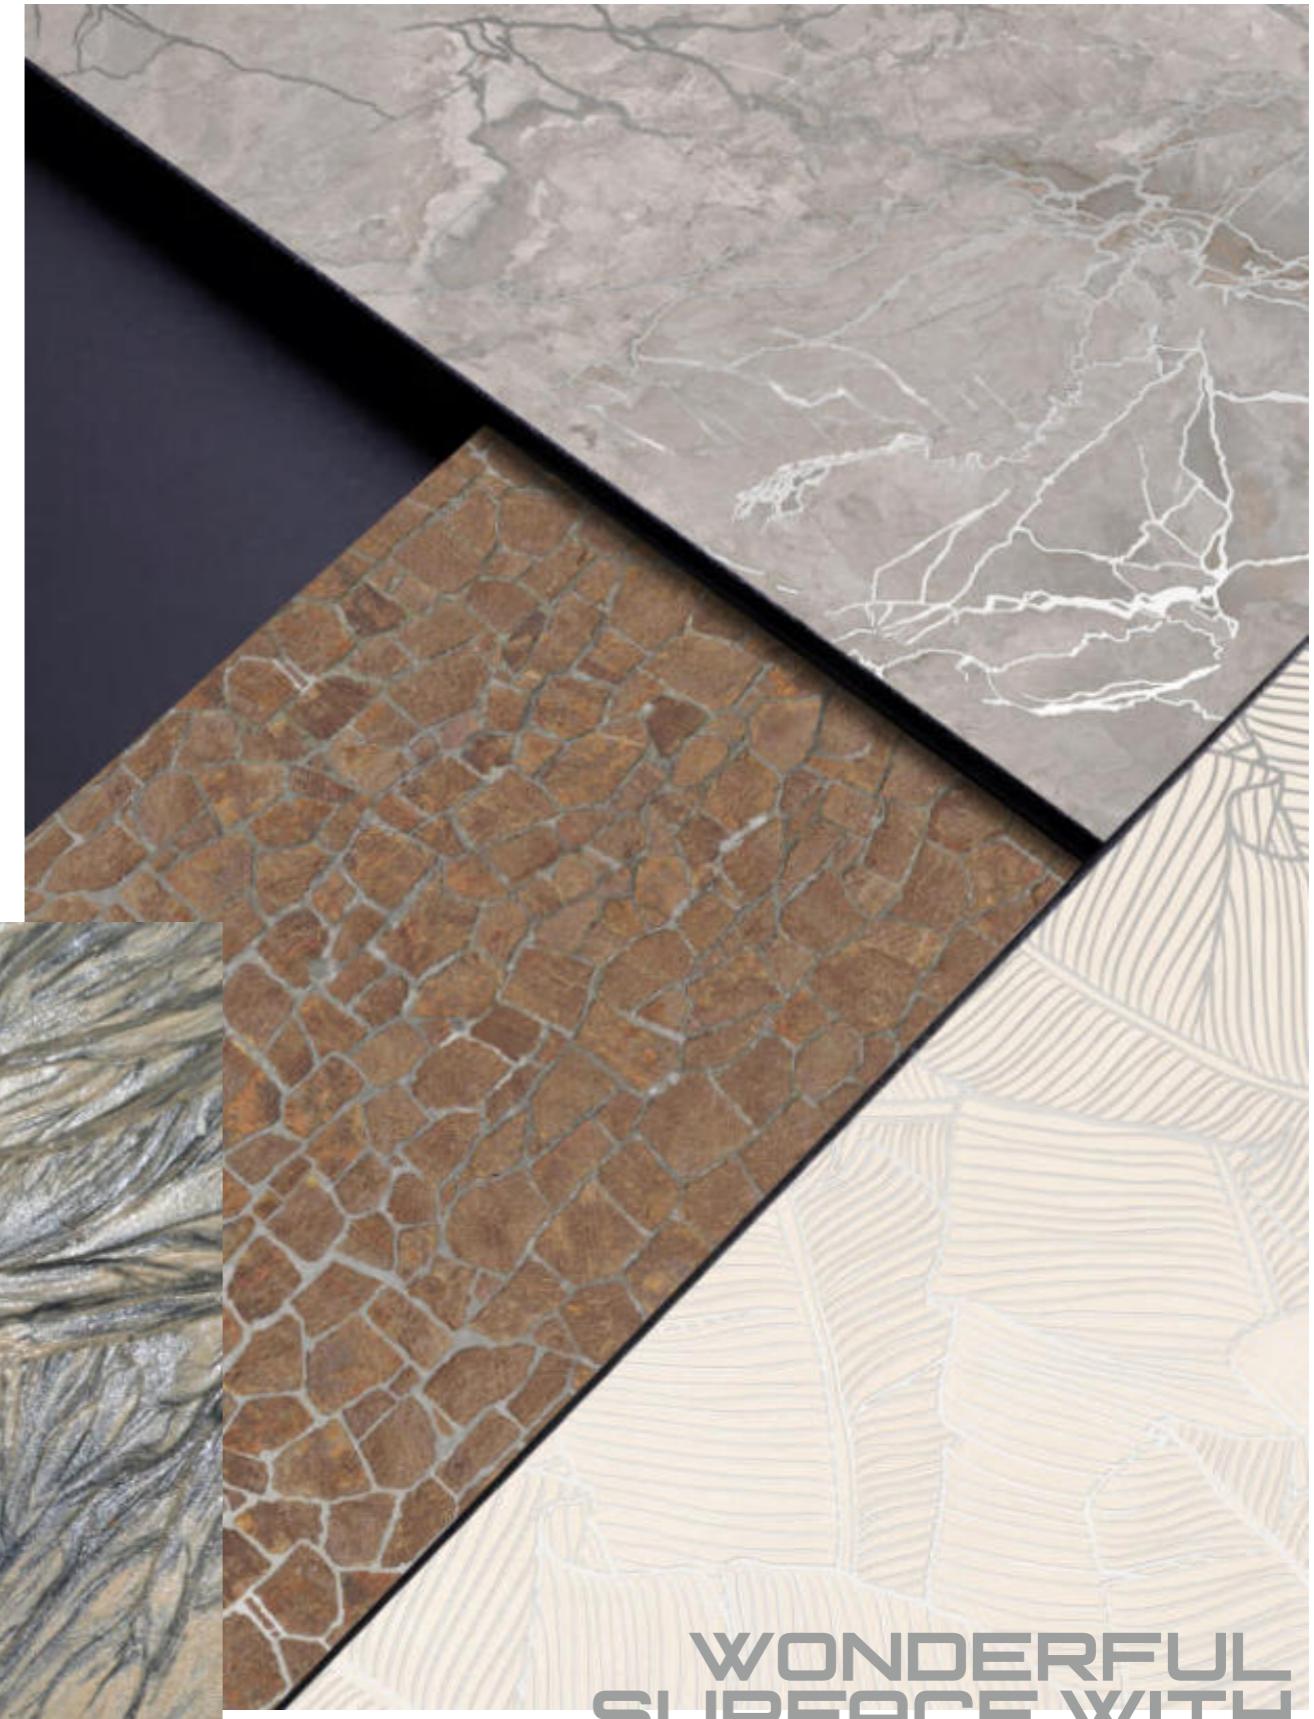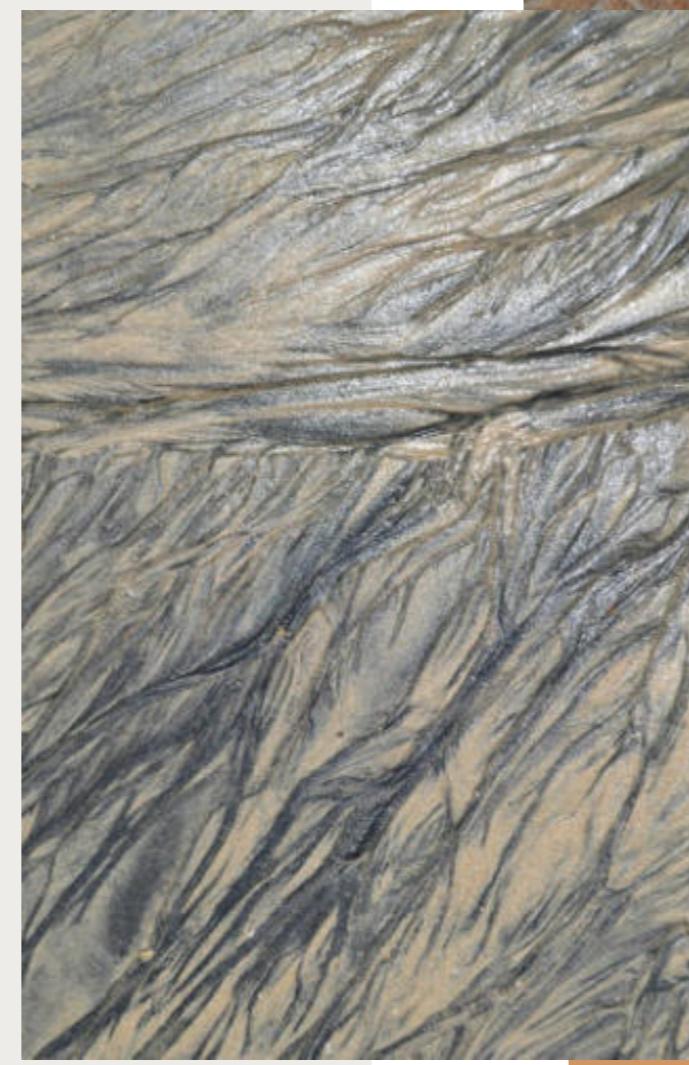

WONDERFUL
SURFACE WITH
NATURE'S TOUCH



CUBA STONE TAUPE

GLAMOUR

Glazed
Vitrified Tiles

ITACA[®]
an italien live



CUBA STONE TAUPE

Random: 02

Surface : Glue

Thickness: 9mm

Tap here
to get
360° | 3D | Faces | Live Video





CUBA STONE CHOCO

GLAMOUR

Glazed
Vitrified Tiles

ITACA[®]
an italian live



CUBA STONE CHOCO

Random: 02

Surface : Glue

Thickness: 9mm

Tap here
to get
360° | 3D | Faces | Live Video





**CORALITO
BEIGE ENDLESS**

GLAMOUR

Glazed
Vitrified Tiles

ITACA
an italian live



CORALITO BEIGE ENDLESS

Random: 04

Surface : Glue

Thickness: 9mm

Tap here
to get
360° | 3D | Faces | Live Video





CORALITO GREY ENDLESS

GLAMOUR

Glazed
Vitrified Tiles

ITACA®
an italian live



CORALITO GREY ENDLESS

Random: 04

Surface : Glue

Thickness: 9mm

Tap here
to get
360° | 3D | Faces | Live Video





**LARISA
BLANCO**

GLAMOUR

Glazed
Vitrified Tiles

ITACA
an italian live



LARISA BLANCO

Tap here
to get
360° | 3D | Faces | Live Video



Random: 06

Surface : Glue

Thickness: 9mm



BOSANIA GOLD

GLAMOUR

Glazed
Vitrified Tiles

ITACA®
an italian live



BOSANIA GOLD

Random: 05

Surface : Glue

Thickness: 9mm

Tap here
to get
360° | 3D | Faces | Live Video





SOFIA MULY DECOR

GLAMOUR

Glazed
Vitrified Tiles

ITACA®
an italian live



SOFIA MULY DECOR

Tap here
to get
360° | 3D | Faces | Live Video



Random: 01

Surface : Glue

Thickness: 9mm

technical specification

600x1200mm

| CHARACTERISTIC | STANDARD AS PER ISO-13006/EN 14411 GROUP Bla | MEAN VALUE OF POLISHED GVT | MEAN VALUE OF RUSTIC GVT | TEST METHOD |
|--|--|----------------------------|-----------------------------|--------------|
| REGULATORY PROPERTIES | | | | |
| Deviation in length & width | ±0.5 % | ±0.1 % | ±0.1 % | ISO-10545-2 |
| Deviation in thickness | ±5.0 % | ±4.0 % | ±4.0 % | ISO-10545-2 |
| Straightness in side | ±0.5 % | ±0.1 % | ±0.1 % | ISO-10545-2 |
| Rectangularity | ±0.5 % | ±0.1 % | ±0.1 % | ISO-10545-2 |
| Surface flatness | ±0.5 % | ±0.2 % | ±0.2 % | ISO-10545-2 |
| Color difference | Unaltered | No change | No change | ISO-10545-16 |
| Glossiness | As per mfg | Min 90% | Min 4% | GLOSSOMETER |
| STRUCTURAL PROPERTIES | | | | |
| Water absorption | < 0.50 % | < 0.20 % | < 0.20 % | ISO-10545-3 |
| Apparent density | > 2.0 g/cc | > 2.10 g/cc | > 2.10 g/cc | DIN 51082 |
| MASSIVE MECHANICAL PROPERTIES | | | | |
| Modulus of rupture | Min. 35 N/mm ² | Min. 40 N/mm ² | Min. 40 N/mm ² | ISO-10545-4 |
| Breaking strength | Min. 1300 N | Min. 2000 N | Min. 2000 N | ISO-10545-4 |
| Impact resistance | As per mfg. | Min. 0.55 | Min. 0.55 | ISO-10545-5 |
| SURFACE MECHANICAL PROPERTIES | | | | |
| Surface abrasion resistance | As per mfg. | Min. Class-3 | Min. Class-4 | ISO-10545-7 |
| MOH's hardness | As per mfg. | Min. 4 | Min. 5 | EN 101 |
| THERMO HYGROMETRIC PROPERTIES | | | | |
| Frost resistance | No damage | No damage | No damage | ISO-10545-12 |
| Thermal shock resistance | No damage | No damage | No damage | ISO-10545-9 |
| Moisture expansion | Nil | Nil | Nil | ISO-10545-10 |
| Thermal expansion (COE) | Max. 9.0 x 10 ⁻⁶ | Max. 6.5x10 ⁻⁶ | Max. 6.5 x 10 ⁻⁶ | ISO-10545-8 |
| Crazing resistance | As per mfg. | Min. 10 Cycle | Min. 10 Cycle | ISO-10545-11 |
| CHEMICAL PROPERTIES | | | | |
| Chemical resistance | No damage | No damage | No damage | ISO-10545-13 |
| Stain resistance | Resistant | Resistant | Resistant | ISO-10545-14 |
| SAFETY PROPERTIES | | | | |
| Slip resistance | As per mfg. | >0.40 | >0.40 | ISO-10545-17 |
| Fire resistance | As per mfg. | Fire proof | Fire proof | N. A. |
| Lead & Cadmium given off by glazed tiles | As per mfg. | Does not yield Pb & Cd | Does not yield Pb & Cd | ISO-10545-15 |

PACKING DETAILS

| SR. NO | PRODUCT | NOMINAL SIZE | THICKNESS | TILES PER BOX | COVERAGE AREA |
|--------|-----------------|--------------|-----------|---------------|---------------|
| 1 | VITRIFIED TILES | 600x1200mm | 9mm | 2 | 1.44 Sq. Mtr. |