




ICONIC MASTERPIECES

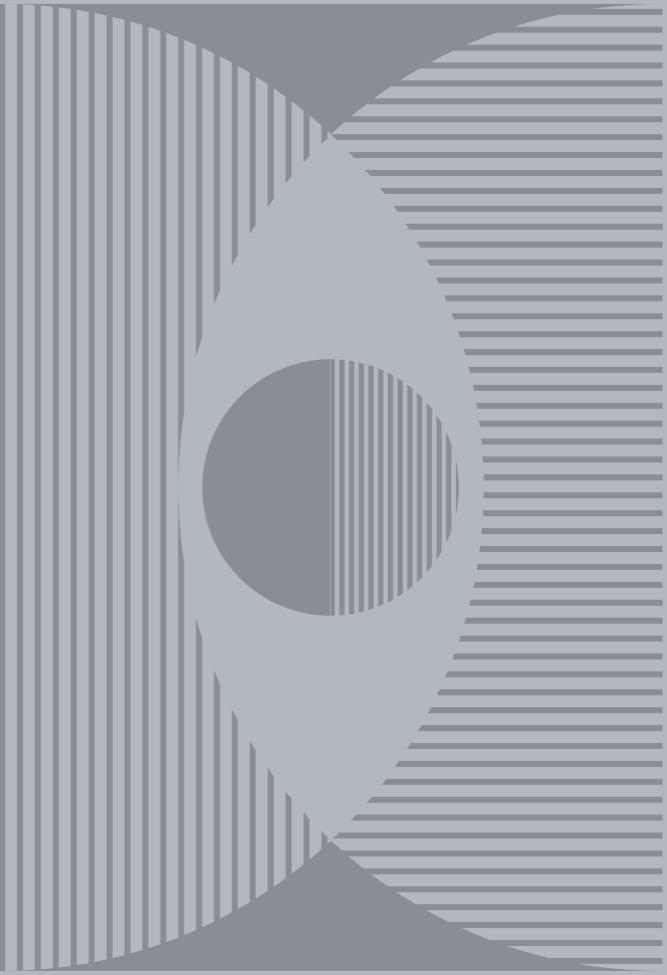

MOTTO GROUP

8-A, National Highway, Sartanpar Road, At. Sartanpar,
Ta. Wankaner, Morbi - 363 621, Gujarat, INDIA

Mail. info@mottogroup.in, Web. www.mottogroup.in

Toll-free. 1800 123 2124

Call. +91 95123 80072

Scan for Catalogue



STONE ART COLLECTION

1200x2400mm

9mm Thickness

UNFOLD THE AGE OF
NEW CREATIONS

CREATE MOMENTS WITH CLASSY TILES

Motto, is taking the pure essence of nature, molded into an infinity of shapes and colors merely by the presence of Earth, Water, Air, and Fire. These creations are a part of our planet and each fragment has a soul of its own. Motto has drawn inspiration from them to create an extensive range of slabs with a finish that is marvelous and exquisite. the process of thinking, feeling, and living big all wrapped up into the Beginning of something Big.

1200x2400mm

9mm Thickness

STONE ART
COLLECTION

FULL BODY
SERIES

Italian Technology



FLEXIBLE BODY

INTRODUCING A
TIMELESS RANGE

DIGI MATT 5.0
SURFACE


THE FUSION OF DURABILITY AND MODERN ELEGANCE

Unravel a collection that is a testament to contemporary elegance and an ode to fine craftsmanship. The tiles of the collection are designed to serve both functional and aesthetic purposes. It gives myriad spaces, such as kitchen areas, bathroom spaces, and corridors, a well-defined & remarkable & transformative appeal. Above all, the neutral, understated, and natural tone of surfaces seamlessly blends with the decor of the style of spaces.

EDGE PROFILES



Joint Possibilities

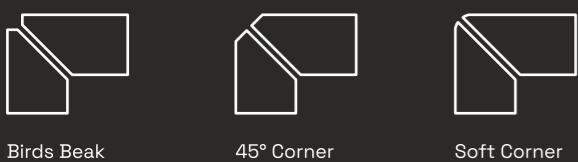

FULL BODY
SERIES



The stunningly crafted tiles of the collection create a symphony of durability with the enduring beauty of spaces. It gives a transformative appeal to abode and stands the test of time and trends.

Witness excellence redefined and elegance reimagined with a carefully designed collection with the artful depiction of designs, elements, and patterns that bring vision into reality.

1200x2400mm
9mm Thickness





Features

All off Erings From the House of STONE ART are Impressively durable, easy to maintain, sustainable, and have a plethora of Features For an effortless lifestyle.



SOLID
BODY



EASY TO
MAIN TAIN



ECOLOGICAL &
SUSTAINABLE



ZERO
MAIN TENANCE



HIGH
STRENGTH



LOW WATER
ABSORPTION



IMPACT
RESISTANCE



Application

The exemplary range of surface from our has unrestricted application possibilities these surface are suitable for application in any space residential or commercial.



RESIDENTIAL



COMMERCIAL
BUILDING



HOTEL,
RESTAURANT



HOSPITAL



HALL &
CORRIDOR



MALL & SUPER
MARKET



AIRPORT





DIGI MATT 5.0 SURFACE




Size
1200x2400mm

Thickness
9mm

Finish
DIGI Matt 5.0

Body
Full body

Endless
2 Phase

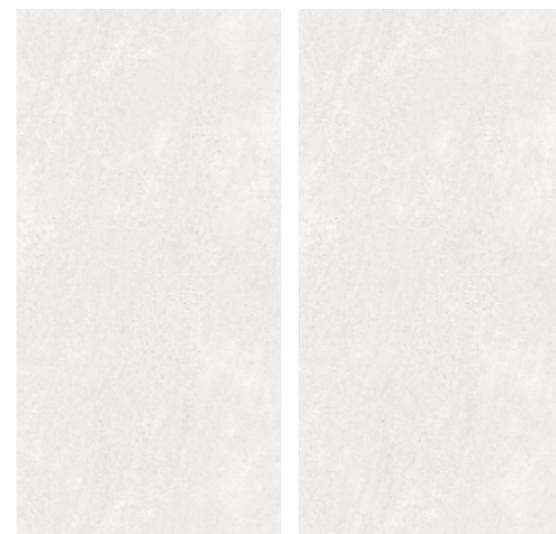

SCAN FOR VISUAL

PRODUCTS
STONE ART LIGHT GREY

FULL BODY SERIES



STONE ART COLLECTION



STONE ART
COLLECTION



PRODUCTS

STONE ART LIGHT GREY / DARK GREY



SCAN FOR VISUAL



DIGI MATT 5.0 SURFACE

Size
1200x2400mm

Thickness
9mm

Finish
DIGI Matt 5.0

Body
Full body

Endless
2 Phase



PRODUCTS
STONE ART DARK GREY

FULL BODY SERIES



STONE ART COLLECTION

STONE ART
COLLECTION

DIGI MATT 5.0
SURFACE



PRODUCTS

STONE ART LIGHT GREY / DARK GREY



SCAN FOR VISUAL



DIGI MATT 5.0 SURFACE


Size
1200x2400mm

Thickness
9mm

Finish
DIGI Matt 5.0

Body
Full body

Endless
2 Phase

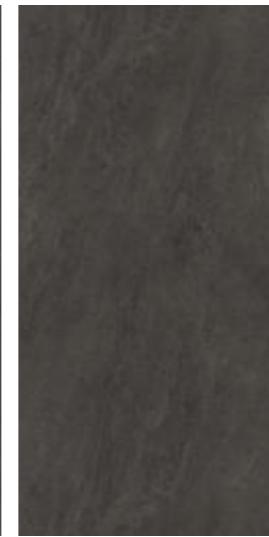

FULL BODY SERIES



PRODUCTS
STONE ART NERO

STONE ART
COLLECTION



PRODUCTS
STONE ART NERO



DIGI MATT 5.0
SURFACE



SCAN FOR VISUAL



DIGI MATT 5.0 SURFACE



Size
1200x2400mm

Thickness
9mm

Finish
DIGI Matt 5.0

Body
Full body

Endless
2 Phase



SCAN FOR VISUAL

PRODUCTS
STONE ART IVORY

FULL BODY SERIES



STONE ART COLLECTION

STONE ART
COLLECTION

DIGI MATT 5.0
SURFACE



PRODUCTS
STONE ART IVORY



SCAN FOR VISUAL



DIGI MATT 5.0 SURFACE

Size
1200x2400mm

Thickness
9mm

Finish
DIGI Matt 5.0

Body
Full body

Endless
2 Phase



PRODUCTS
STONE ART WALNUT



SCAN FOR VISUAL

FULL BODY SERIES



STONE ART
COLLECTION

STONE ART
COLLECTION

DIGI MATT 5.0
SURFACE



PRODUCTS
STONE ART WALNUT





SCAN FOR VISUAL


MANUALLY TRANSPORTING SLAB

Only for 1/4" Slabs


MOVING A SLAB

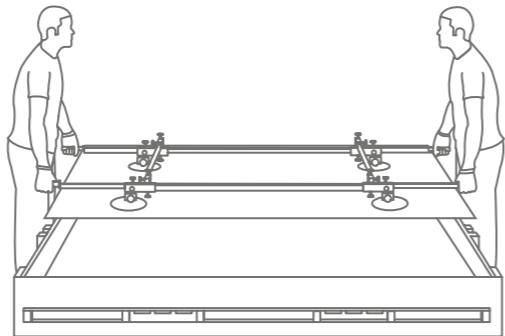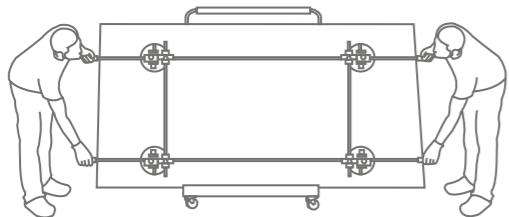

RAISING A IMMODERATE SLAB ONTO A BENCH

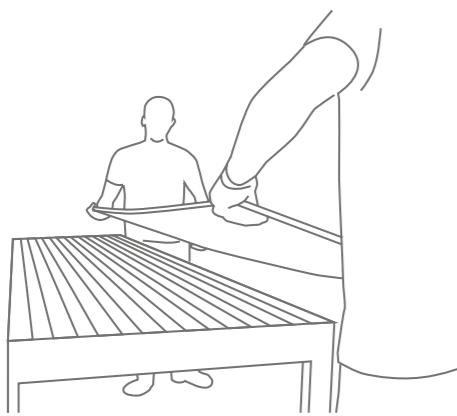


✗ INCORRECT

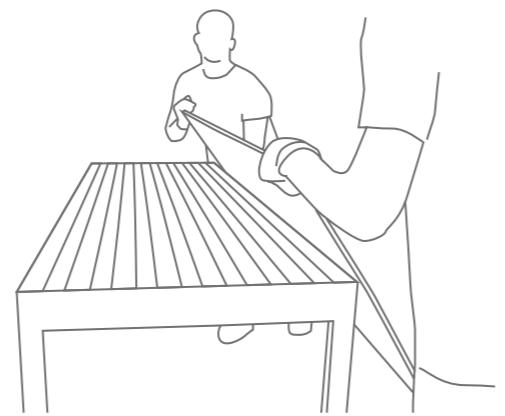


✓ CORRECT

HANDLING IMMODERATE SLAB FOR WALL

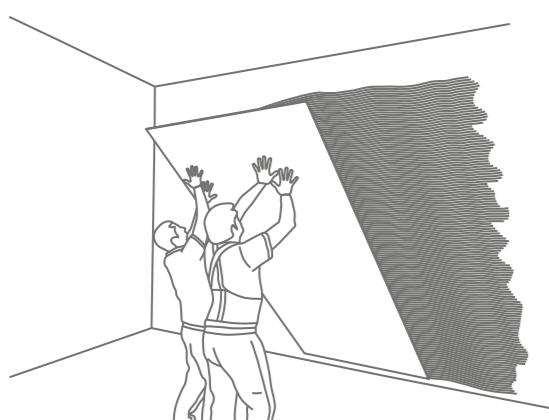


✗ INCORRECT

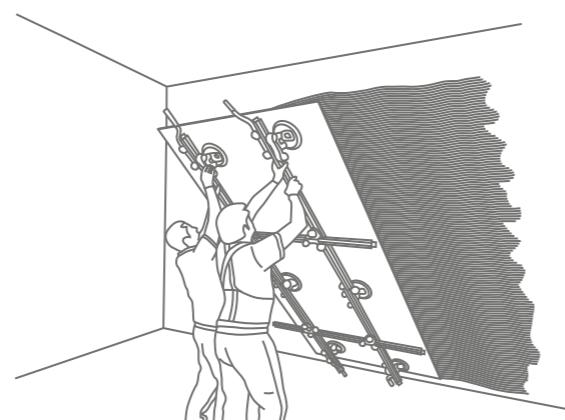

✓ CORRECT



WORKING WITH THE VARIOUS VERSIONS OF SLAB

CUTTING WITH DIAMOND DISCS

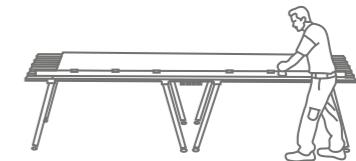


Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of Disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). It may be required to cool the disc with water. Recommended discs are the thin types generally used for cutting porcelain stoneware. The surface should be kept on a FLAT base while cutting without any gap underneath.

DRILLING

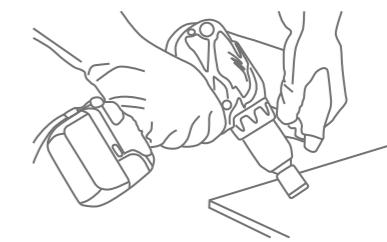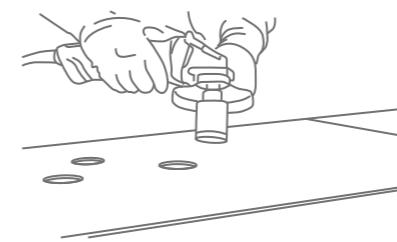

You can use cutting discs fitted to battery-operated screwdrivers or angle grinders, or electrical drills as an alternative.

INTERNAL CUT/L-SHAPED CUT


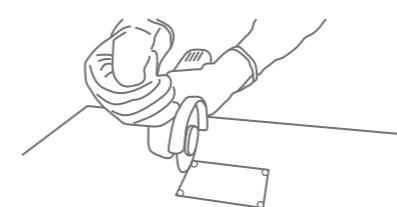


To get internal and L-shaped corners & to reduce the risk of breakage, cut 'o' at the vertex of the internal corners using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs, and more follow the instructions provided below:

When using these tools:

- Cool the point being drilled with water
- Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on
- If you are using tungsten bits, start drilling at a low speed
- If you are using drills or screwdrivers, do not select hammering mode

EDGE-FINISHING

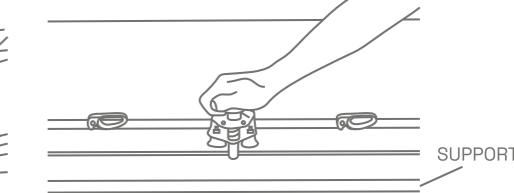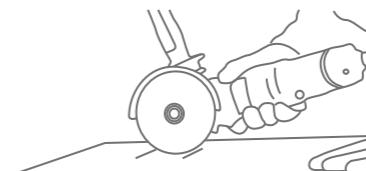

INSTRUCTIONS FOR MANUAL INSTALLATION


SINGLE LAYER METHOD



DOUBLE-LAYER METHOD



COMPRESSING THE SLAB



IMPORTANT

All cutout corners must have a minimum diameter of 1/4". Never leave 90° angles. We recommend a radius of more than 1/4" when the kitchen design allows as it makes the countertop firmer.



✓ CORRECT

✗ INCORRECT

✗ INCORRECT

✗ INCORRECT

CLEANING & MAINTENANCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

| TYPE OF STAIN | CHEMICAL PRODUCT | EXAMPLE |
|---------------|--------------------|--|
| Grease | Alkaline - Solvent | Detergent |
| Oil | Solvent | Ammonia, Baking Soda |
| Ink | Oxidant - Solvent | Alcohol, Liquid Bleach, Nail Paint Remover |
| Rust | Acid | Hydrochloric Acid, Vinegar, Red Harpic |
| Lime | Acid | Descaling Agents, Hydrochloric Acid |
| Cement | Acid | Hydrochloric Acid |
| Wine | Alkaline | Ammonia, Liquid Bleach |
| Coffee | Alkaline - Solvent | Ammonia, Liquid Bleach |
| Rubber | Solvent | Alcohol, Thinner |
| Plaster | Acid | Hydrochloric Acid |
| Candle | Solvent | Alcohol, Thinner |
| Wax | Oxidant | Liquid Bleach |
| Iodine | Acid | Liquid Bleach |
| Blood | Solvent | Liquid Bleach |
| Ice Cream | Oxidant | Liquid Bleach |
| | Alkaline | Liquid Bleach |

Note: It is recommended that any kind of stain needs to be cleaned immediately, as soon as possible.

TECHNICAL SPECIFICATIONS

| CHARACTERISTICS | STANDARD AS PER ISO-13006/2018 En14411 gr.bla | MOTTO VALUE | TEST METHOD |
|--------------------------------------|---|-----------------------------|-----------------|
| Regulatory Properties | | | |
| Deviation in Length & Width | +0.5% | +0.2% | ISO 10545-2 |
| Deviation in Thickness | +5% | +5% | ISO 10545-2 |
| Straightness of Sides | +0.5% | +0.2% | ISO 10545-2 |
| Rectangularity | +0.5% | +0.2% | ISO 10545-2 |
| Surface Flatness | +0.5% | +0.3% | ISO 10545-2 |
| Colour Difference | ΔE<1.00 | ΔE<0.30 | ISO 10545-16 |
| Glossiness | As per Mfg. | >90% | Gloss Meter 60° |
| Structural Properties | | | |
| Water Absorption | <0.5 % | <0.3% | ISO 10545-3 |
| Apparent Density | As Per Mfg. | >2.20 g/cc | ISO 10545-3 |
| Massive Mechanical Properties | | | |
| Modulus of Rupture | Min.35N/mm ² | Min.40N/mm ² | ISO 10545-4 |
| Breaking Strength | Min. 1300 N | Min. 2000 N | ISO 10545-4 |
| Impact Resistance | As per Mfg. | Min. 0.55 | ISO 10545-4 |
| Surface Mechanical Properties | | | |
| Surface Abrasion Resistance | As per Mfg. | Min. class 3 | ISO 10545-7 |
| Mohs Hardness | As per Mfg. | Min. class 4 | BS EN 15771 |
| Thermo Hygrometric Properties | | | |
| Frost Resistance | As Per Mfg. | Frost Proof | ISO 10545-12 |
| Thermal Shock Resistance | Min. 10 Cycle | Min. 10 Cycle | ISO 10545-9 |
| Moisture Expansion | Max. 0.6mm/m | Max. 0.02mm/m | ISO 10545-10 |
| Thermal Expansion | Max. 9.0 x 10 ⁻⁶ | Max. 6.0 x 10 ⁻⁶ | ISO 10545-8 |
| Chemical Properties | | | |
| Chemical Resistance | As Per Mfg. | No Damage | ISO 10545-13 |
| Stain Resistance | Resistant | Resistant | ISO 10545-14 |
| Safety Properties | | | |
| Slip Resistance | As per Mfg. | N. A. | DIN 51130 |
| Fire Resistance | As per Mfg. | Fire Proof | N. A. |

PACKING DETAILS

| Dimension (mm) | No. of Pcs/Box | Square Feet | Weight (Approx) |
|----------------|----------------|-------------|-----------------|
| 1200x2400mm | 1 Pcs. | 31.0 Sq. ft | 61 kg. |