



BOUNDLESS BEAUTY



BALI STONE
SERIES



800x2400mm

15mm Thickness



ABOUT US

Motto is one of the most dynamic & productive brands of the modern ceramic world that is brought to life by a visionary person Mr. Mahendra Patel. Over the years the company has developed manyfold.

Since 2004 - the inception year, to today we have expanded our reach to national & international arenas with a capillary presence in more than 70+ countries with 2500 satisfied customers.

Finest skills clubbed with state of the art technology have helped us to carve a niche, which is stamped by authorities as we are ISO 9001 : 2018 Certified. Overall the company has marked its position as the leading Manufacturer, Exporter and Supplier of the exquisite Ceramic Porcelain Tiles for Wall & Floor.



Italian Technology

FLEXIBLE BODY

BASK IN BALISTONE'S UNIQUE GRANDEUR


Balistone collection is designed exclusively to offer an experience that envelops you in timeless sophistication.

Each piece is a statement of artistic expression, created to elevate any of your space. The intricate designs and flawless finishes reflect the dedication to quality Balistone stands for.

BALI STONE
SERIES



FULL BODY
SERIES

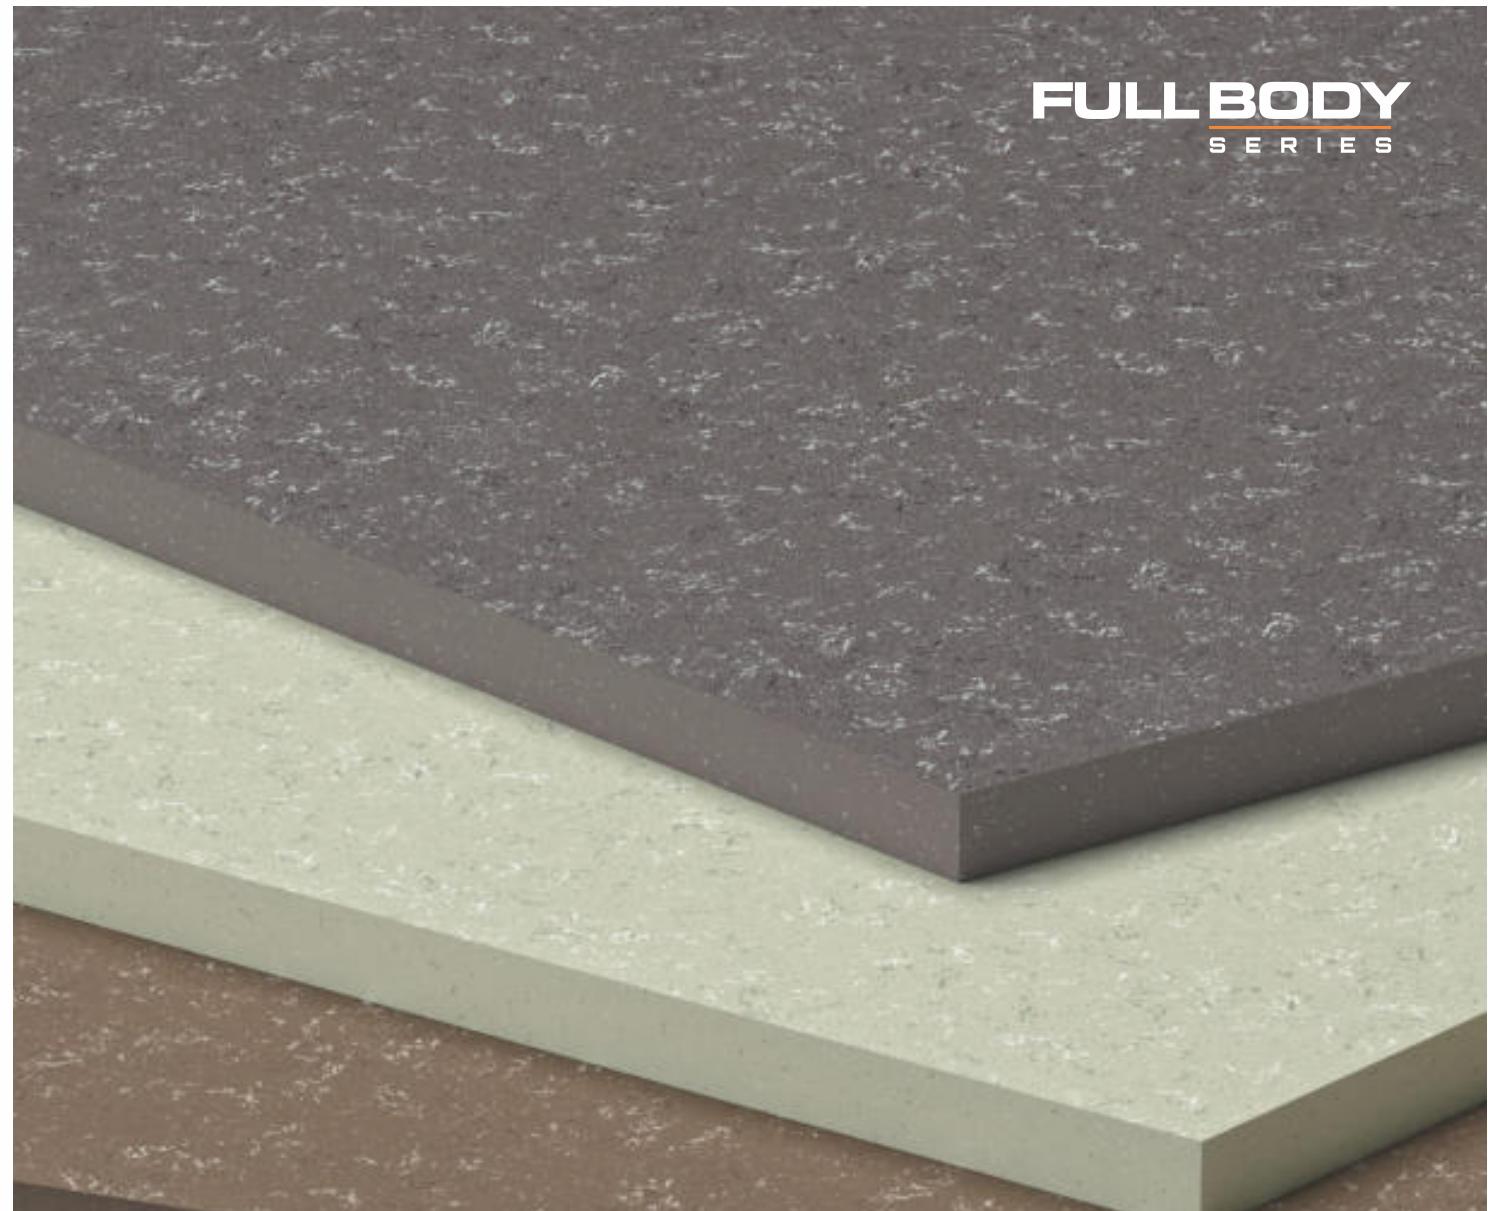

DISCOVER REGAL SURFACES

These surfaces exude majesty, creating a welcoming ambiance. Infuse your space with minimalist modernism and allow Balistone to reflect your style.



15mm THICKNESS

These surfaces are incredibly durable, easy to maintain, and require minimum effort to keep them looking pristine.



EDGE PROFILES



Squared ridge at 45°



Rounded ridge at 45°



Straight squared ridge

JOINT POSSIBILITIES



Rounded straight ridge



Double straight squared ridge



Double straight rounded ridge



Birds beak



45° corner



Soft corner

**AVAILABLE IN A
MYRIAD OF COLORS
AND TEXTURES,
THESE TILES OFFER
ENDLESS POSSIBILITIES
FOR CREATING SPACES
THAT INSPIRE.**

SIZE: 800x2400mm

THICKNESS: 15mm

FINISH: MATT



Perfect for any setting, these tiles make a statement of refine taste, ensuring your spaces remain stunning for years to come.

APPLICATION POSSIBILITIES

These surfaces seamlessly integrate with any architectural style, making them versatile and ideal for any setting.



Stair Case



Bathroom Vanities



Kitchen Counter Top



Dining Area

Living Room	Residential Areas
TV Room	Commercial Areas
Study Table	Children's Room
Flooring	Bedroom Area

INDEX

BALI STONE
SERIES



BALISTONE ROYAL BLUE



BALISTONE ASH



BALISTONE RAHINO



BALISTONE FOG



BALISTONE MOSS



BALISTONE LICHI



BALISTONE GREEN



BALISTONE PEARL


Balistone Royal Blue

Italian Technology


FLEXIBLE BODY



FULL BODY
SERIES

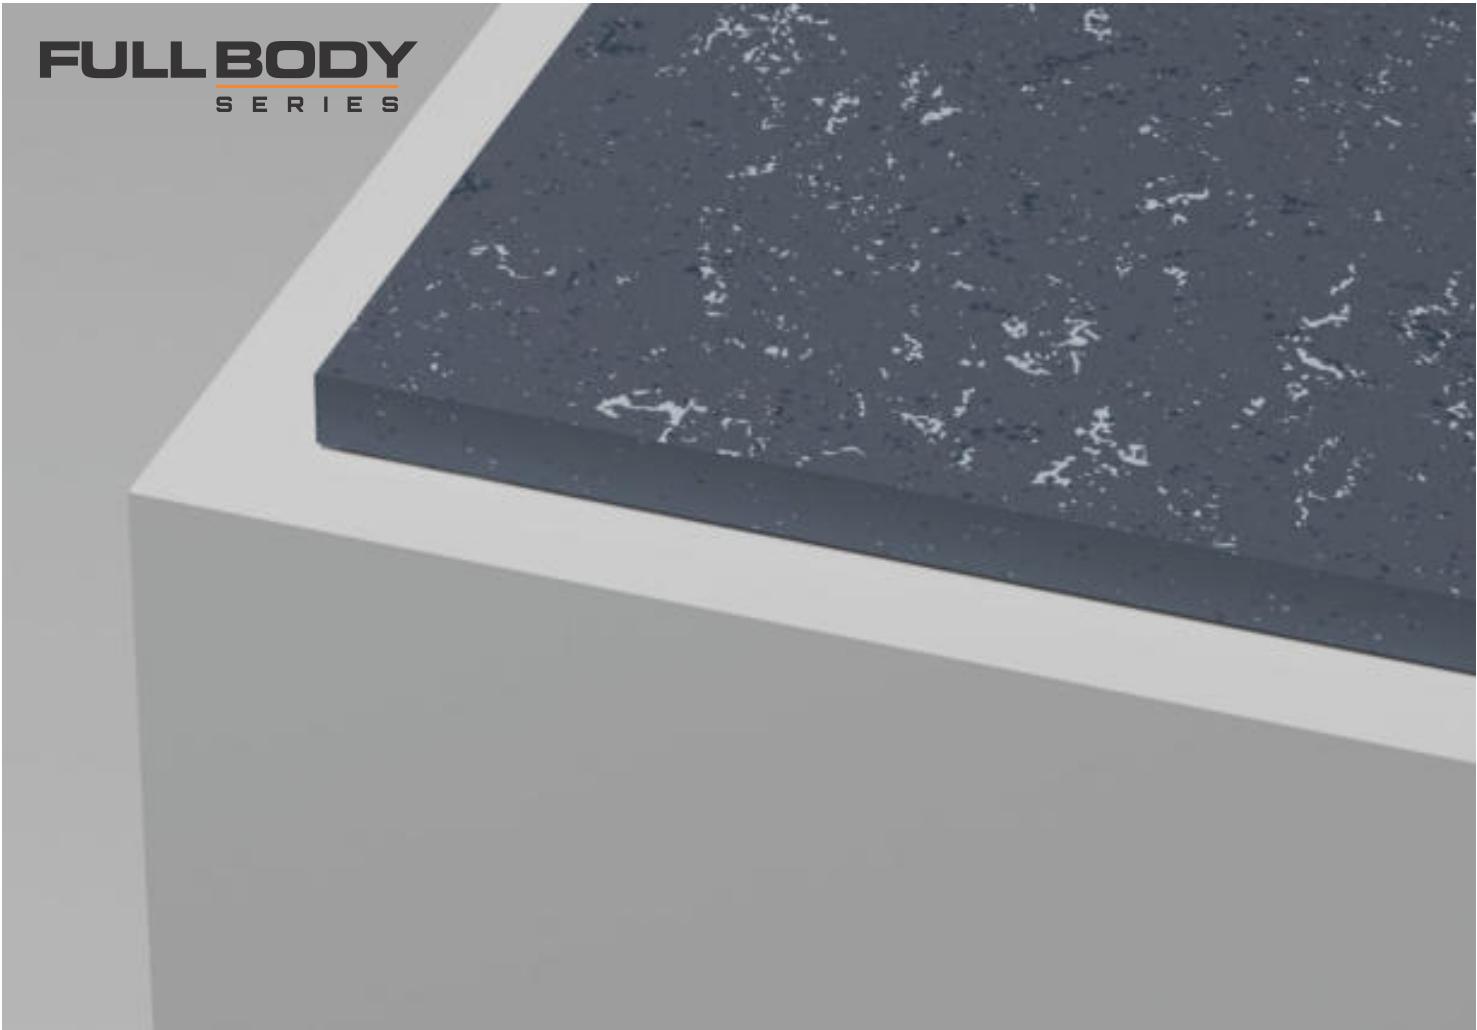

BALI STONE
SERIES

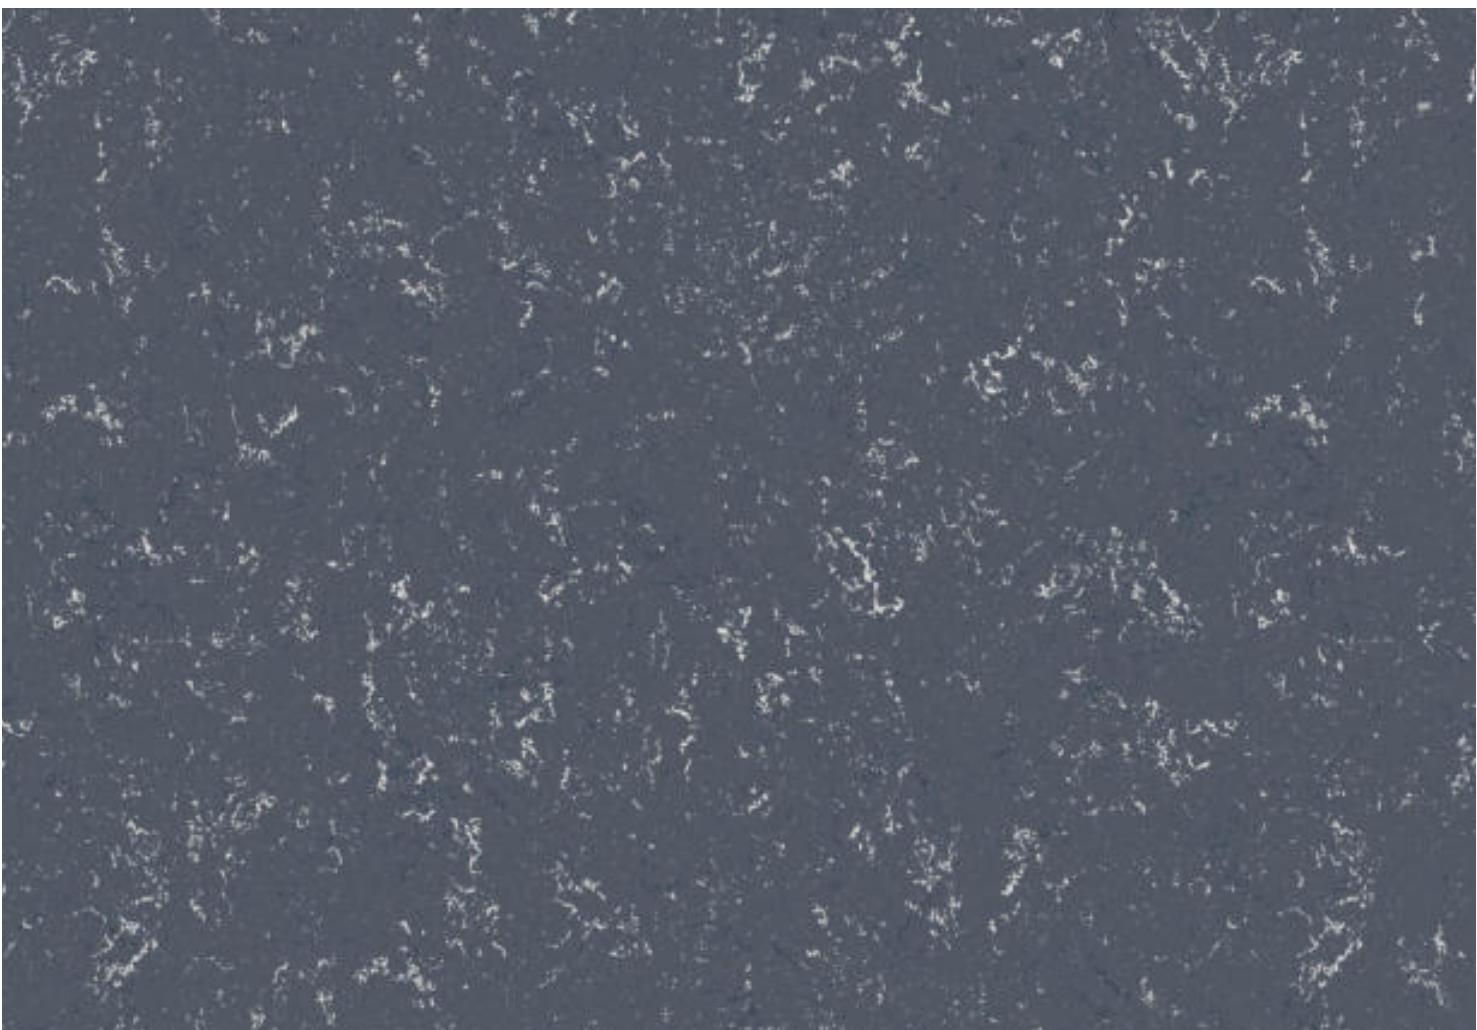

BALISTONE ROYAL BLUE

SIZE: 800x2400mm

THICKNESS: 15mm

FINISH: MATT

SCAN FOR
VIRTUAL
360°




Balistone Ash


Italian Technology |  FLEXIBLE BODY



FULL BODY
SERIES

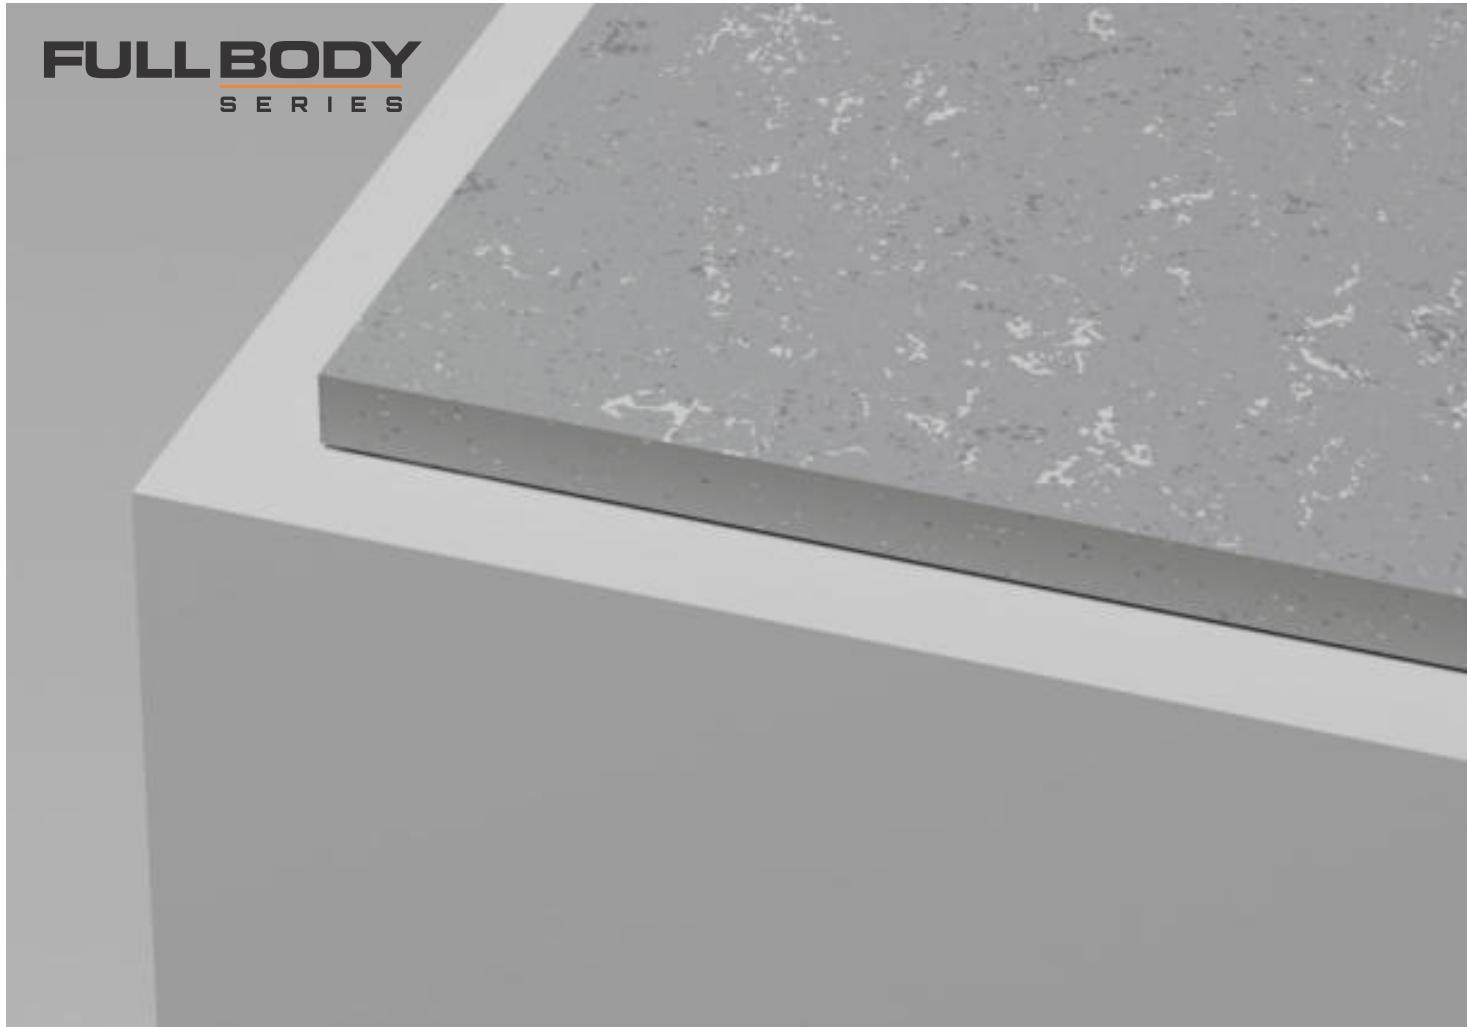

BALI STONE
SERIES

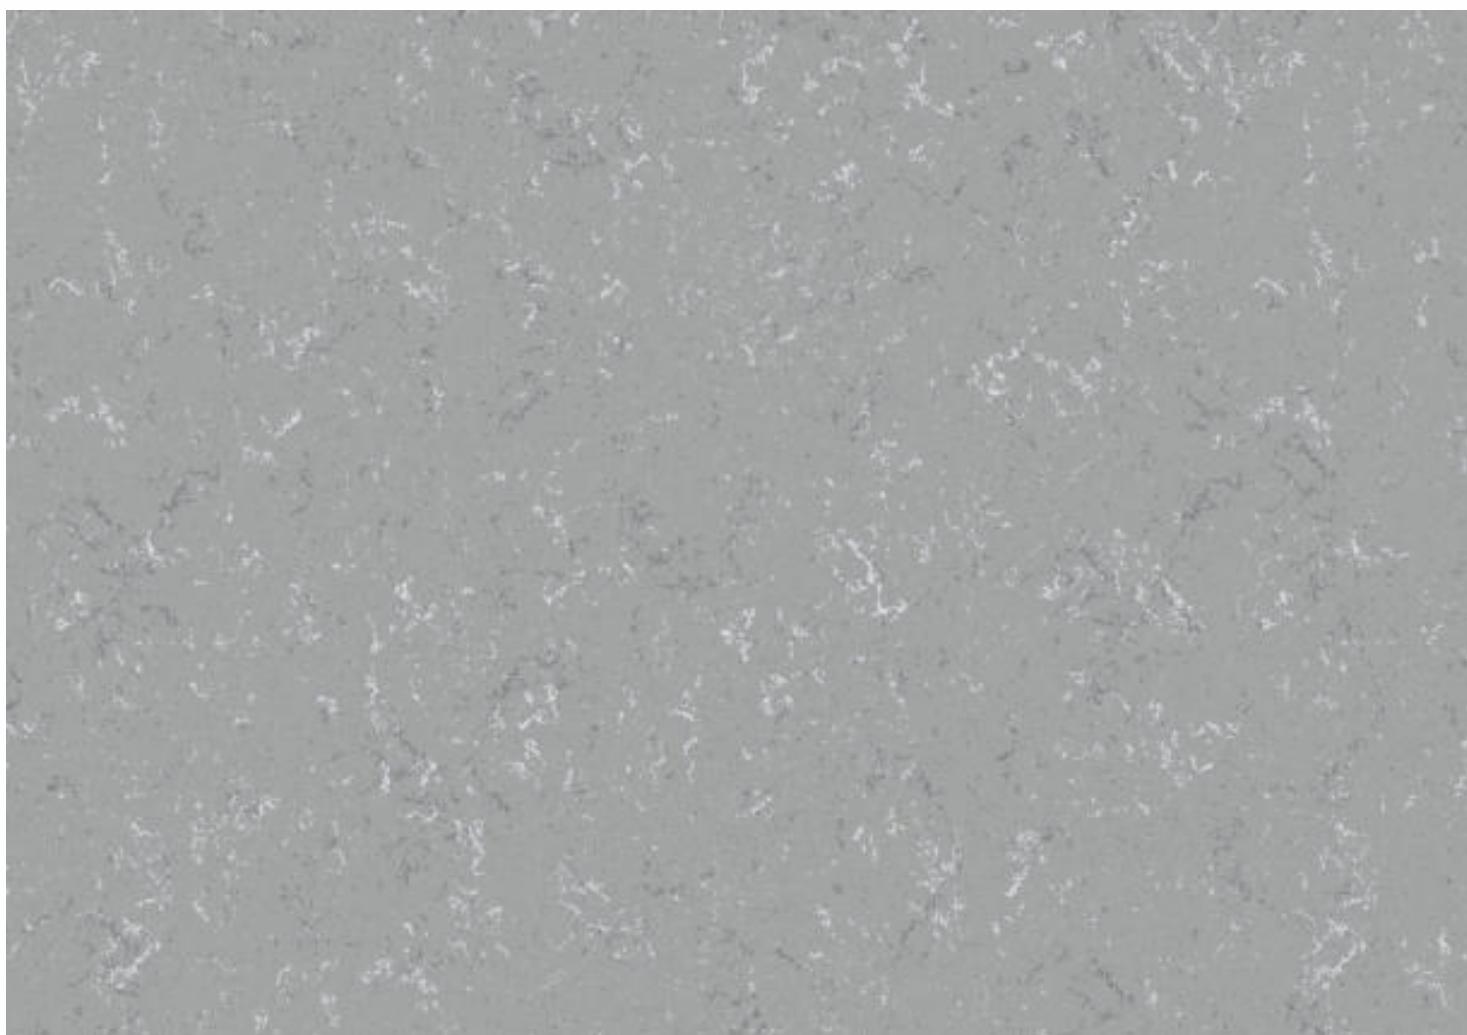

BALISTONE ASH

SIZE: 800x2400mm

THICKNESS: 15mm

FINISH: MATT

SCAN FOR
VIRTUAL
360°






FULL BODY
SERIES



BALI STONE
SERIES

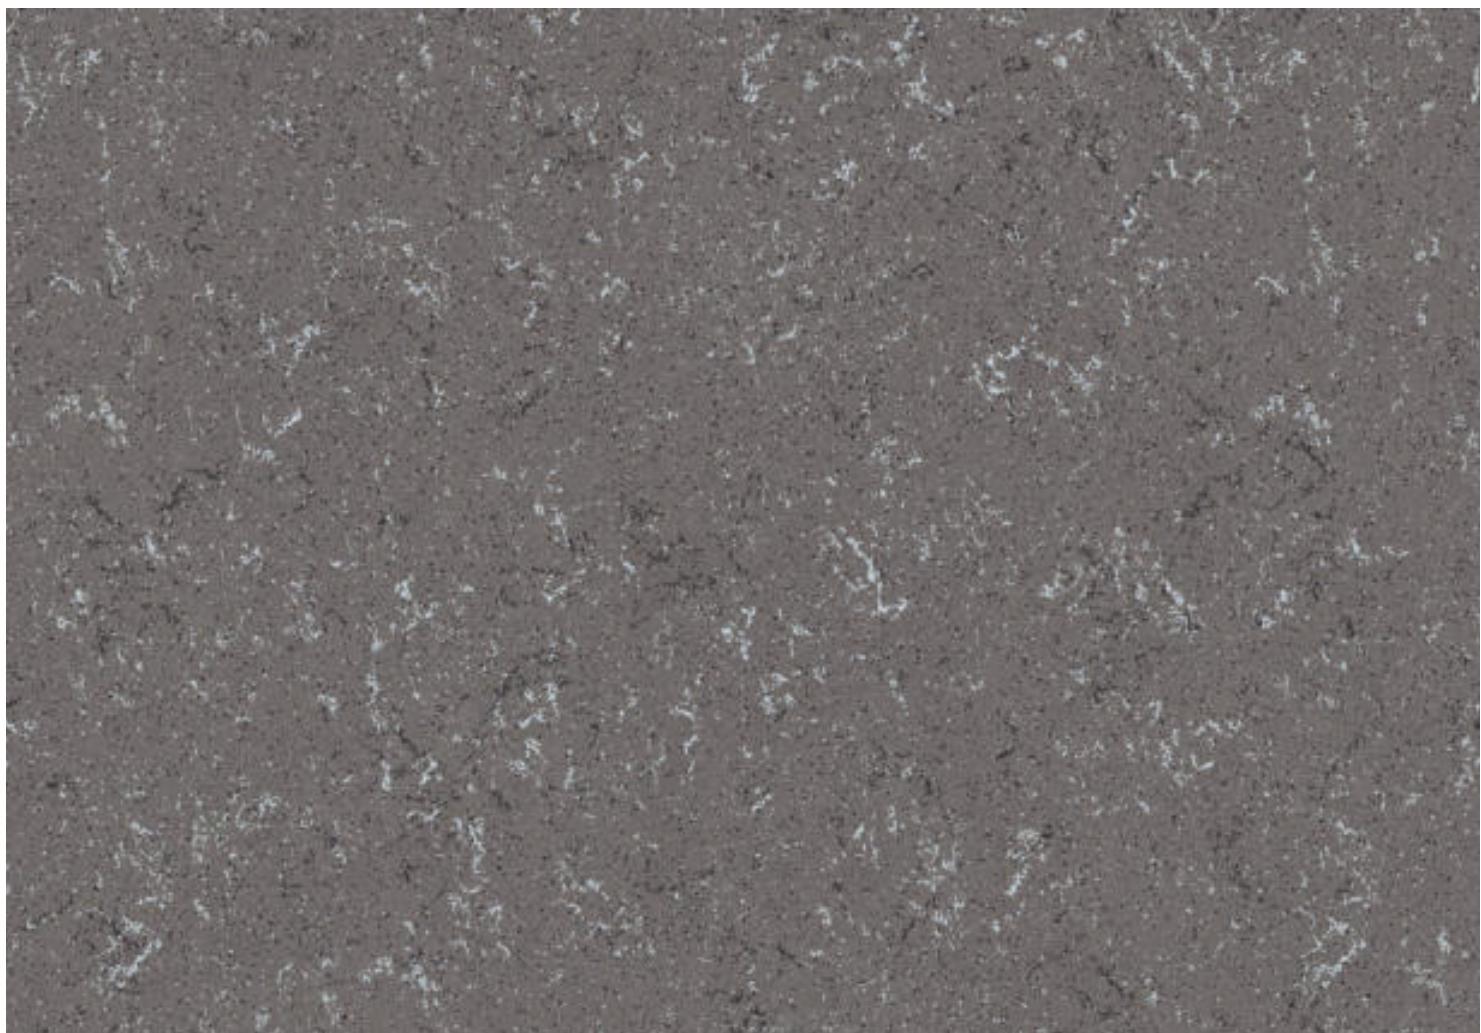

BALISTONE RAHINO

SIZE: 800x2400mm

THICKNESS: 15mm

FINISH: MATT

SCAN FOR
VIRTUAL
360°



mottogroup.in



Balistone Fog

Italian Technology


FLEXIBLE BODY



FULL BODY
SERIES



BALI STONE
SERIES

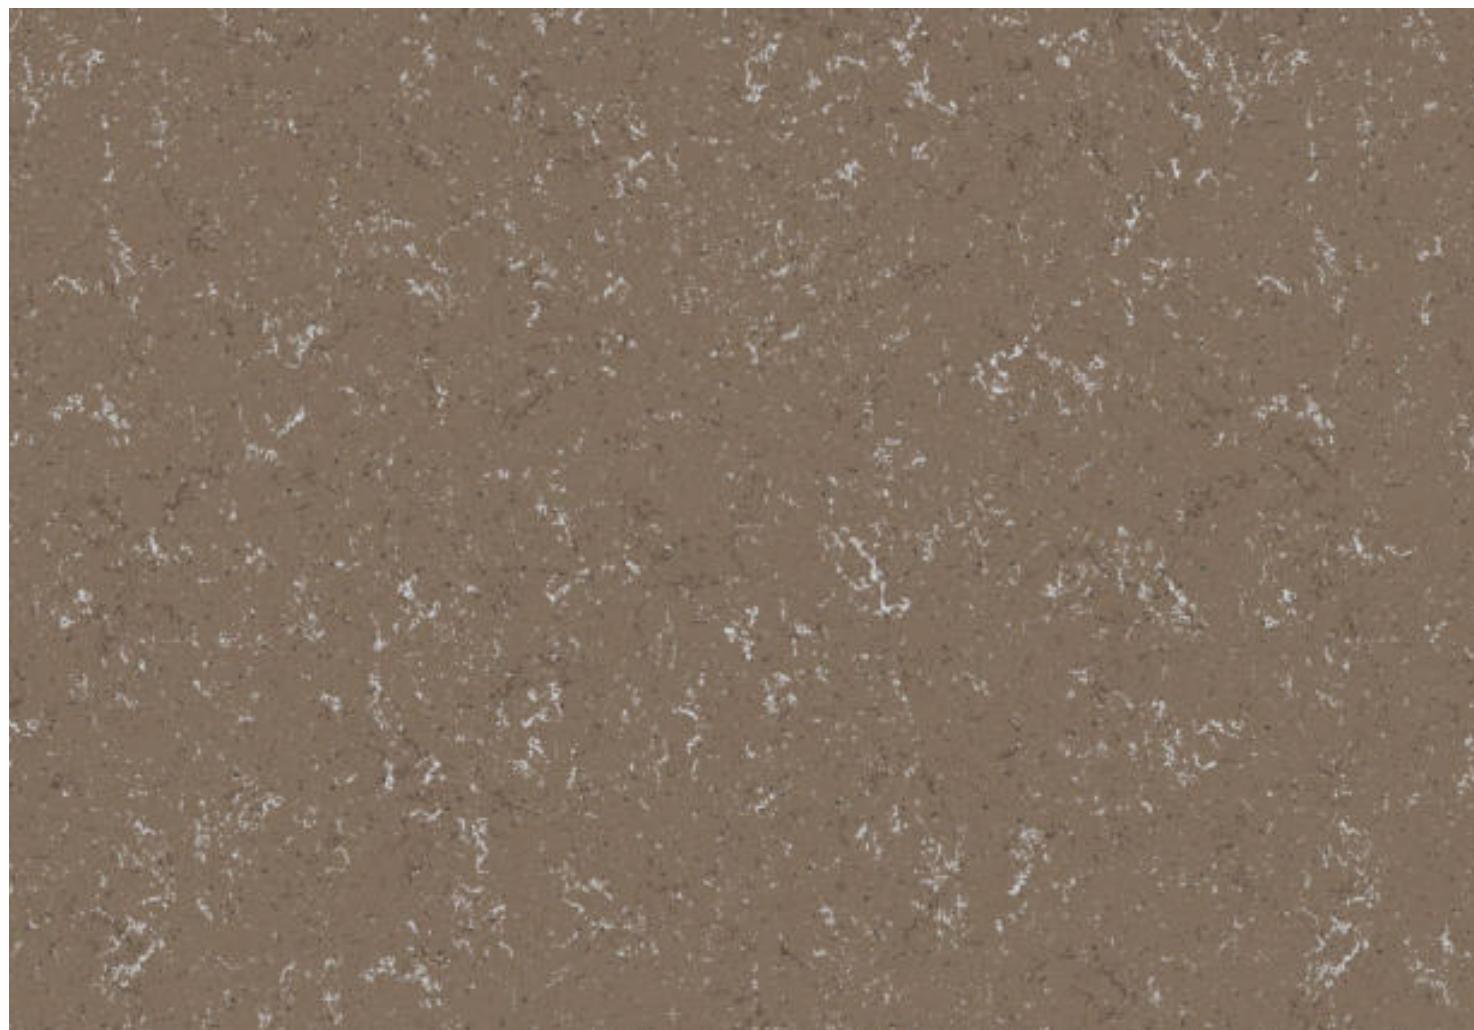

BALISTONE FOG

SIZE: 800x2400mm

THICKNESS: 15mm

FINISH: MATT

SCAN FOR
VIRTUAL
360°





FULL BODY
SERIES



BALI STONE
SERIES



BALISTONE MOSS

SIZE: 800x2400mm

THICKNESS: 15mm

FINISH: MATT

SCAN FOR
VIRTUAL
360°





FULL BODY
SERIES



BALI STONE
SERIES



BALISTONE LICHI

SIZE: 800x2400mm

THICKNESS: 15mm

FINISH: MATT

SCAN FOR
VIRTUAL
360°




Balistone Green

Italian Technology


FLEXIBLE BODY



FULL BODY
SERIES

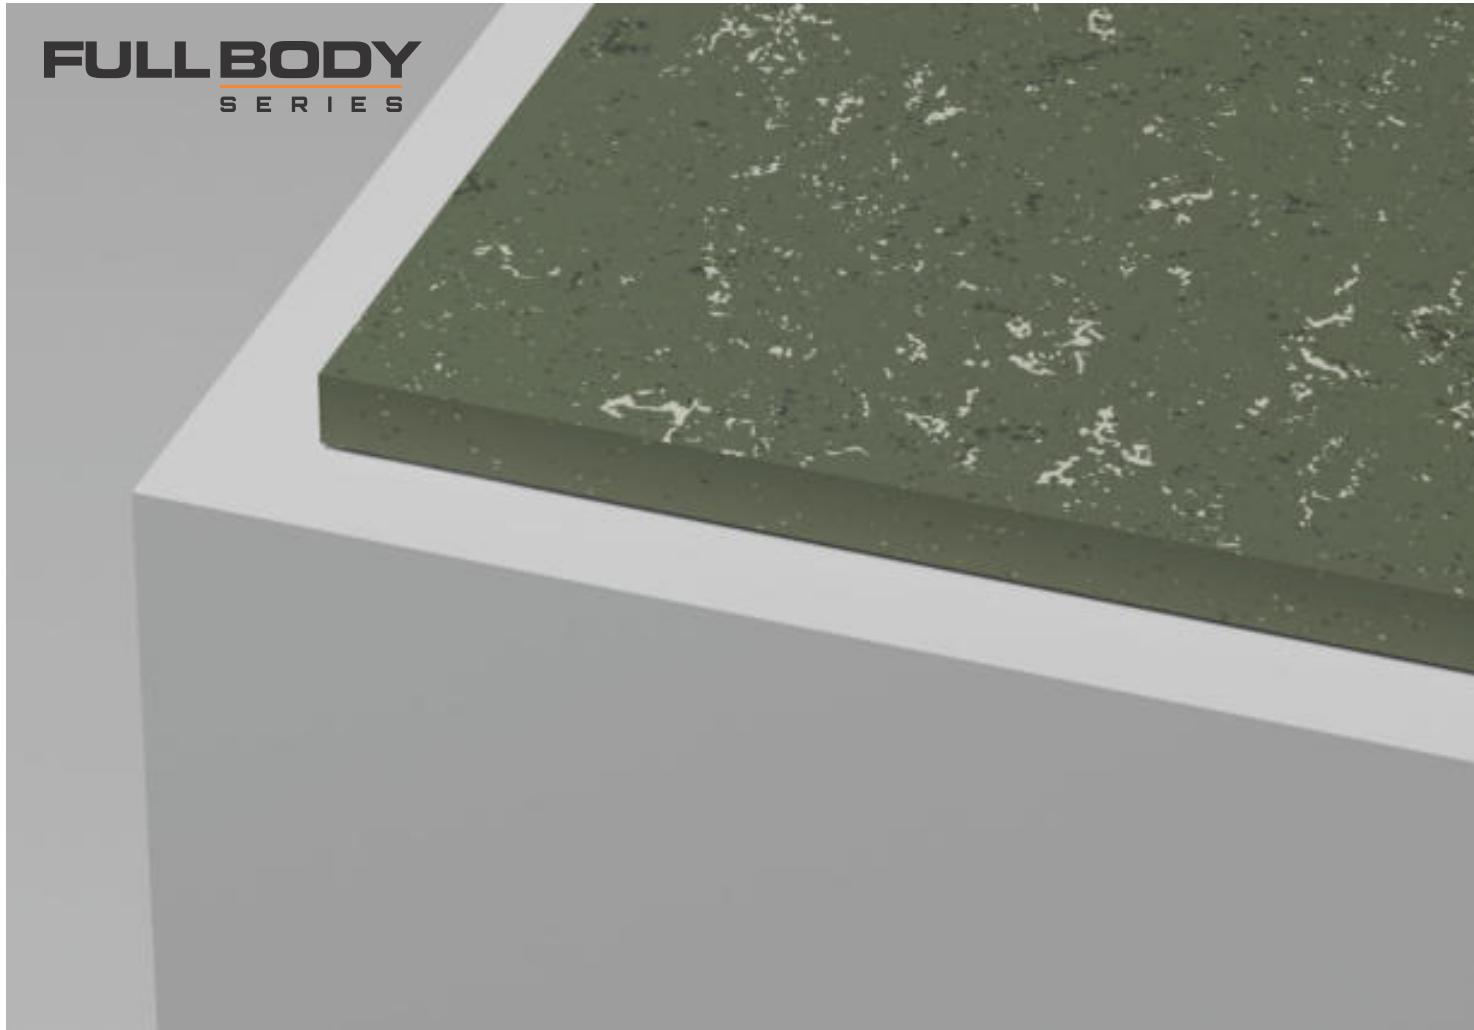

BALI STONE
SERIES

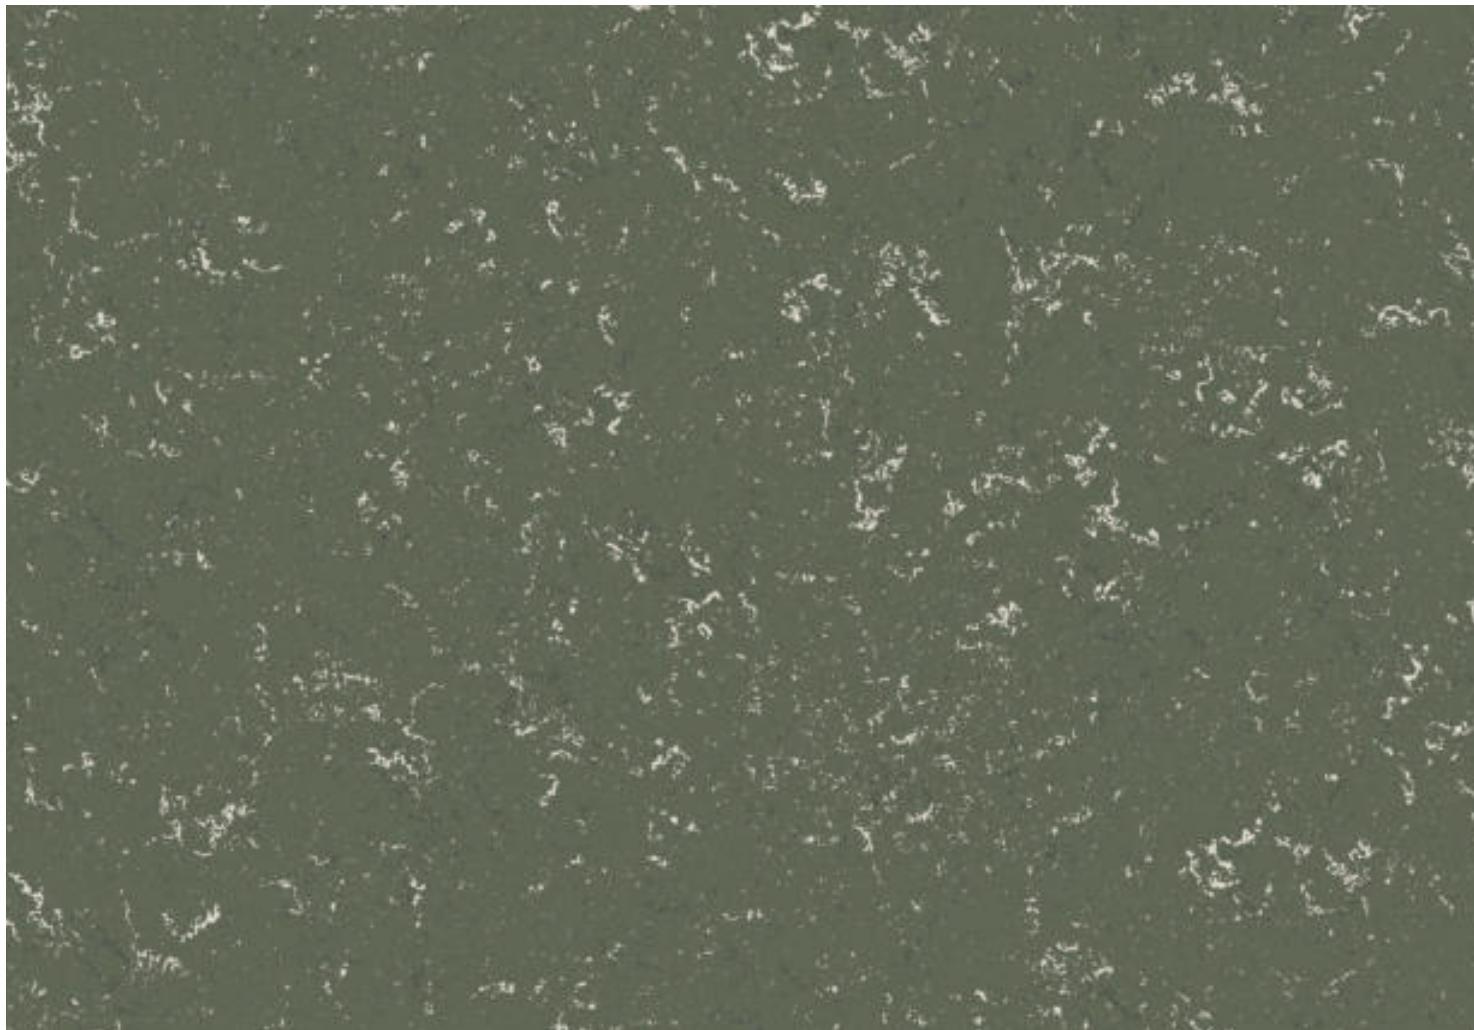

BALISTONE GREEN

SIZE: 800x2400mm

THICKNESS: 15mm


FINISH: MATT

SCAN FOR
VIRTUAL
360°






FULL BODY
SERIES

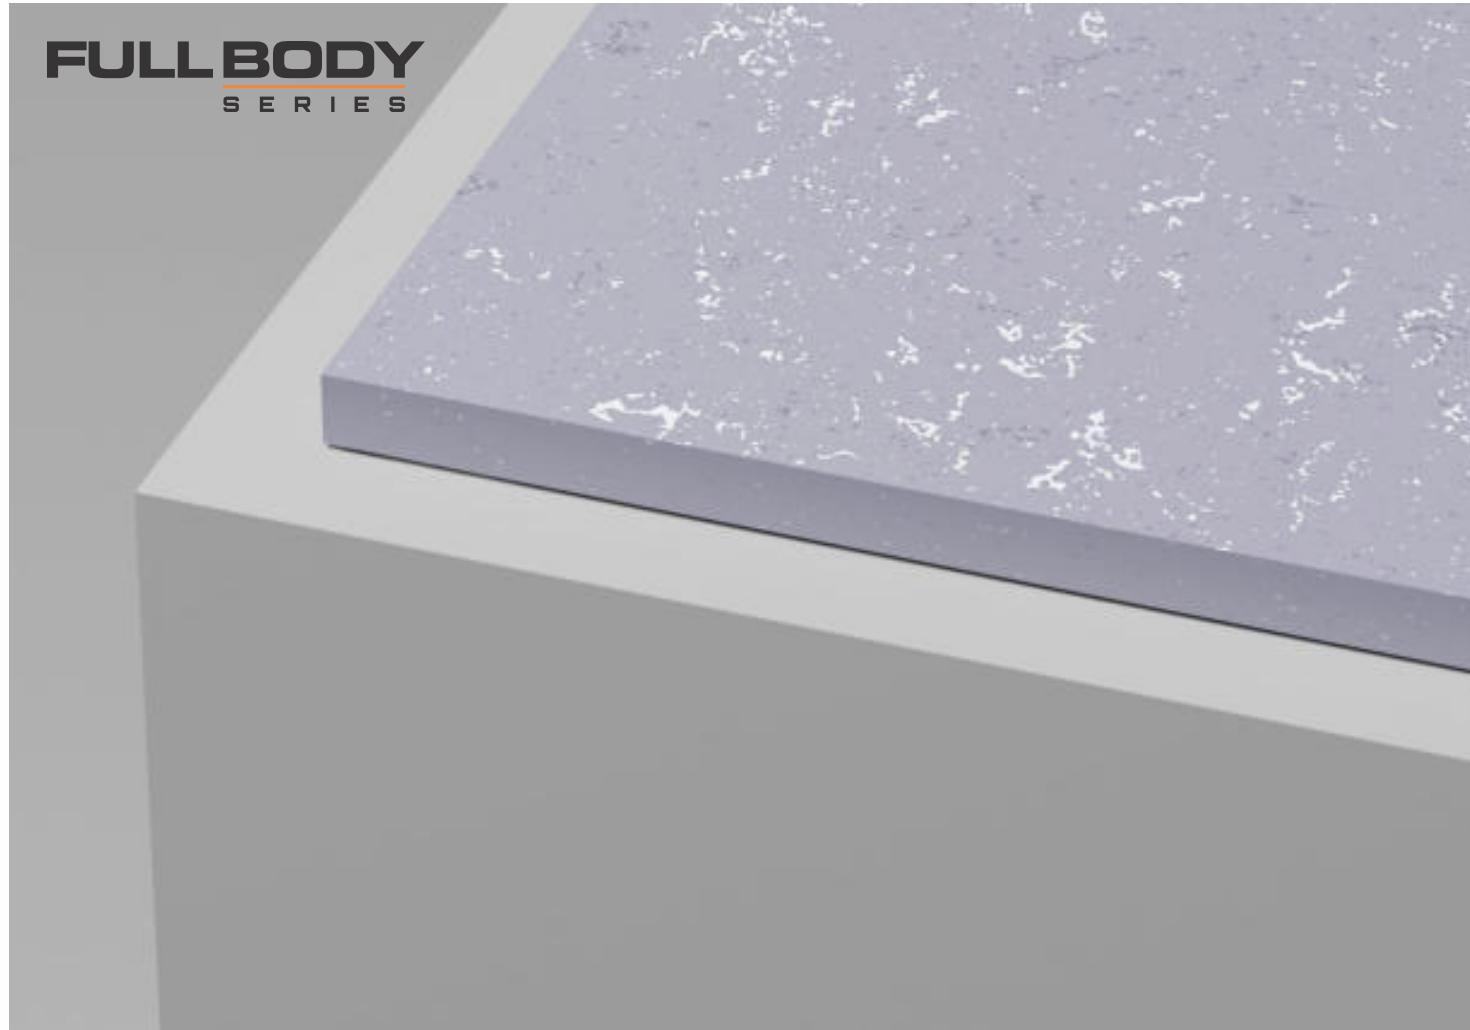

BALI STONE
SERIES

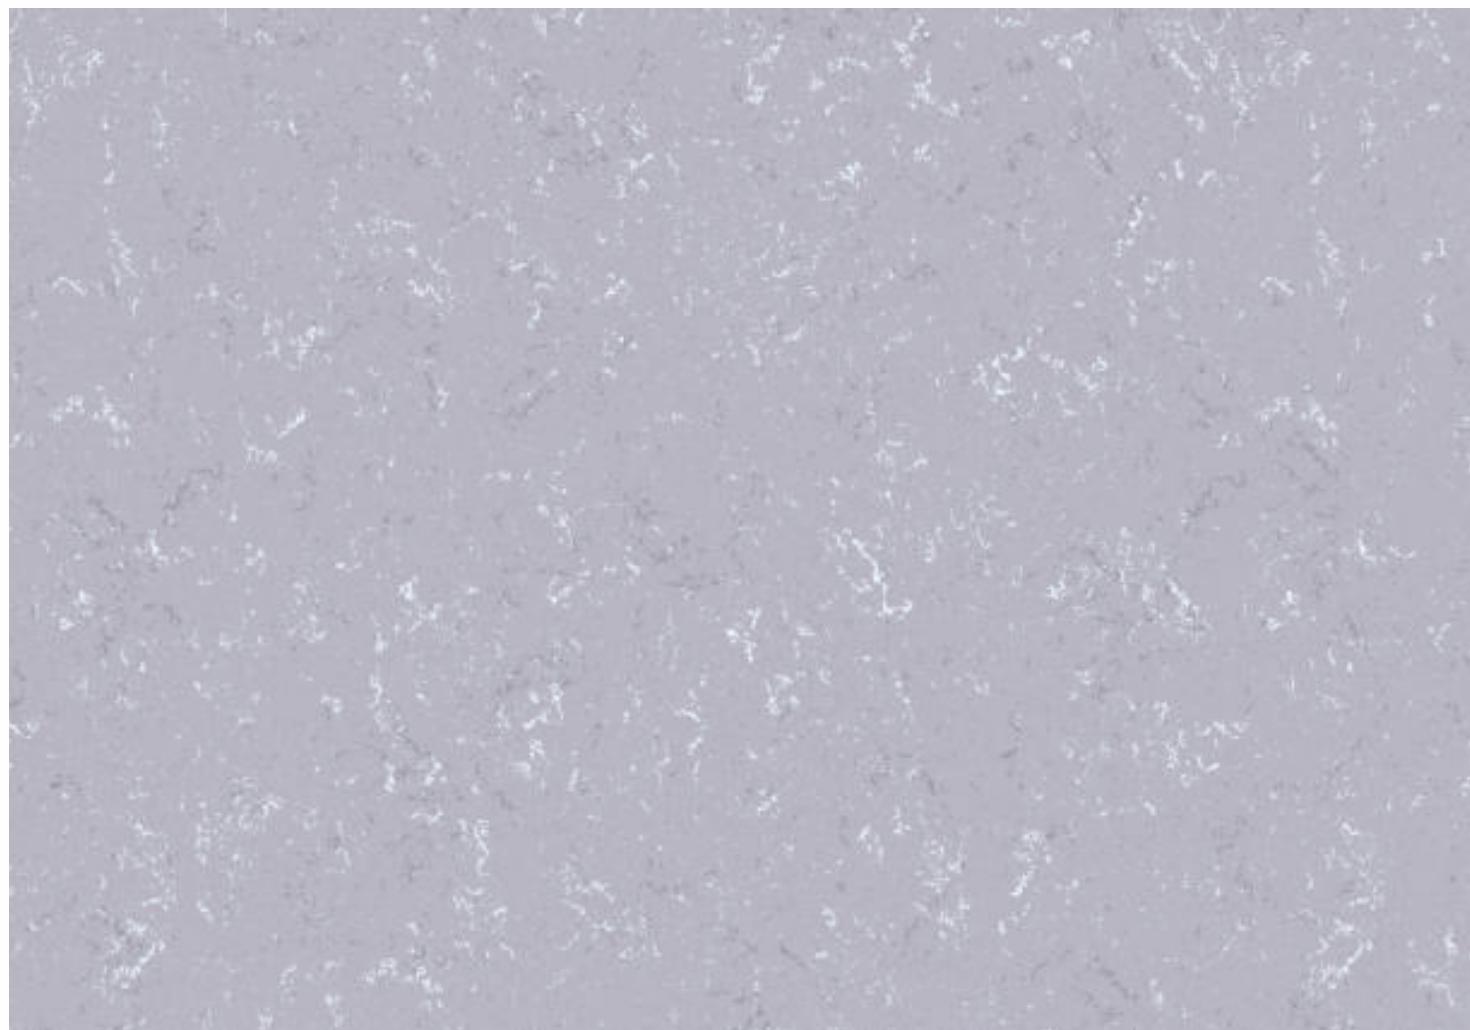

BALISTONE PEARL

SIZE: 800x2400mm

THICKNESS: 15mm

FINISH: MATT



SCAN FOR
VIRTUAL
360°





MANUALLY TRANSPORTING SLAB

Only for 1/4" Slabs

MOVING A SLAB

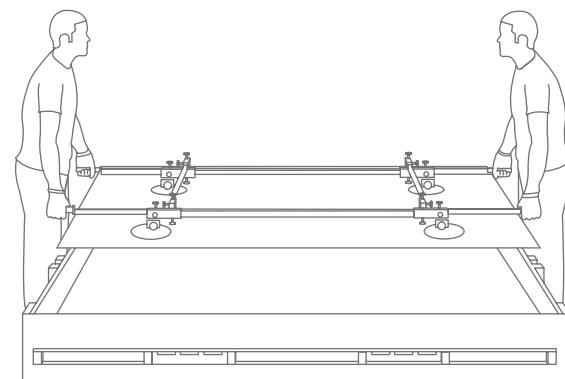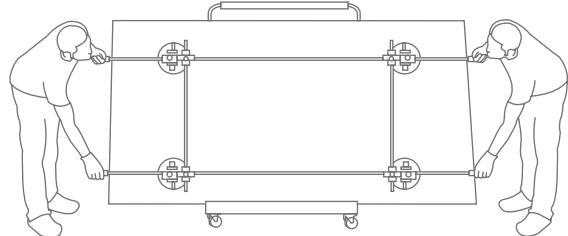



RAISING A IMMODERATE SLAB ONTO A BENCH

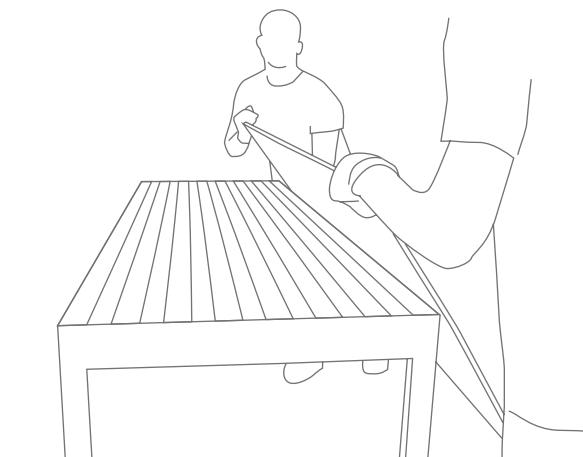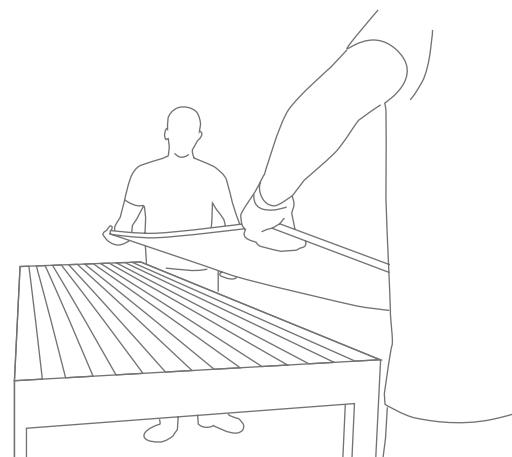

✗ INCORRECT

✓ CORRECT

HANDLING IMMODERATE SLAB FOR WALL

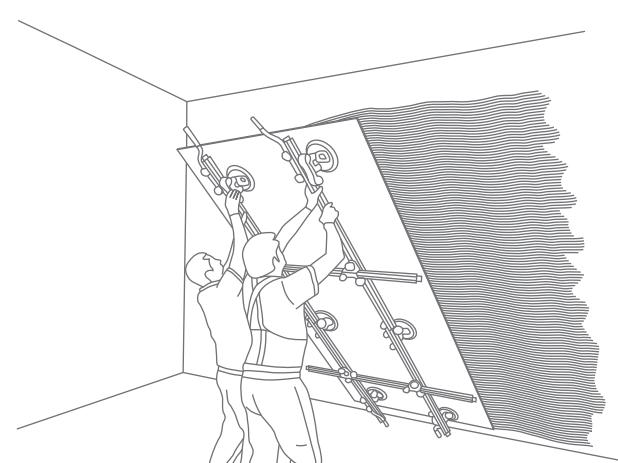
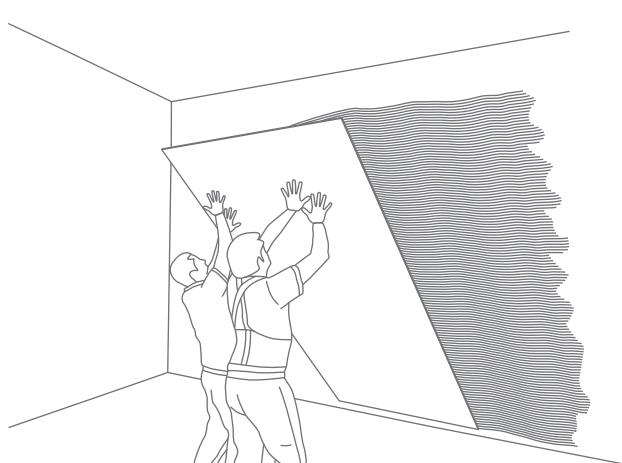


✗ INCORRECT

✓ CORRECT



WORKING WITH THE VARIOUS VERSIONS OF SLAB

CUTTING WITH DIAMOND DISCS

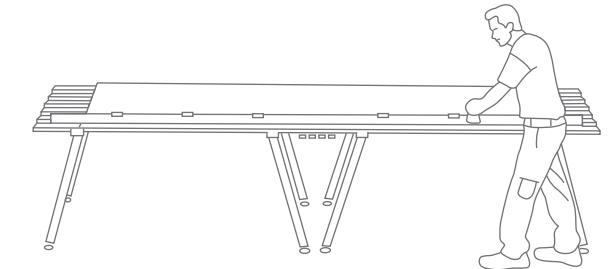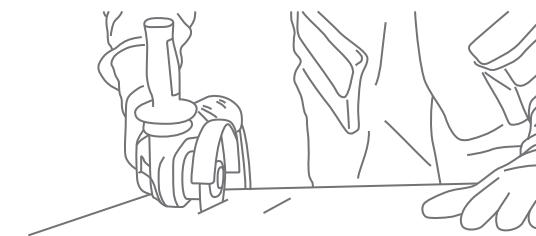


Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of Disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). It may be required to cool the disc with water. Recommended discs are the thin types generally used for cutting porcelain stoneware. The surface should be kept on a FLAT base while cutting without any gap underneath.

DRILLING

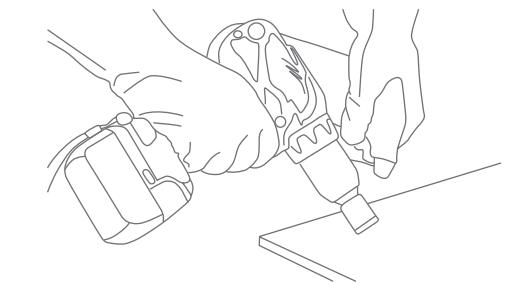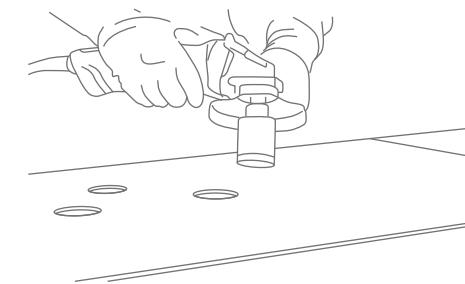

You can use cutting discs fitted to battery-operated screwdrivers or angle grinders, or electrical drills as an alternative.

INTERNAL CUT/L-SHAPED CUT


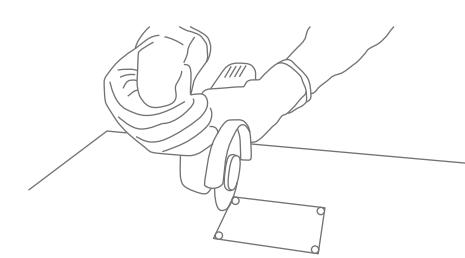


To get internal and L-shaped corners & to reduce the risk of breakage, cut 'o' at the vertex of the internal corners using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs, and more follow the instructions provided below:

When using these tools:


- Cool the point being drilled with water
- Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on
- If you are using tungsten bits, start drilling at a low speed
- If you are using drills or screwdrivers, do not select hammering mode

EDGE-FINISHING

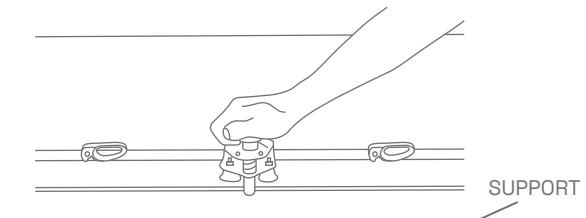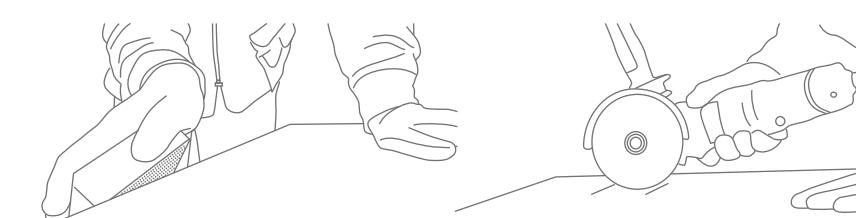


INSTRUCTIONS FOR MANUAL INSTALLATION


SINGLE LAYER METHOD



DOUBLE-LAYER METHOD



COMPRESSING THE SLAB



IMPORTANT

All cutout corners must have a minimum diameter of 1/4". Never leave 90° angles. We recommend a radius of more than 1/4" when the kitchen design allows as it makes the countertop firmer.



CLEANING & MAINTENANCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Baking Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Agents, Hydrochloric Acid
Cement	Acid	Hydrochloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydrochloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach


Note: It is recommended that any kind of stain needs to be cleaned immediately, as soon as possible.

TECHNICAL SPECIFICATIONS

CHARACTERISTICS	STANDARD AS PER ISO-13006/2018 En14411 gr.blb	MOTTO VALUE	TEST METHOD
Regulatory Properties			
Deviation in Length & Width	± 0.5%	± 0.2%	ISO 10545-2
Deviation in Thickness	± 5%	± 5%	ISO 10545-2
Straightness of Sides	± 0.5%	± 0.2%	ISO 10545-2
Rectangularity	± 0.5%	± 0.2%	ISO 10545-2
Surface Flatness	± 0.5%	± 0.3%	ISO 10545-2
Colour Difference	ΔE<1.00	ΔE<0.30	ISO 10545-16
Glossiness	As per Mfg.	As Per Mfg.	Gloss Meter
Regulatory Properties			
Water Absorption	≤ 0.5 %	≤ 0.3 %	ISO 10545-3
Apparent Density	As Per Mfg.	>2.20 g/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of Rupture	Min.35N/mm ²	Min.40N/mm ²	ISO 10545-4
Breaking Strength	Min. 1300 N	Min. 5000 N	ISO 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO 10545-4
Surface Mechanical Properties			
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO 10545-7
Mohs Hardness	As per Mfg.	Min. class 4	BS EN 15771
Massive Mechanical Properties			
Frost Resistance	As Per Mfg.	Frost Proof	ISO 10545-12
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Moisture Expansion	Max. 0.6mm/m	Max. 0.02mm/m	ISO 10545-10
Thermal Expansion	Max. 9.0 x 10 ⁻⁶	Max. 6.0x10 ⁻⁶	ISO 10545-8
Chemical Properties			
Chemical Resistance	As Per Mfg.	No Damage	ISO 10545-13
Stain Resistance	Resistant	Resistant	ISO 10545-14
Safety Properties			
Slip Resistance	As per Mfg.	N. A.	DIN 51130
Fire Resistance	As per Mfg.	Fire Proof	N. A.

PACKING DETAILS

Dimension (mm)	No. of Pcs/Box	Square Feet	Weight (Approx)
800x2400mm	1 Pcs.	20.67 Sq. ft	68 kg.

**MOTTO GROUP**

8-A, National Highway, Sartanpar Road, At. Sartanpar,
Ta. Wankaner, Morbi - 363 621, Gujarat, INDIA

Mail. info@mottogroup.in, **Web.** www.mottogroup.in
Toll-free. 1800 123 2124
Call. +91 95123 80072

Scan for Catalogue

