

MOTTO[®]

Tiles & Bathware

THE ART OF STRONG SURFACES

800x3000mm | 800x2400mm

15mm thickness

MOZEKO
COLLECTION

ABOUT US



Motto is one of the most dynamic & productive brands of the modern ceramic world that is brought to life by a visionary person Mr. Mahendra Patel. Over the years the company has developed manifold.

Since 2004 - the inception year, to today we have expanded our reach to national & international arenas with a capillary presence in more than 70+ countries with 2500 satisfied customers.

Finest skills clubbed with state of the art technology have helped us to carve a niche, which is stamped by authorities as we are ISO 9001 : 2018 Certified. Overall the company has marked its position as the leading Manufacturer, Exporter and Supplier of the exquisite Ceramic Porcelain Tiles for Wall &

WRAP SPACES IN THE SUBTLE BEAUTY OF NATURAL PATTERNS

Channeling the spirit of natural harmony, this Collection brings together the pleasing details of elements, earthy tones, and the allure of modern surfaces in each slab, creating a sublime experience. These fullbody slabs are ideal for creating spaces that balance the strength and refined aesthetics that create spaces that evoke a peaceful vibe.

6
COLORS_

MOZEKO
COLLECTION




HARMONY



TUSCAN




MOSS

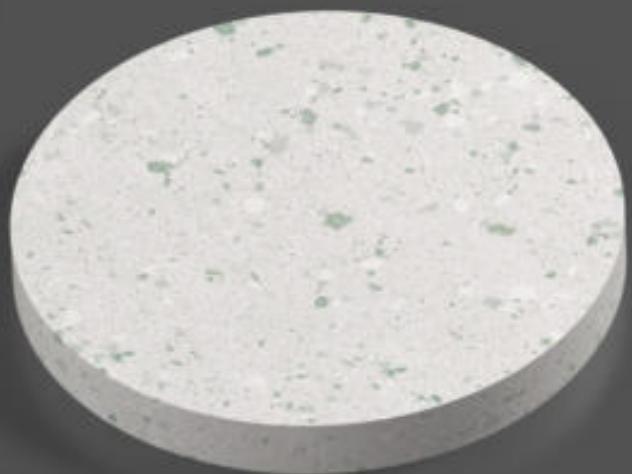

ICE




IRON

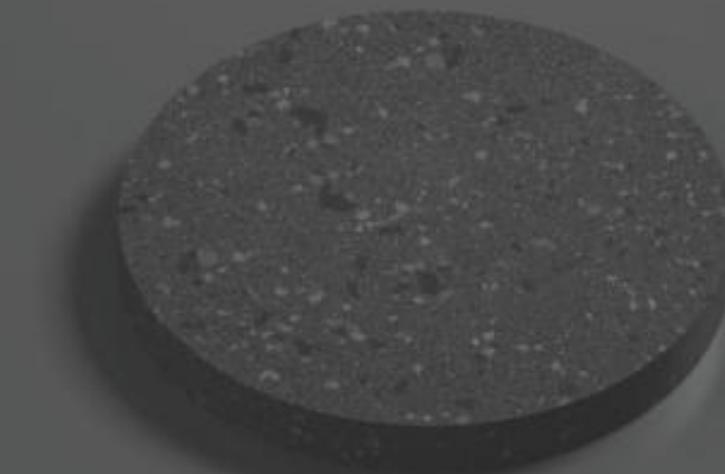

MIDNIGHT





1. 800x3000mm
2. 800x2400mm

The Mozeco Collection features Glossy and Digimatt surfaces that cater to the diverse needs of our customers. Available in the sizes 800x3000mm and 800x2400mm, these slabs create sophisticated, open, and welcoming spaces with graceful aesthetics.

GLOSSY
SURFACE

DIGIMATT
SURFACE



IMBIBE SPACES WITH THE
ROBUST STRENGTH FOR
AESTHETIC BEAUTY THAT
ECHOS THROUGH GENERATIONS.

2 SIZE_
SURFACE_

FULL BODY
SERIES



SLABS THAT ADD AN ACCENT OF CLASS TO SPACES


EDGE PROFILES



Squared ridge at 45°



Rounded ridge at 45°



Straight squared ridge


JOINT POSSIBILITIES



Bird's beak



45° corner



Soft corner



Rounded straight ridge



Double straight squared ridge



Double straight rounded ridge

Let the creativity flow with and enhance any space with a touch of refinement and elegance. The 15mm thickness of these slabs offers numerous edge profiles that help create smooth corners and edges for an elevated look.

APPLICATION AREA

Given their unique size, thickness, and design, these slabs offer a variety of applications in residential, commercial, and public spaces. These fullbody slabs offer robust strength that ensures durability and their surfaces are created with the latest technology offering easy maintenance and minimal upkeep. Explore possibilities with these slabs and create spaces with calming natural beauty.




COUNTER TOP

Create counter tops that make an impact with these slabs for an easy-to-maintain and ultra-modern look.



AIRPORT

Enhance public spaces like airports that see high foot traffic with slabs that offer resistance to wear and tear with elegant aesthetics.

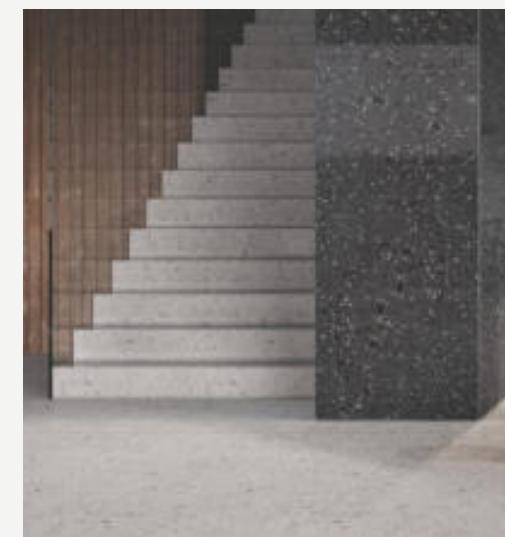


STAIR-CASE

Create the steps to your haven with surfaces that offer smooth aesthetics with a variety of edge profiles for ultimate elegance.

OFFICE FLOOR

Elevate office floors with slabs that complement any decor while offering easy maintenance, creating spaces that inspire.

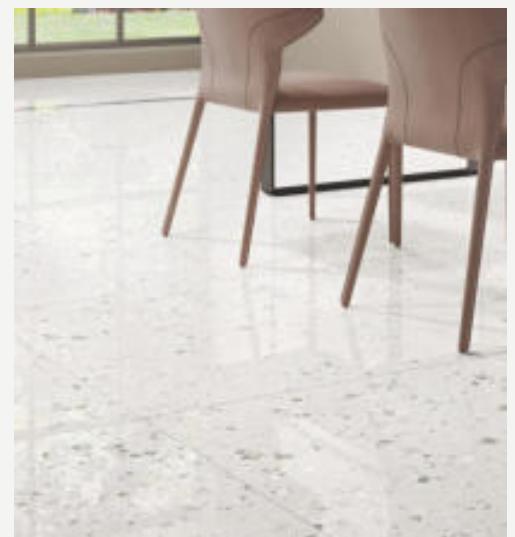


WINDOW FRAME

Relax in the perfect nook beside windows with slabs that are resistant to elements and temperature fluctuations.



PUBLIC SEATING

Elevate public seatings with these slabs for a clean look that is resistant to wear and tear and facilitates easy maintenance.



1. 800x3000mm
2. 800x2400mm

Mozeco Ice



Mozeco Ice

Sizes:
1. 800x3000mm
2. 800x2400mm

Thickness:
15mm

Body:
Fullbody

Surfaces:
Glossy
Digimatt



1.



2.



SCAN FOR
VIRTUAL
360°



Mozeco Iron



Mozeco Iron

Sizes:
1. 800x3000mm
2. 800x2400mm

Thickness:
15mm

Body:
Fullbody


Surfaces:
Glossy
Digimatt



1.



2.

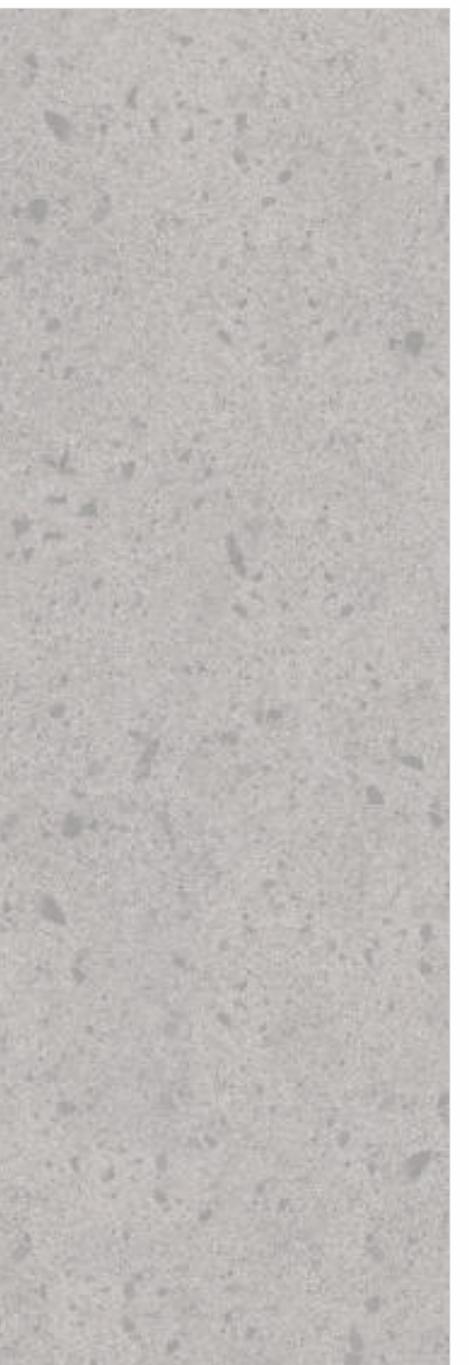

SCAN FOR
VIRTUAL
360°



Mozeco Midnight



Mozeco Midnight

Sizes:
1. 800x3000mm
2. 800x2400mm

Thickness:
15mm

Body:
Fullbody


Surfaces:
Glossy
Digimatt



1.



2.

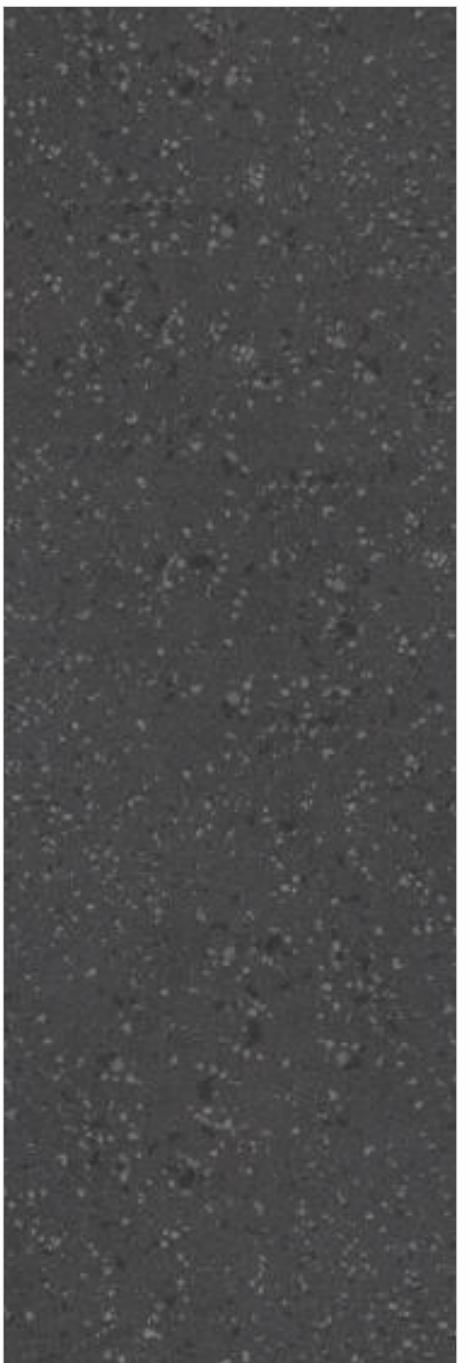

SCAN FOR
VIRTUAL
360°



Mozeco Harmony



Mozeco Harmony

Sizes:
1. 800x3000mm
2. 800x2400mm

Thickness:
15mm

Body:
Fullbody

Surfaces:
Glossy
Digimatt



1.



2.



SCAN FOR
VIRTUAL
360°



Mozeco Tuskan



Mozeco Tuskan

Sizes:
1. 800x3000mm
2. 800x2400mm

Thickness:
15mm

Body:
Fullbody

Surfaces:
Glossy
Digimatt



1.



2.



SCAN FOR
VIRTUAL
360°



Mozeco Moss



Mozeco Moss

Sizes:
1. 800x3000mm
2. 800x2400mm

Thickness:
15mm

Body:
Fullbody

Surfaces:
Glossy
Digimatt



1.



2.





SCAN FOR
VIRTUAL
360°




MANUALLY TRANSPORTING SLAB

Only for 1/4" Slabs

MOVING A SLAB

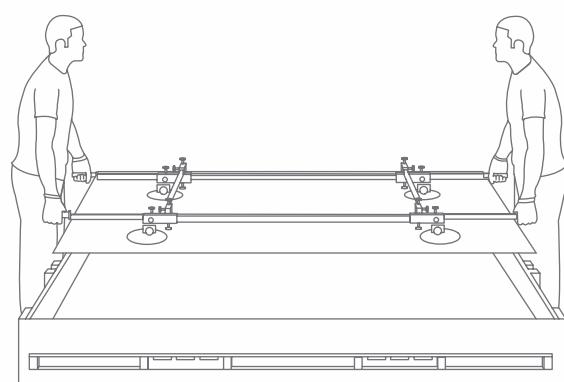
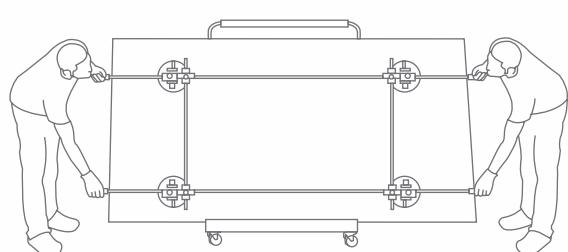


WATCH
INSTALLATION
PROCESS





WORKING WITH THE VARIOUS VERSIONS OF SLAB

CUTTING WITH DIAMOND DISCS

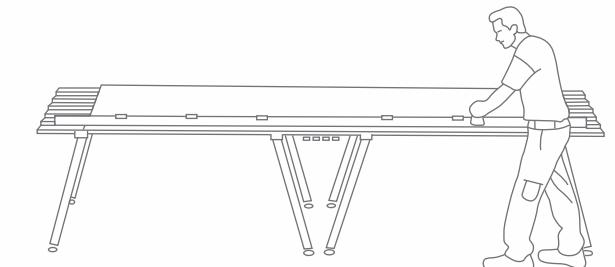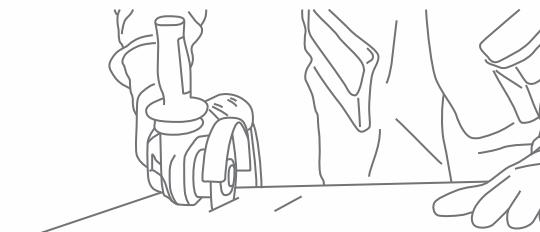

Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of Disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). It may be required to cool the disc with water. Recommended discs are the thin types generally used for cutting porcelain stoneware. The surface should be kept on a FLAT base while cutting without any gap underneath.



RAISING A IMMODERATE SLAB ONTO A BENCH

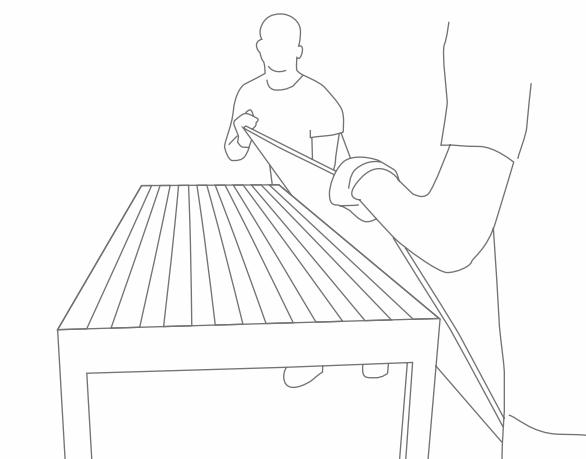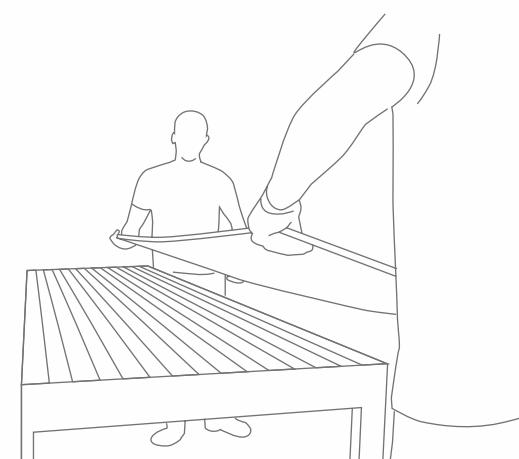

✗ INCORRECT

✓ CORRECT

HANDLING IMMODERATE SLAB FOR WALL

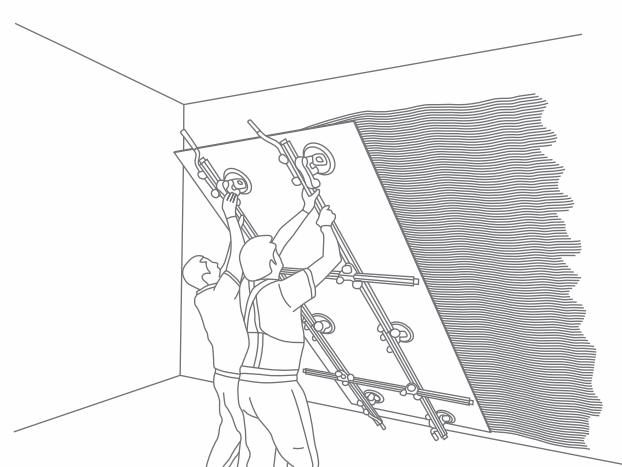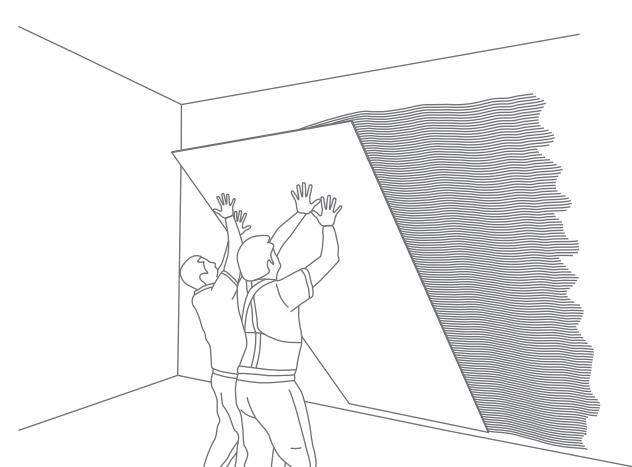



✗ INCORRECT

✓ CORRECT

WATCH
INSTALLATION
PROCESS




DRILLING

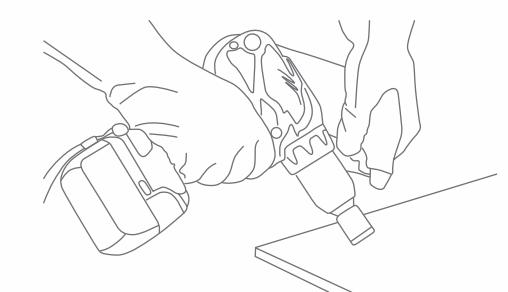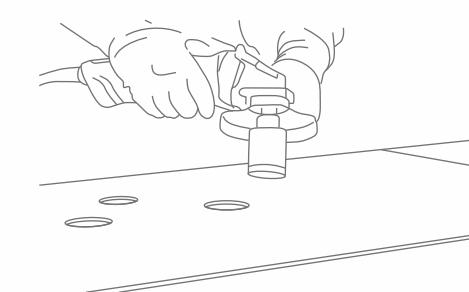

You can use cutting discs fitted to battery-operated screwdrivers or angle grinders, or electrical drills as an alternative.

INTERNAL CUT/L-SHAPED CUT



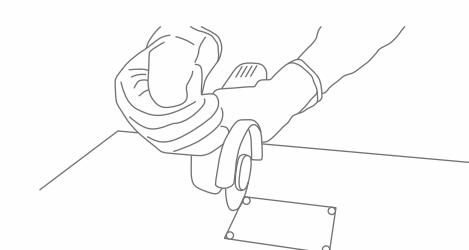


To get internal and L-shaped corners & to reduce the risk of breakage, cut 'o' at the vertex of the internal corners using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs, and more follow the instructions provided below:

When using these tools:

- Cool the point being drilled with water
- Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on
- If you are using tungsten bits, start drilling at a low speed
- If you are using drills or screwdrivers, do not select hammering mode


EDGE-FINISHING

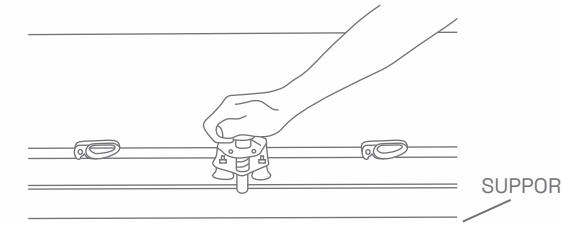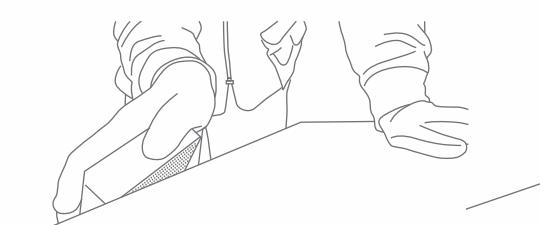


SUPPORT

INSTRUCTIONS FOR MANUAL INSTALLATION


SINGLE LAYER METHOD



DOUBLE-LAYER METHOD



COMPRESSING THE SLAB



IMPORTANT

All cutout corners must have a minimum diameter of 1/4". Never leave 90° angles. We recommend a radius of more than 1/4" when the kitchen design allows as it makes the countertop firmer.



✓ CORRECT

✗ INCORRECT

✗ INCORRECT

✗ INCORRECT

CLEANING & MAINTENANCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

| TYPE OF STAIN | CHEMICAL PRODUCT | EXAMPLE |
|---------------|--------------------|--|
| Grease | Alkaline - Solvent | Detergent |
| Oil | Solvent | Ammonia, Baking Soda |
| Ink | Oxidant - Solvent | Alcohol, Liquid Bleach, Nail Paint Remover |
| Rust | Acid | Hydrochloric Acid, Vinegar, Red Harpic |
| Lime | Acid | Descaling Agents, Hydrochloric Acid |
| Cement | Acid | Hydrochloric Acid |
| Wine | Alkaline | Ammonia, Liquid Bleach |
| Coffee | Alkaline - Solvent | Ammonia, Liquid Bleach |
| Rubber | Solvent | Alcohol, Thinner |
| Plaster | Acid | Hydrochloric Acid |
| Candle Wax | Solvent | Alcohol, Thinner |
| Iodine | Oxidant | Liquid Bleach |
| Blood | Oxidant | Liquid Bleach |
| Ice Cream | Alkaline | Liquid Bleach |

Note: It is recommended that any kind of stain needs to be cleaned immediately, as soon as possible.

TECHNICAL SPECIFICATIONS

| CHARACTERISTICS | STANDARD AS PER ISO-13006/2018 En14411 gr.blb | MOTTO VALUE | TEST METHOD |
|--------------------------------------|---|---------------------------|--------------|
| Regulatory Properties | | | |
| Deviation in Length & Width | ± 0.5% | ± 0.2% | ISO 10545-2 |
| Deviation in Thickness | ± 5% | ± 5% | ISO 10545-2 |
| Straightness of Sides | ± 0.5% | ± 0.2% | ISO 10545-2 |
| Rectangularity | ± 0.5% | ± 0.2% | ISO 10545-2 |
| Surface Flatness | ± 0.5% | ± 0.3% | ISO 10545-2 |
| Colour Difference | ΔE<1.00 | ΔE<0.30 | ISO 10545-16 |
| Glossiness | As per Mfg. | As Per Mfg. | Gloss Meter |
| Regulatory Properties | | | |
| Water Absorption | ≤ 0.5 % | ≤ 0.03 % | ISO 10545-3 |
| Apparent Density | As Per Mfg. | >2.20 g/cc | ISO 10545-3 |
| Massive Mechanical Properties | | | |
| Modulus of Rupture | Min.35N/mm ² | Min.40N/mm ² | ISO 10545-4 |
| Breaking Strength | Min. 1300 N | Min. 7000 N | ISO 10545-4 |
| Impact Resistance | As per Mfg. | Min. 0.55 | ISO 10545-4 |
| Surface Mechanical Properties | | | |
| Surface Abrasion Resistance | As per Mfg. | Min. class 3 | ISO 10545-7 |
| Mohs Hardness | As per Mfg. | Min. class 4 | BS EN 15771 |
| Massive Mechanical Properties | | | |
| Frost Resistance | As Per Mfg. | Frost Proof | ISO 10545-12 |
| Thermal Shock Resistance | Min. 10 Cycle | Min. 10 Cycle | ISO 10545-9 |
| Moisture Expansion | Max. 0.6mm/m | Max. 0.02mm/m | ISO 10545-10 |
| Thermal Expansion | Max. 9.0 x 10 ⁻⁶ | Max. 6.0x10 ⁻⁶ | ISO 10545-8 |
| Chemical Properties | | | |
| Chemical Resistance | As Per Mfg. | No Damage | ISO 10545-13 |
| Stain Resistance | Resistant | Resistant | ISO 10545-14 |
| Safety Properties | | | |
| Slip Resistance | As per Mfg. | N. A. | DIN 51130 |
| Fire Resistance | As per Mfg. | Fire Proof | N. A. |

PACKING DETAILS

| Dimension (mm) | No. of Pcs/Box | Square Feet | Weight (Approx) |
|----------------|----------------|--------------|-----------------|
| 800x3000mm | 1 Pcs. | 25.83 Sq. ft | 83 kg. |
| 800x2400mm | 1 Pcs. | 20.67 Sq. ft | 68 kg. |



MOTTO GROUP
8-A, National Highway, Sartanpar Road, At. Sartanpar,
Ta. Wankaner, Morbi - 363 621, Gujarat, INDIA

Mail. info@mottogroup.in, Web. www.mottogroup.in
Toll-free. 1800 123 2124
Call. +91 95123 80072