

DYNAMIC AND DURABLE



FULLBODY
SERIES



800x1600mm

9mm Thickness

EXPLORE THE


NEW AGE CERAMICS

UNLEASH THE POTENTIAL OF MAGNIFICENCE

Experience a collection that crosses the boundaries of inspiration and adds barrels of elegance to your space. A collection that brings life to your space and balances practicality and fineness. The natural hues set the palette of wonder and adorn the beauty of every individual arena. The collection adds a transformative regal and furbishes the outlook with a modern yet innate impression. The rawness of the slabs blends with the simplicity of its appeal and captures the beholders.

Let simplicity embark on your abode and captivate the beauty of raw elements in its finest forms.

TRANSFORM YOUR SPACE INTO A
HUB OF ENDLESS ELEGANCE

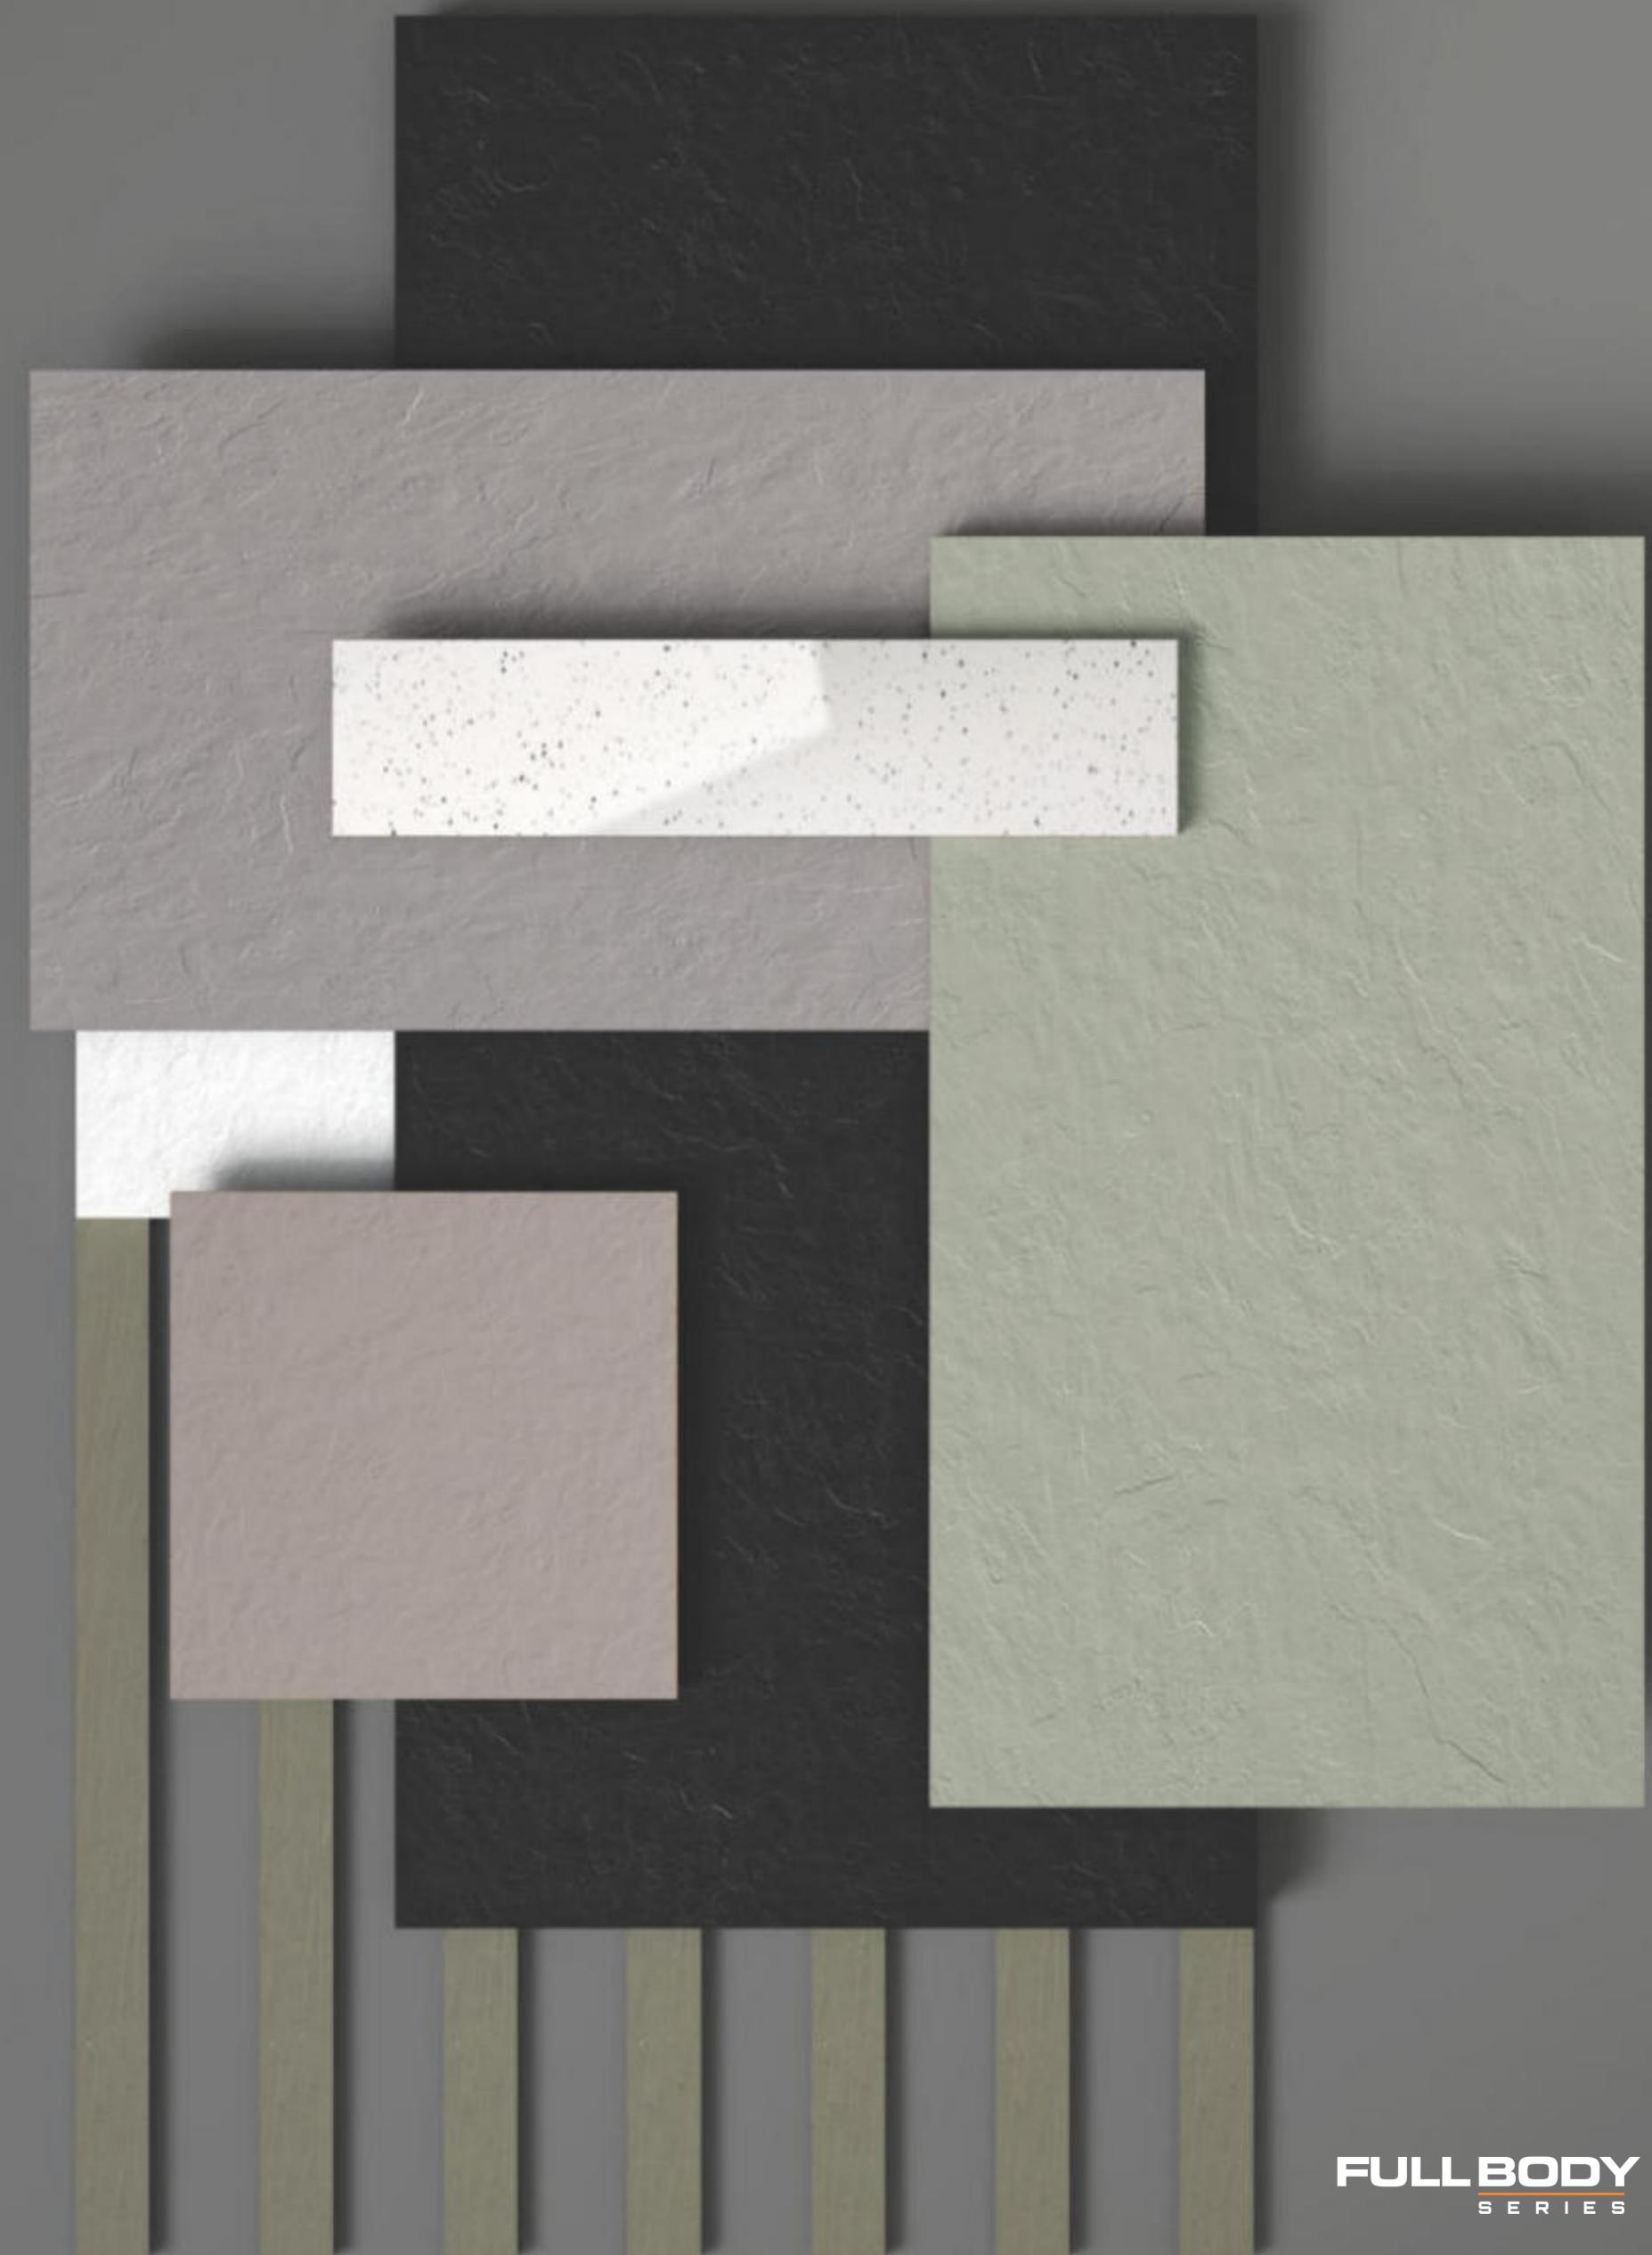

Italian Technology

FLEXIBLE BODY

FULL BODY
SERIES

SHIELDING SURFACES IN EVERY EDGE

Witness every surface showcasing an outgrowth of opulence with raw designs that articulate a vision of richness. The terrestrial shades add a luxuriously calm emotion to your space.

Let the coarse textures unveil their magic on you and escalate yourself to a peaceful paradise with this collection.

EDGE PROFILES

Tile edge profiles add a sleek finish, enhancing both aesthetics and safety. These profiles offer functionality and style, ensuring a stunning look for any space.



Squared ridge at 45°



Rounded ridge at 45°



Straight squared ridge



Rounded straight ridge



Double straight squared ridge



Double straight rounded ridge


Joint Possibilities



Birds Beak


45° Corner

Soft Corner

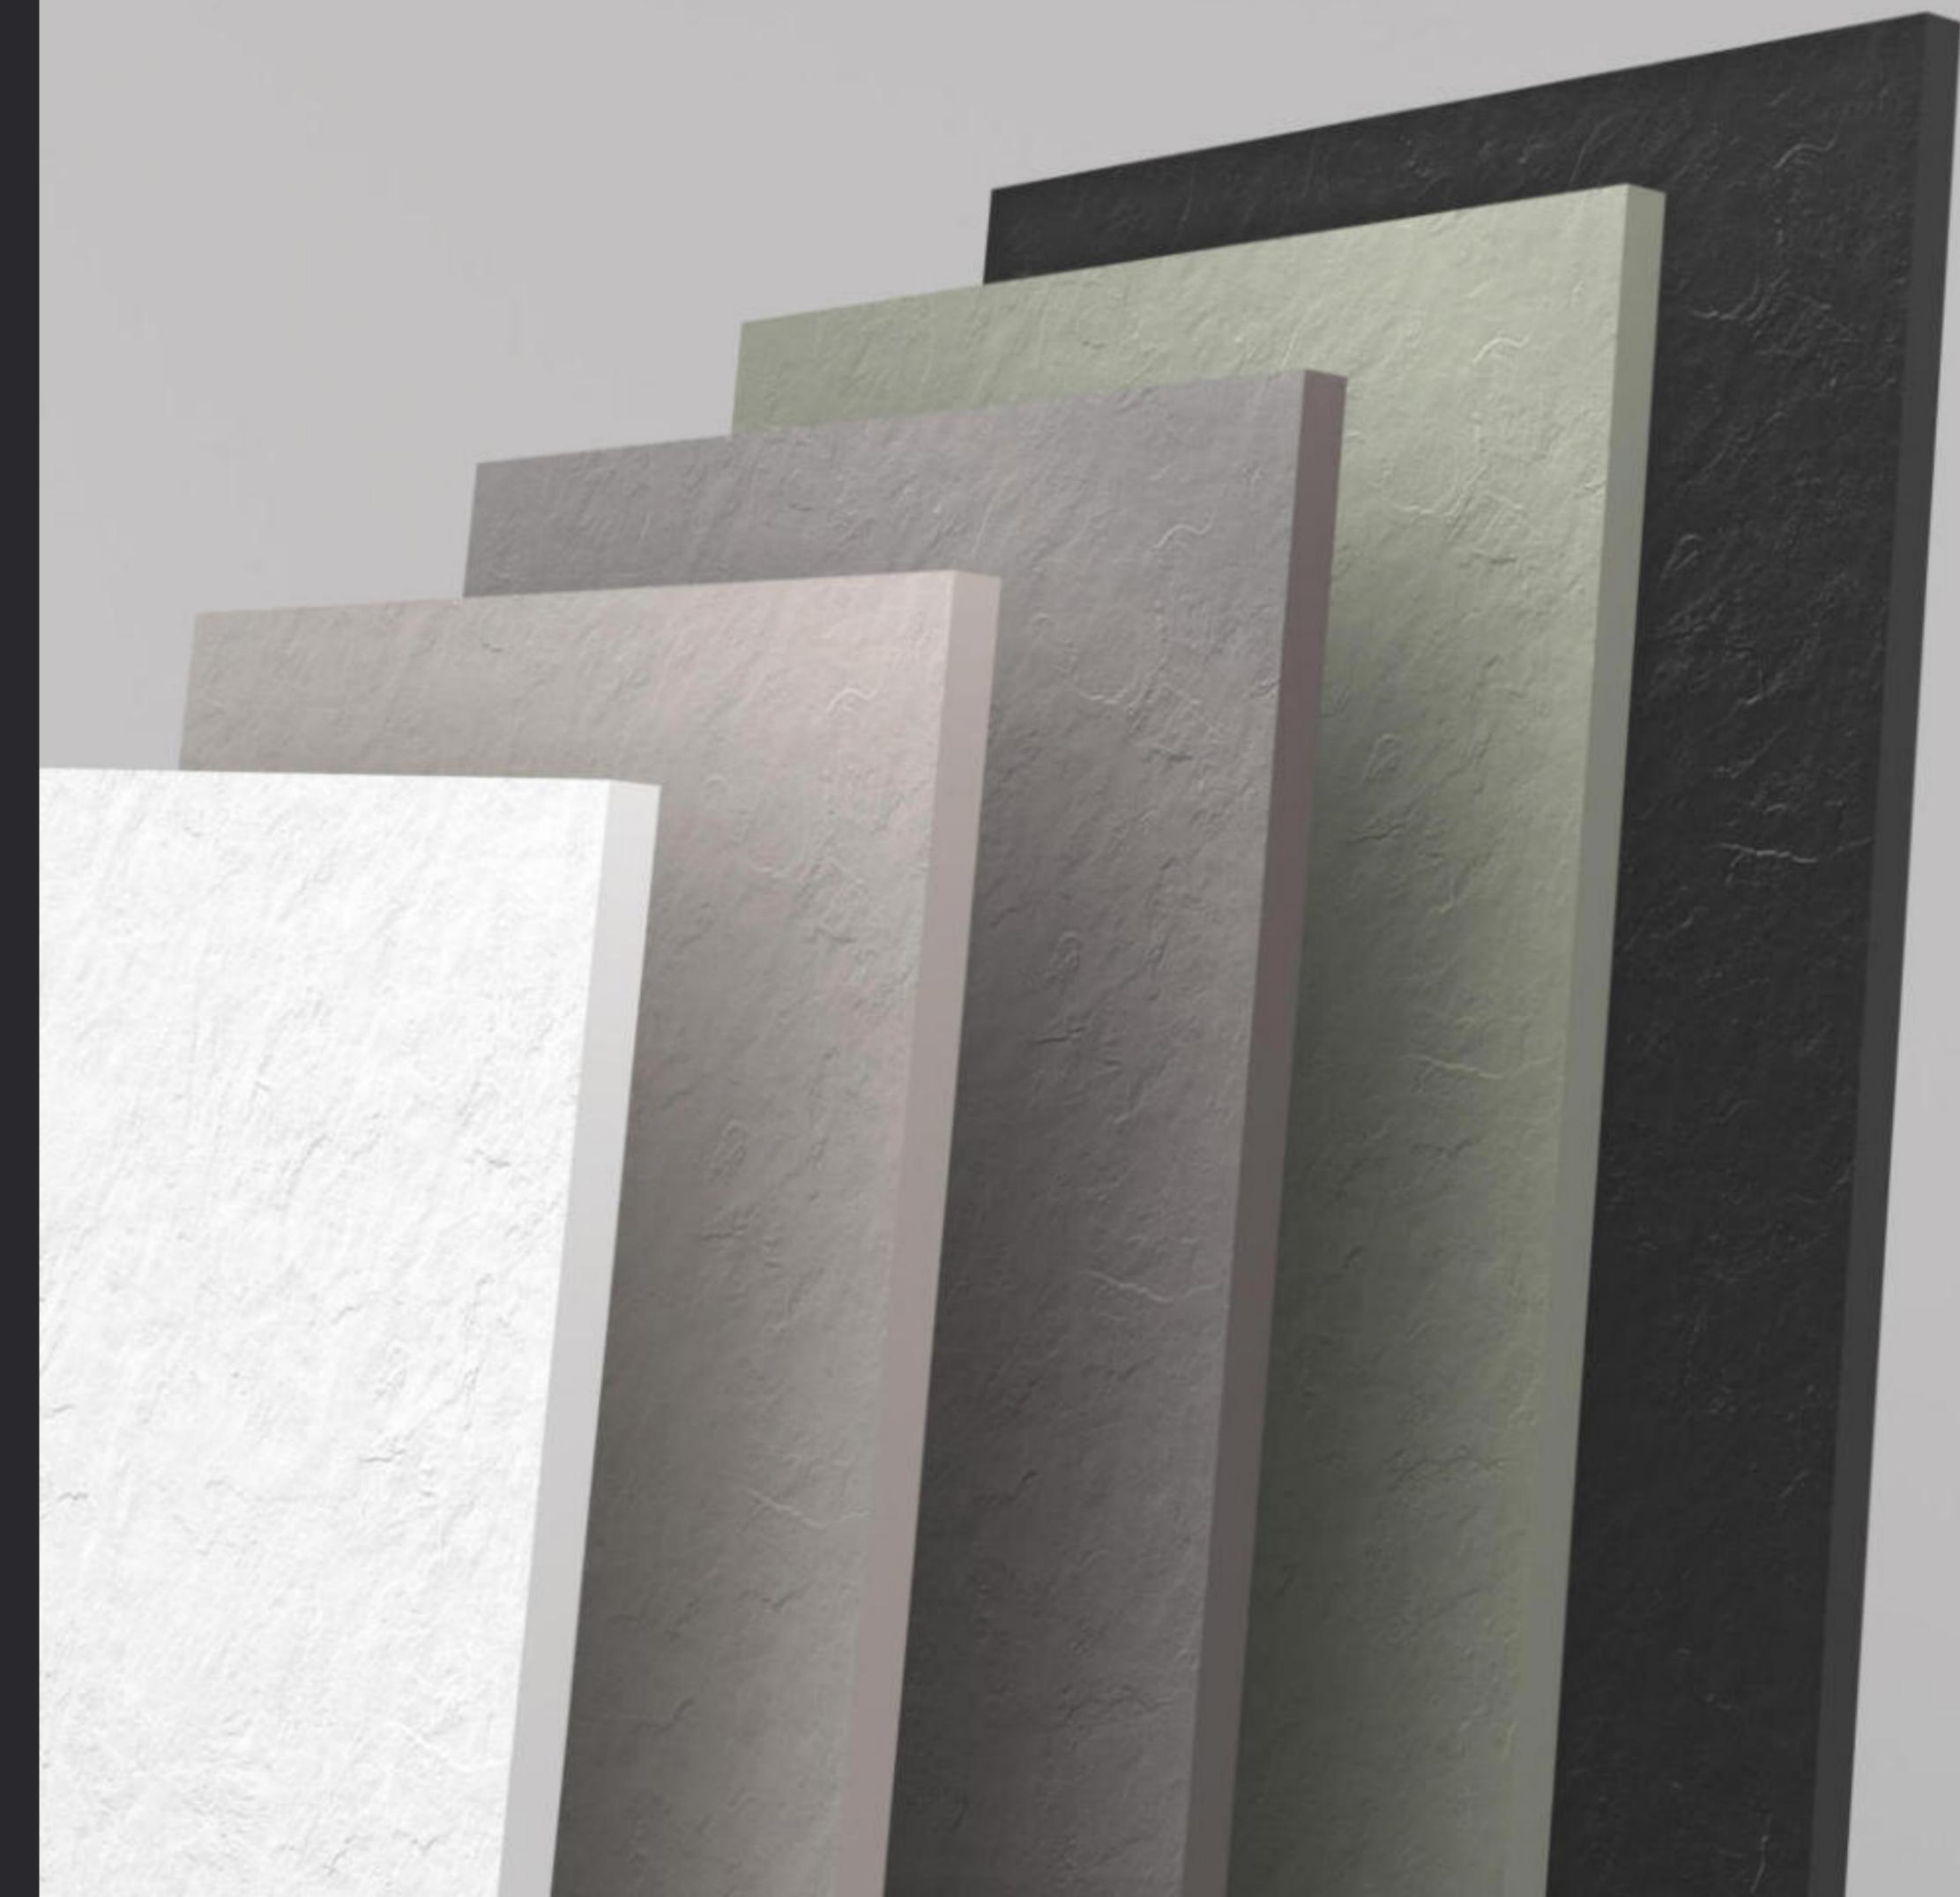

EARTHY

FINISH & TEXTURE

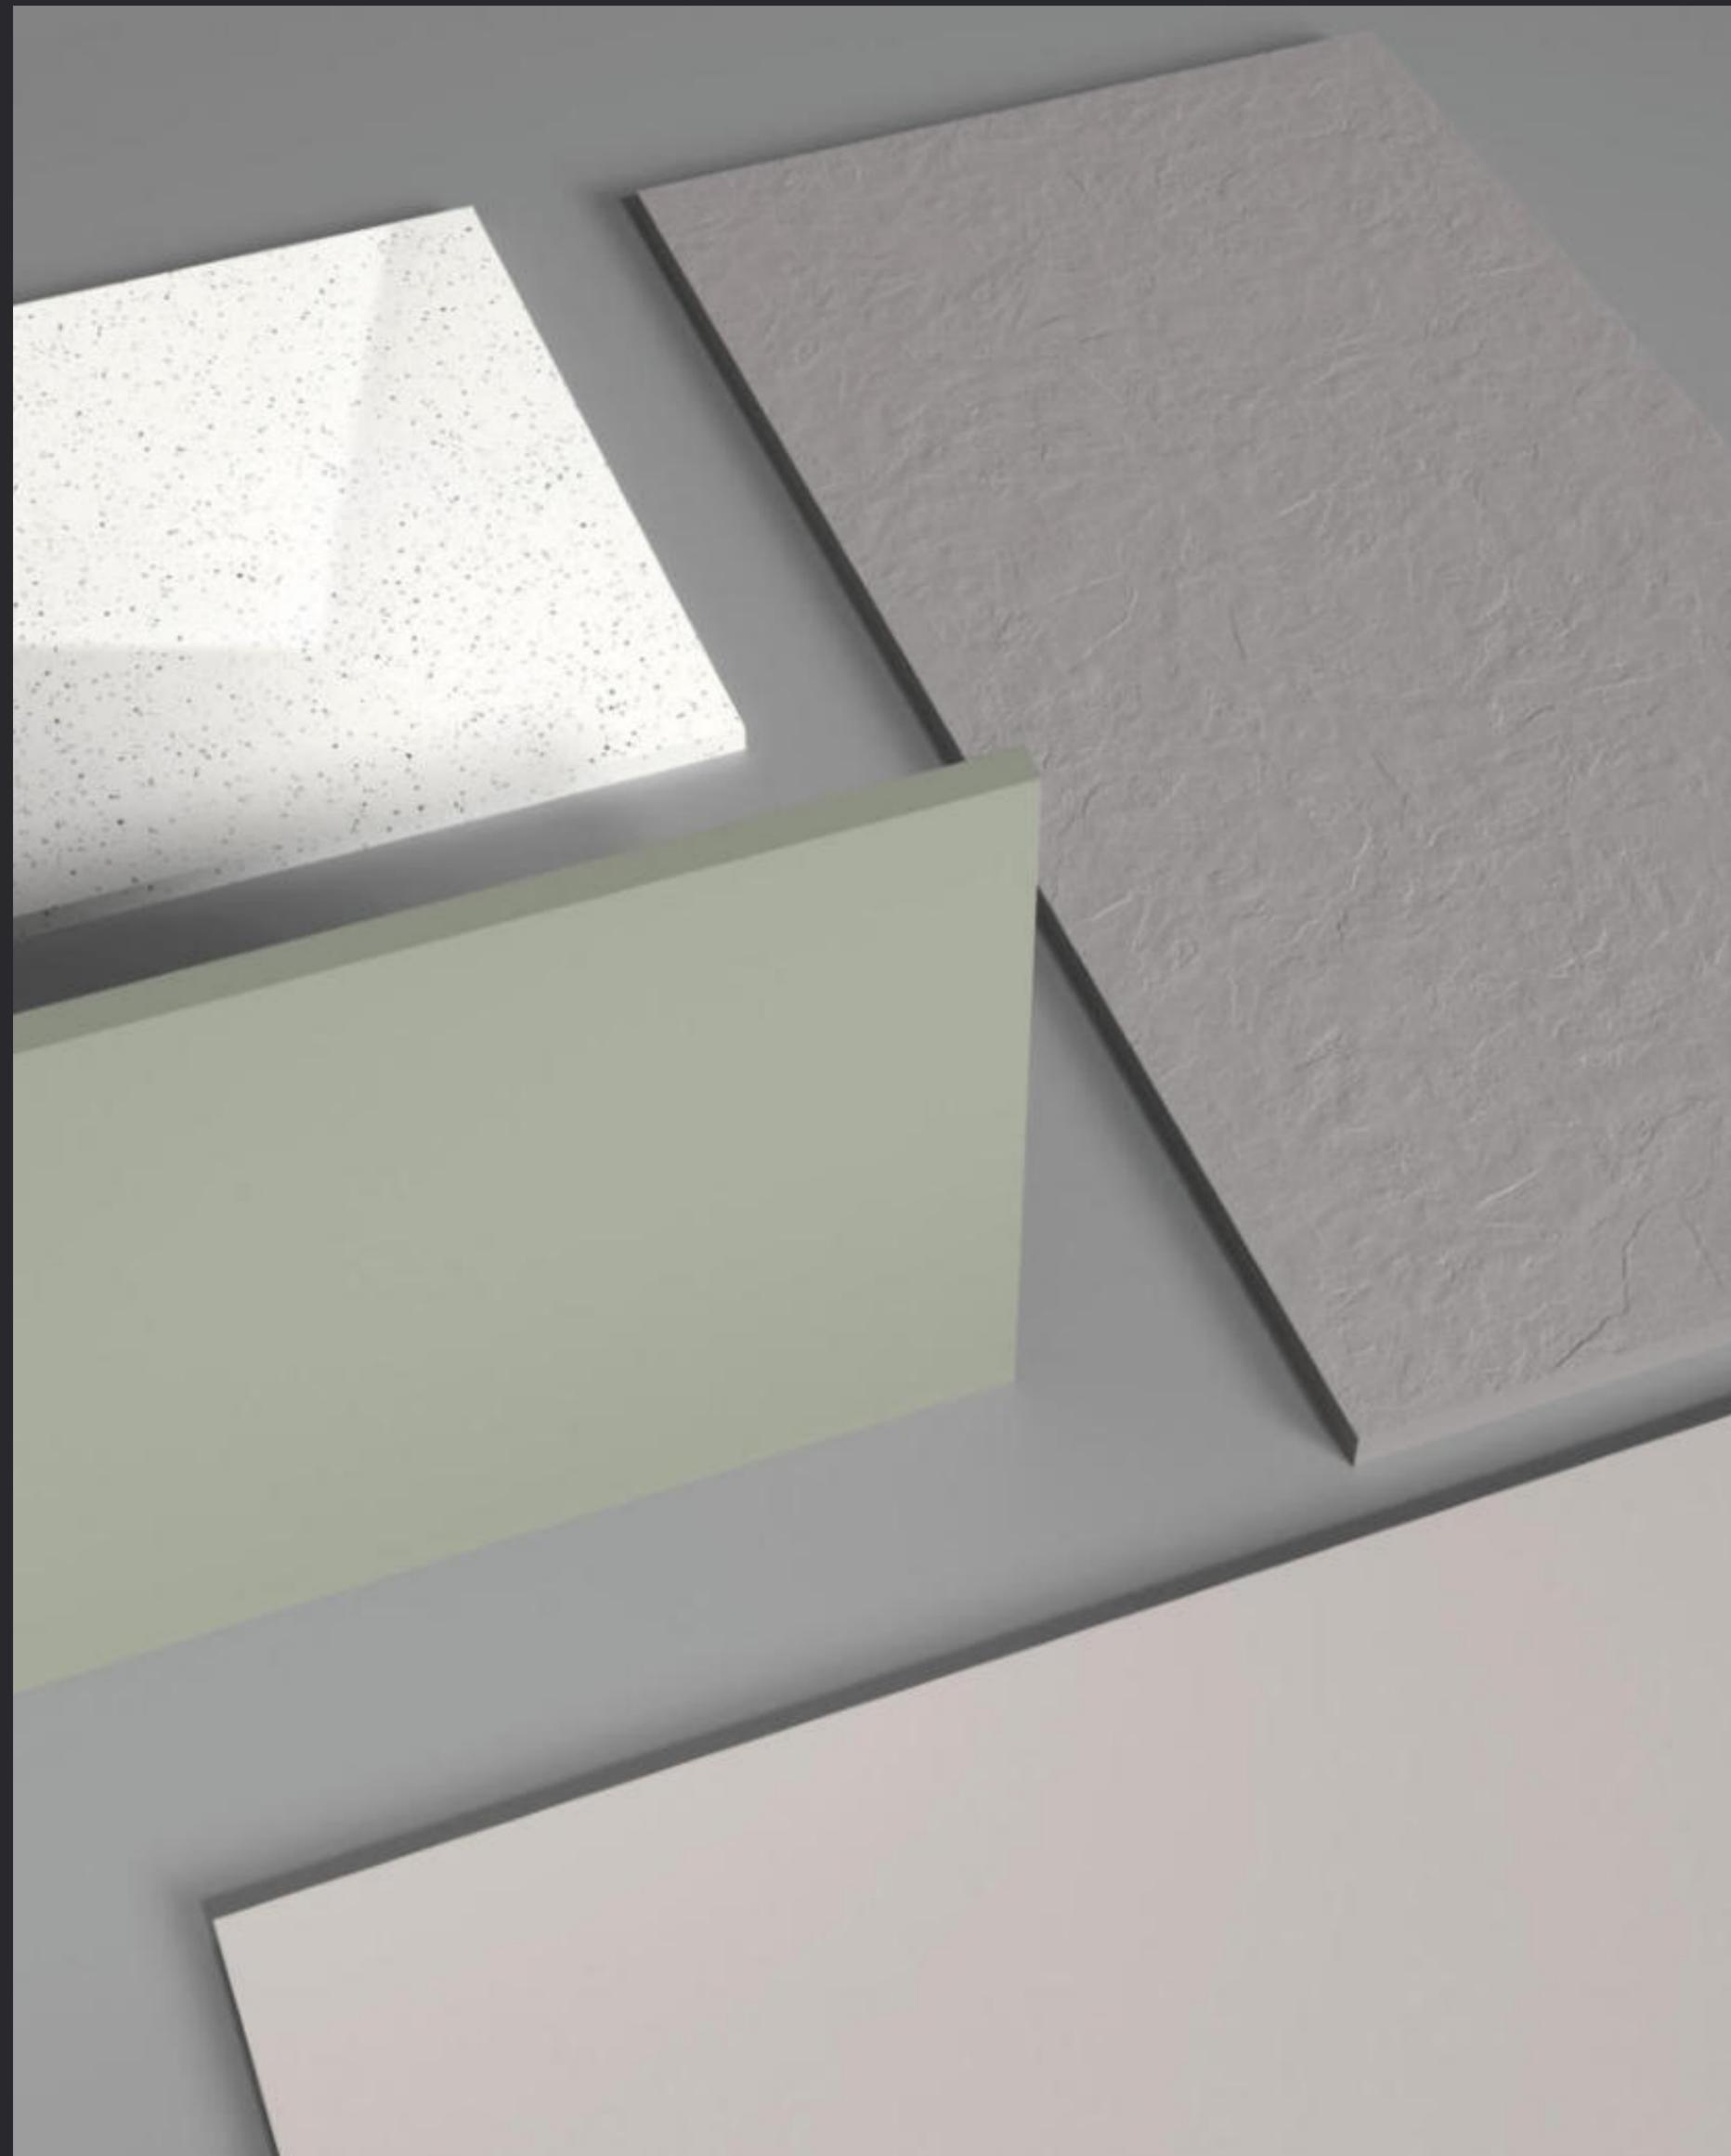


FULL BODY
SERIES

Italian Technology

DISTINGUISHING

FEATURES & THICKNESS

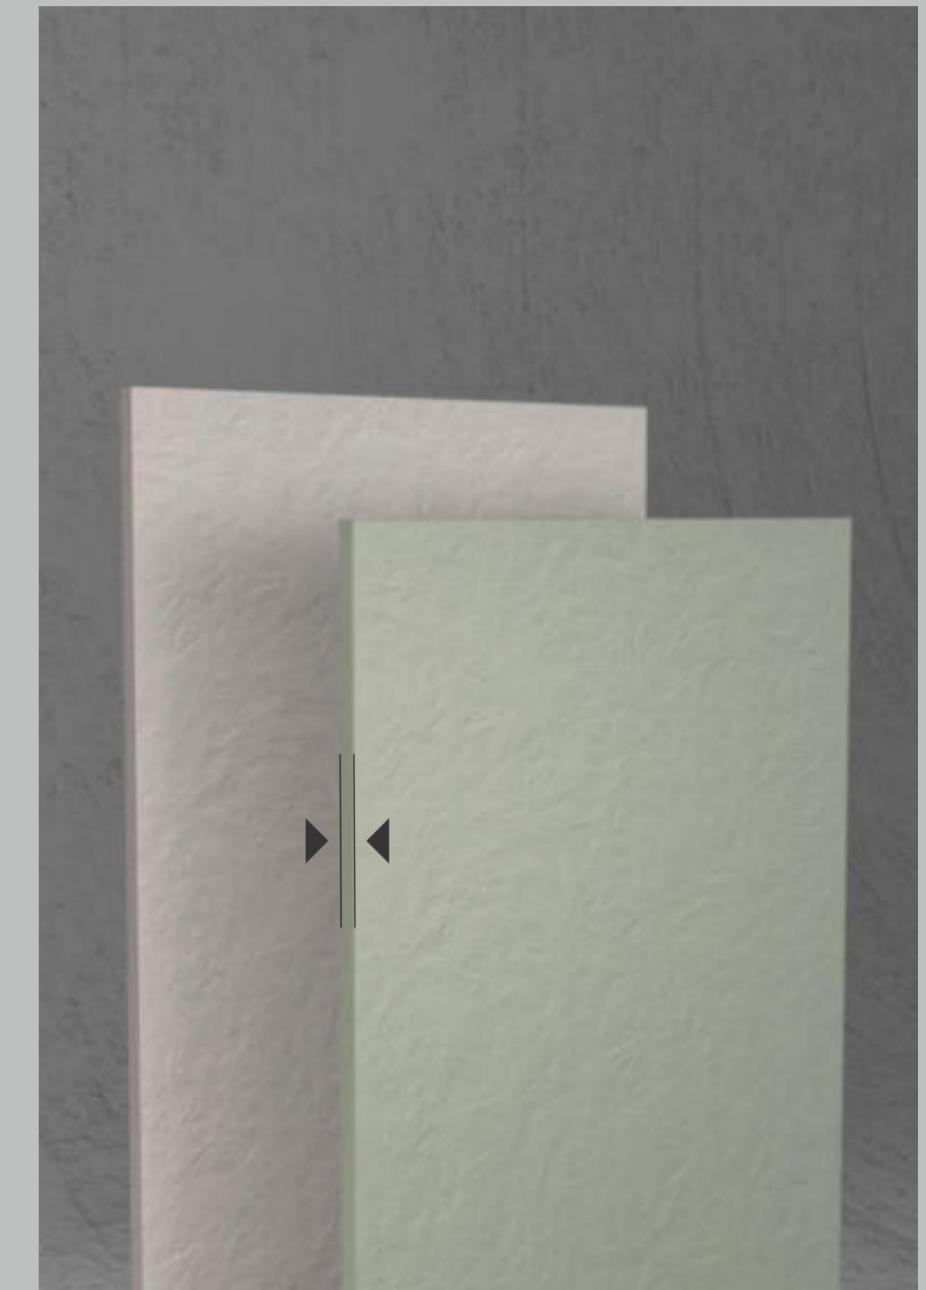

9mm Thickness

Re-elevate your space with masterpieces of distinguishing features. Look into the artistry of raw and earth dynamics that set you off with its practicality.



High Resilience

The surfaces are resilient to stains, scratches, impacts, and more.



Antibacterial Surface

Non-porous surfaces boost anti-microbial properties, making them hygienic.



Sustainable

The practices at Motto are designed green to promote sustainability.



Made in India

The products of Motto are proudly Made in India and available worldwide.



Heat & Weather-Resistant

The robust surfaces stay unaffected by heat and harsh weather conditions.



Recyclable

Made thoughtfully, the surfaces are recyclable, generating less waste.



Floor

Light Grey (Matt)


Wall

Light Grey (Matt) & Light Grey -6 (Rustic Matt)




Light Grey


Light Grey
Finish : Matt

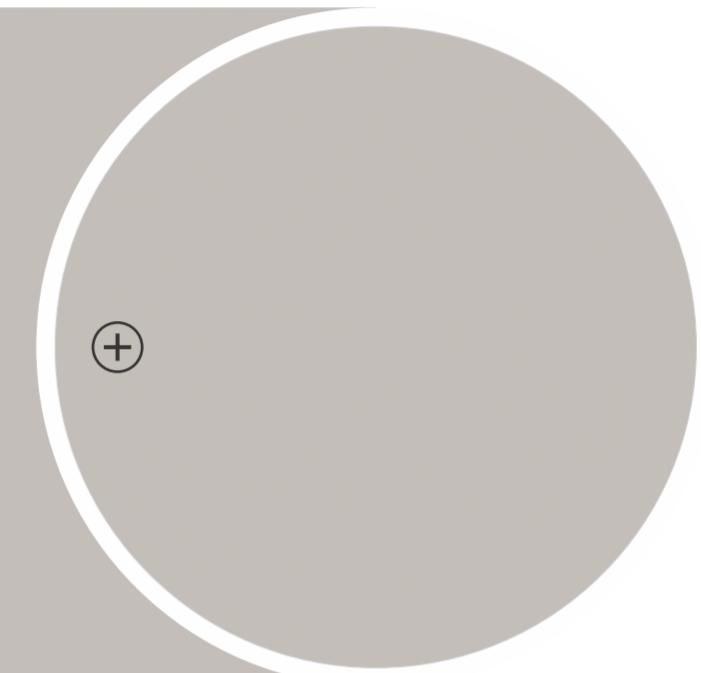

Light Grey - 6
Finish : Rustic Matt

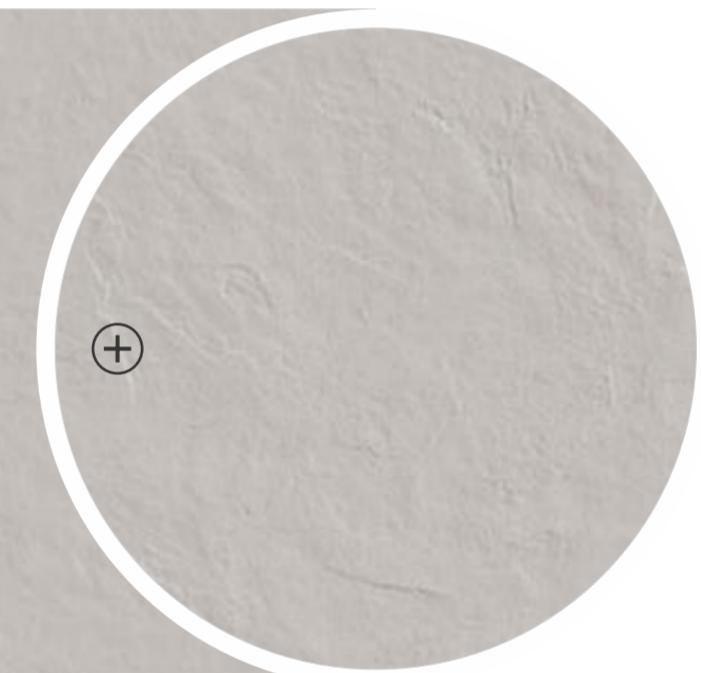

Light Grey - 6
Finish : Lappato Matt

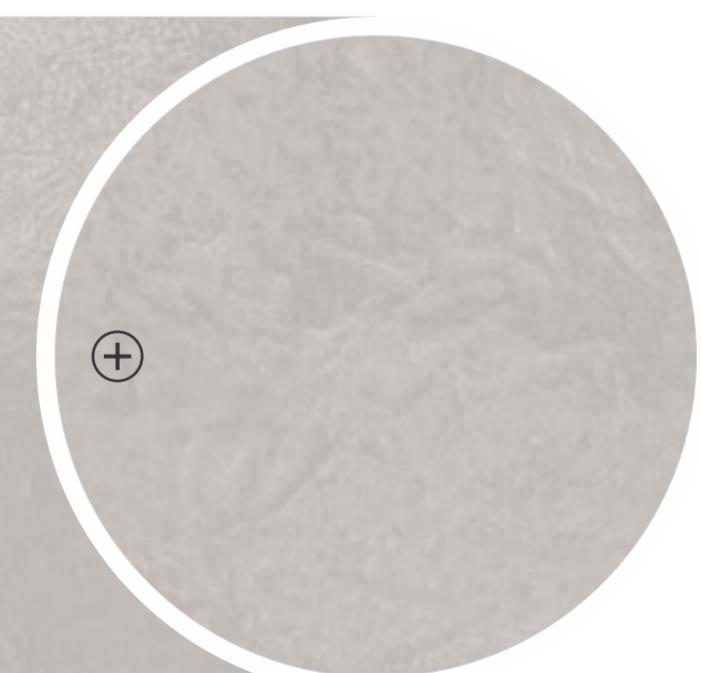

Wall
Light Grey (Matt) & Light Grey -6 (Rustic Matt)

Size
800x1600mm

Thickness
9mm

Body
Full Body




Floor

Dark Grey (Matt)

Wall


Dark Grey -6 (Rustic Matt)

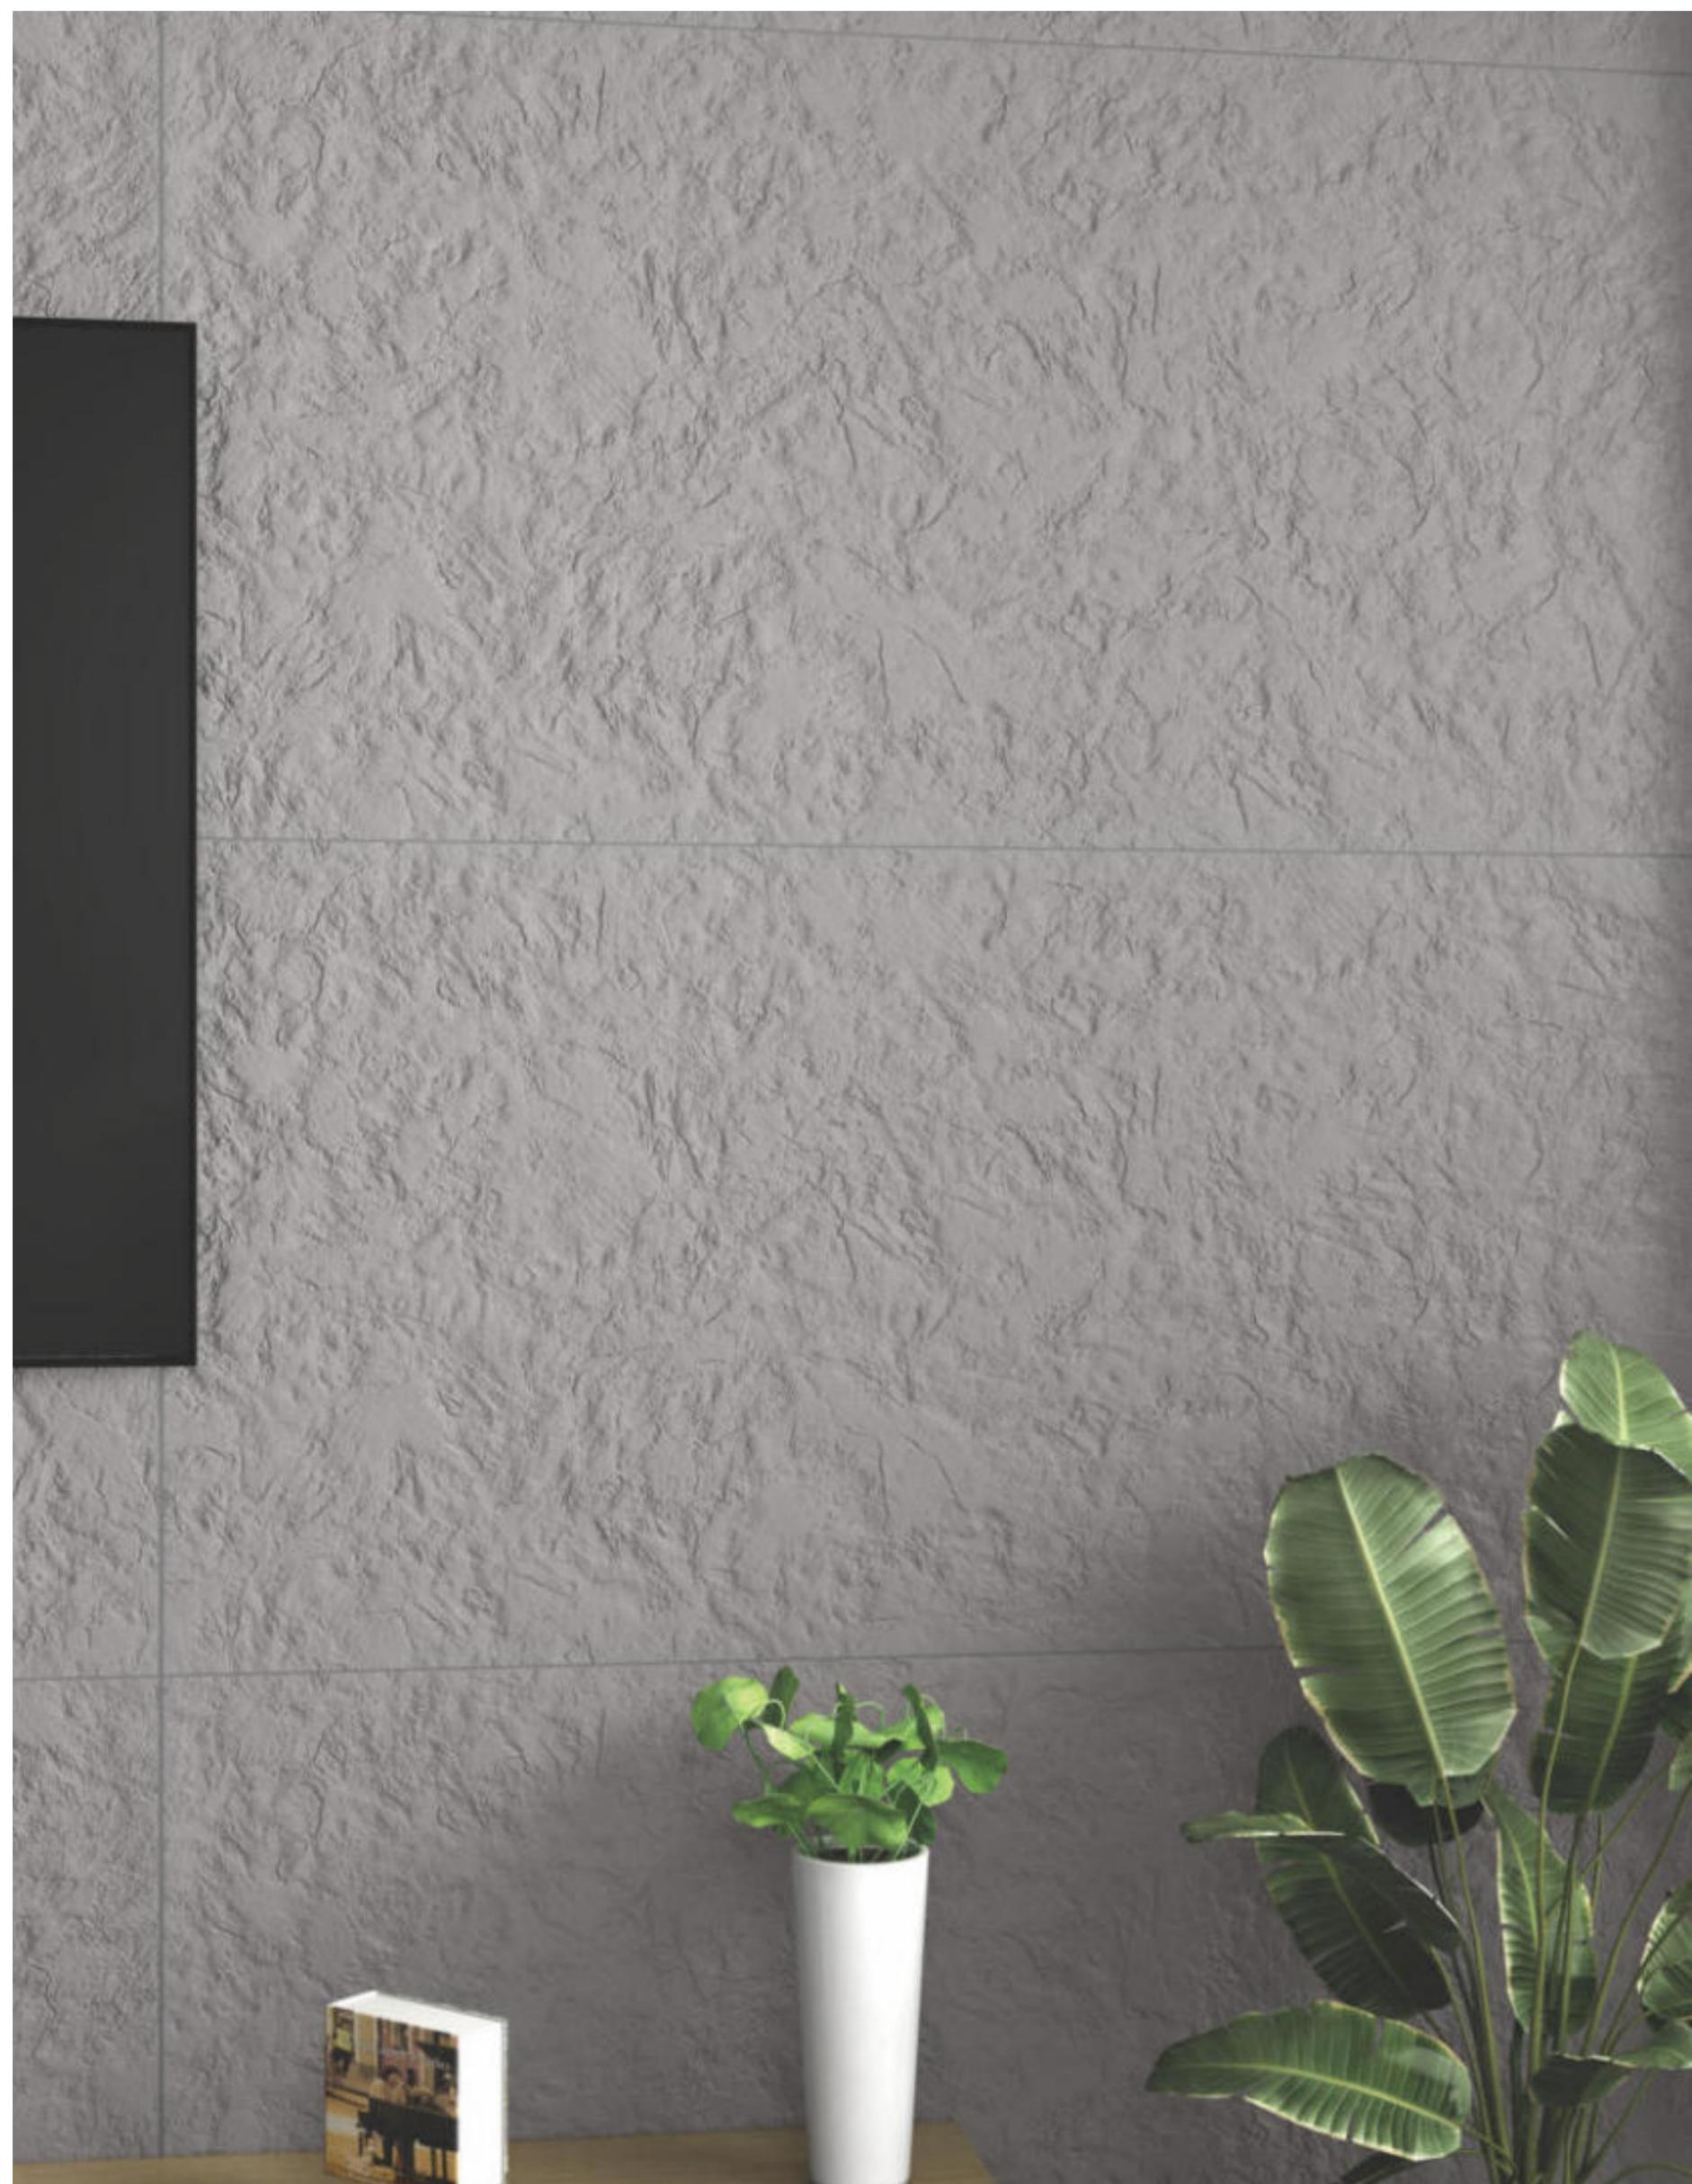


Wall
Dark Grey -6 (Rustic Matt)

Dark Grey


Dark Grey
Finish : Matt

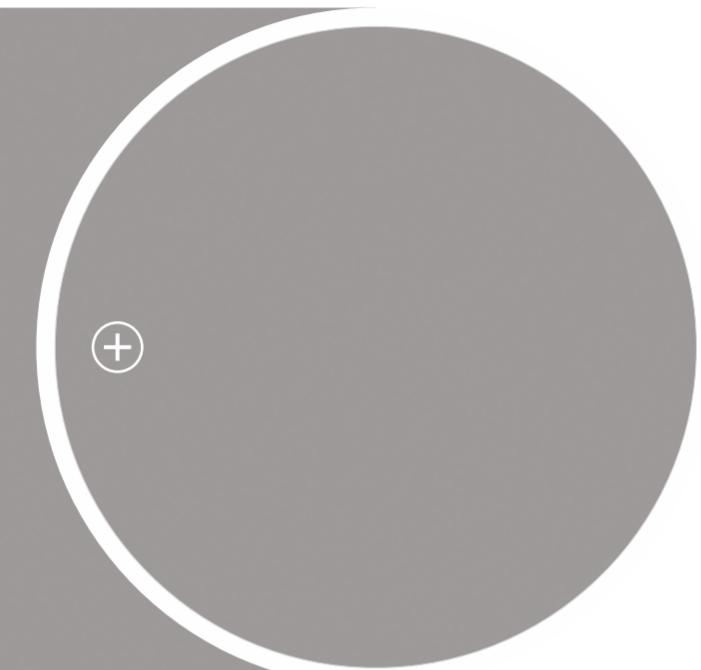

Dark Grey - 6
Finish : Rustic Matt

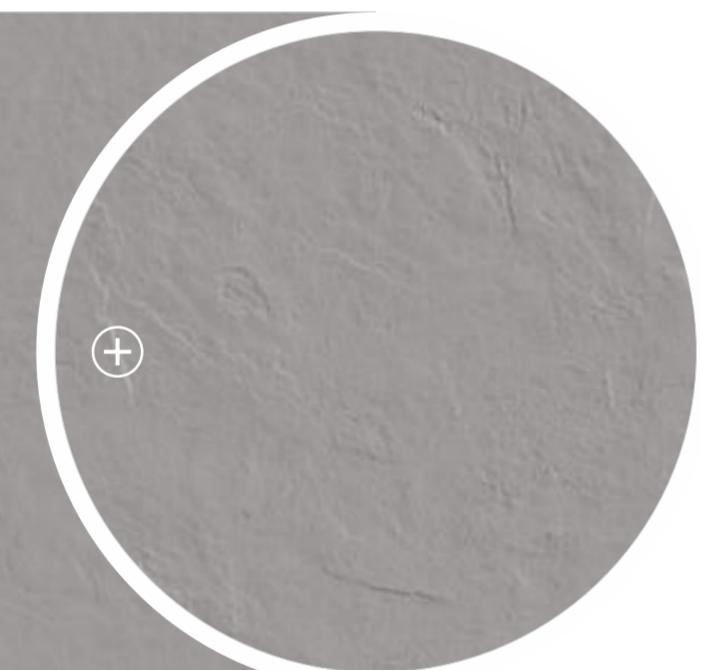

Dark Grey - 6
Finish : Lappato Matt

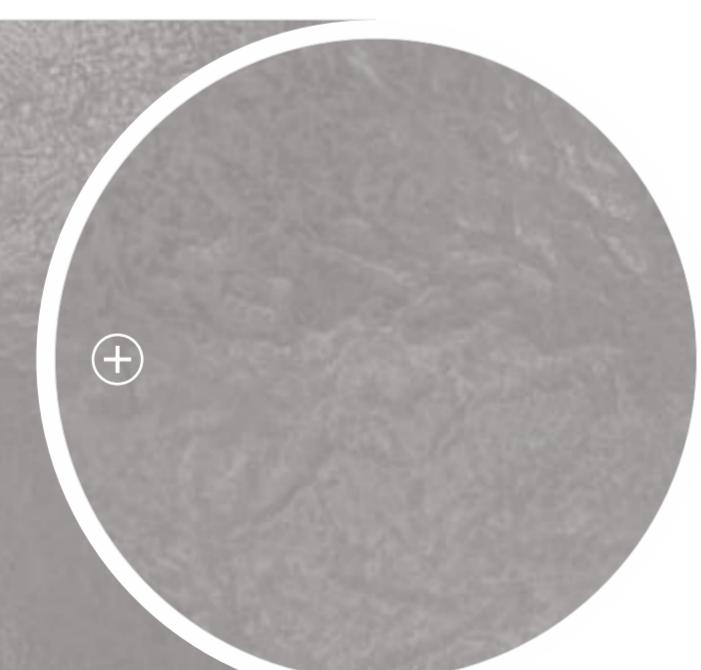

Size **800x1600mm** Thickness **9mm** Body **Full Body**




Floor Wall
Kota (Matt) **Kota - 6** (Lappato Matt)




Floor Wall
Kota (Matt) **Kota - 6** (Lappato Matt)

Kota


Kota
Finish : Matt

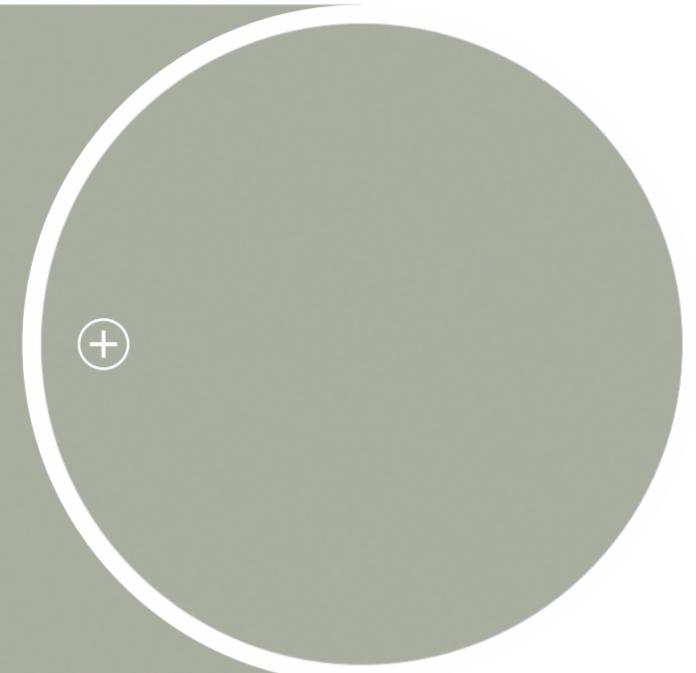

Kota - 6
Finish : Rustic Matt

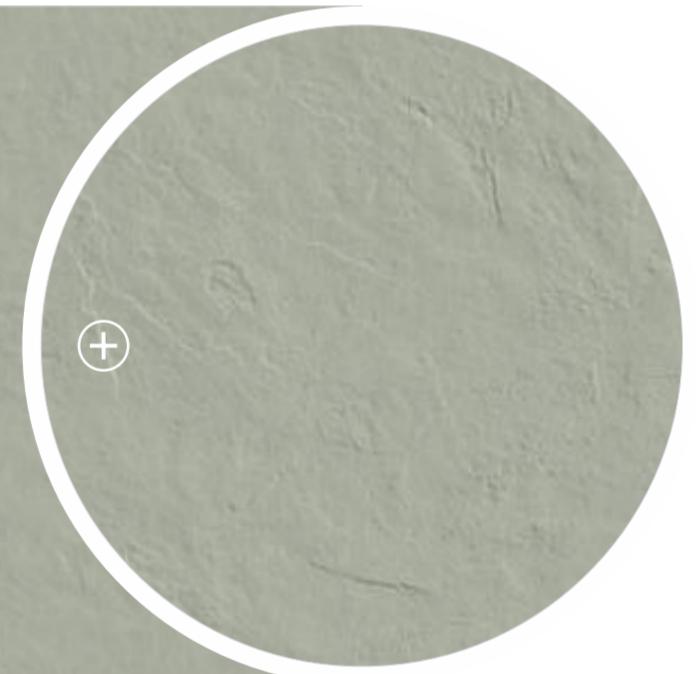

Kota - 6
Finish : Lappato Matt

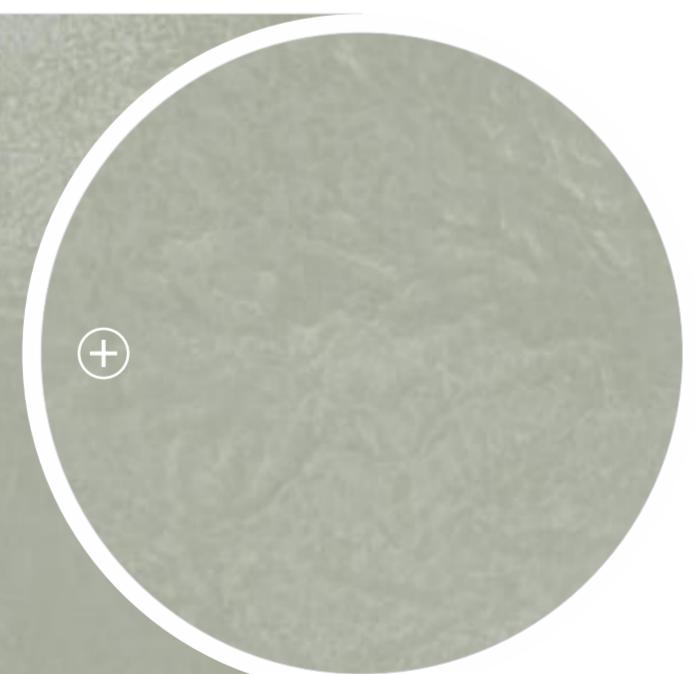



Floor	Wall
White (Matt)	White (Matt) & White -6 (Lappato Matt)




Wall
White -6 (Lappato Matt)

Size **800x1600mm** Thickness **9mm** Body **Full Body**

White


White
Finish : Matt

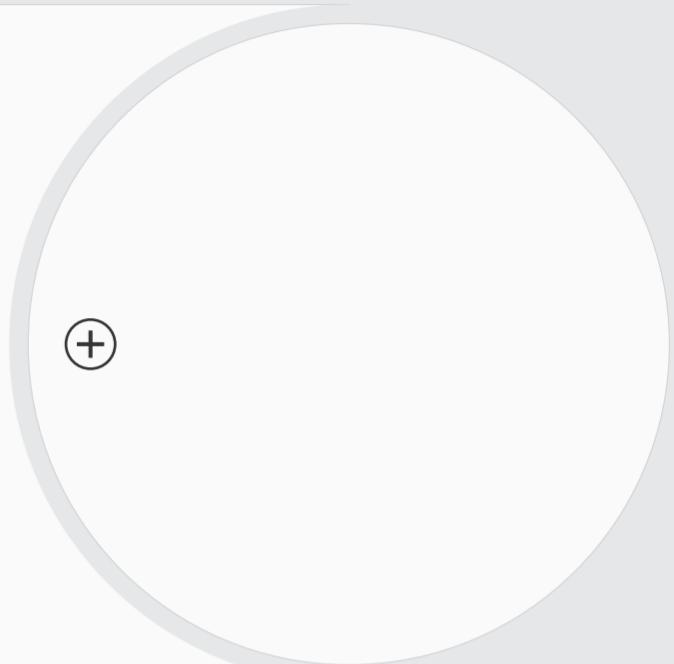

White - 6
Finish : Rustic Matt



White - 6
Finish : Lappato Matt

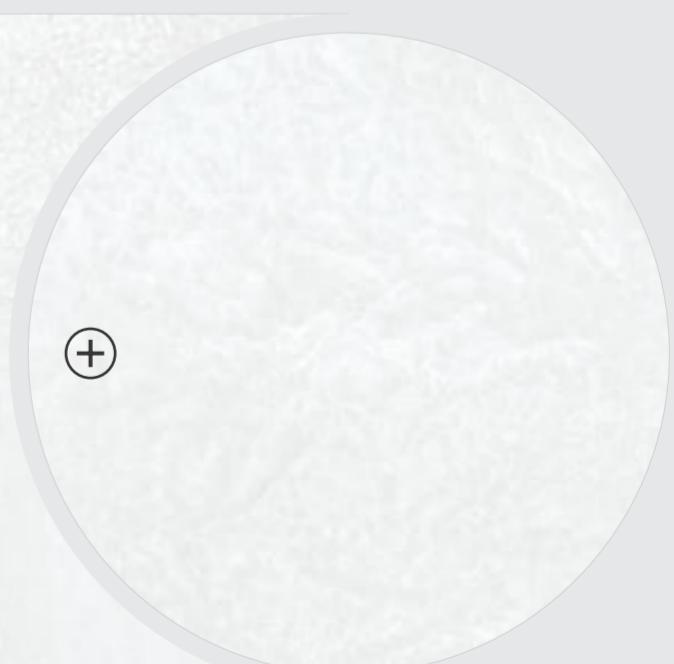



Floor
Black (Matt)

Wall

Black -6 (Rustic Matt)




Wall
Black -6 (Rustic Matt)


Size **800x1600mm** Thickness **9mm** Body **Full Body**

Black


Black
Finish : Matt

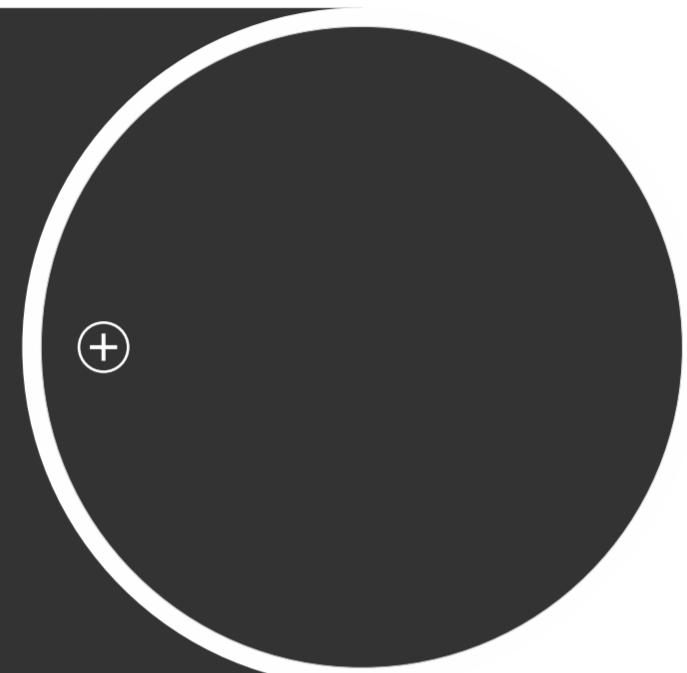

Black - 6
Finish : Rustic Matt

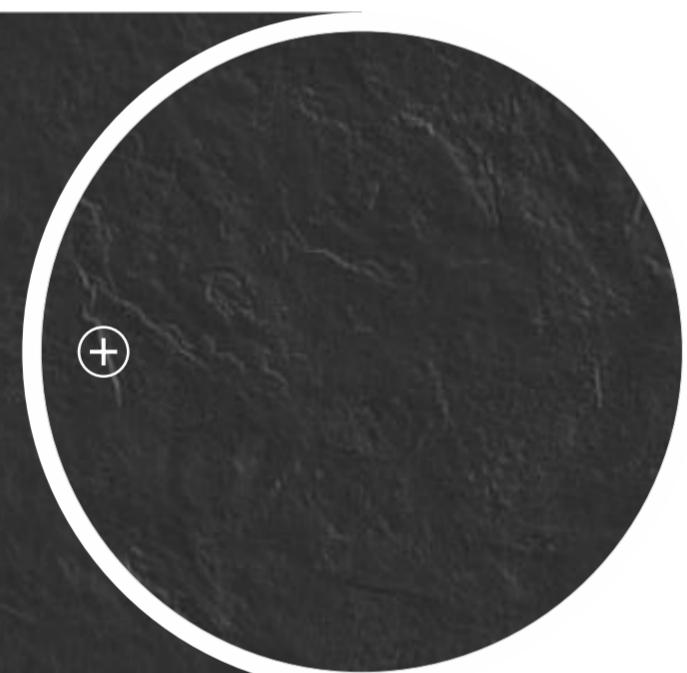

Black - 6
Finish : Lappato Matt

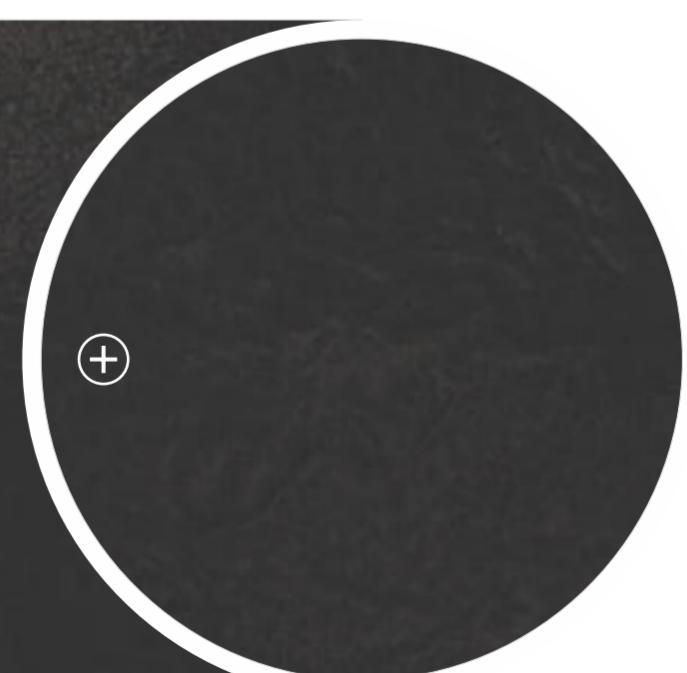



Floor

Galaxy White (Glossy)

Wall

Galaxy White (Glossy)




Floor
Royal Quartz (Glossy)

Wall
Royal Quartz (Glossy)

Snow White, Galaxy White & Royal Quartz

Snow White
Finish : Glossy

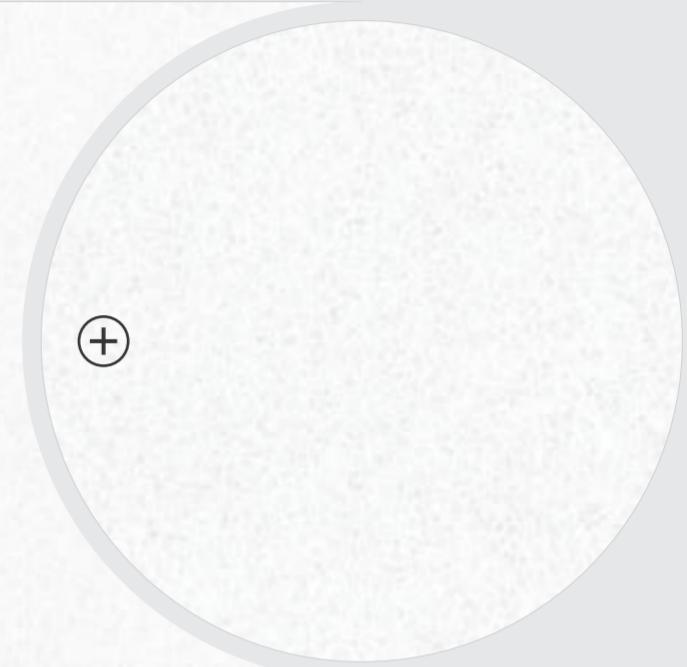

Galaxy White
Finish : Glossy



Royal Quartz
Finish : Glossy



Size **800x1600mm** Thickness **9mm** Body **Full Body**



Floor

Snow White (Glossy)



Wall

Snow White (Glossy)



MANUALLY TRANSPORTING SLAB

Only for 1/4" Slabs

MOVING A SLAB

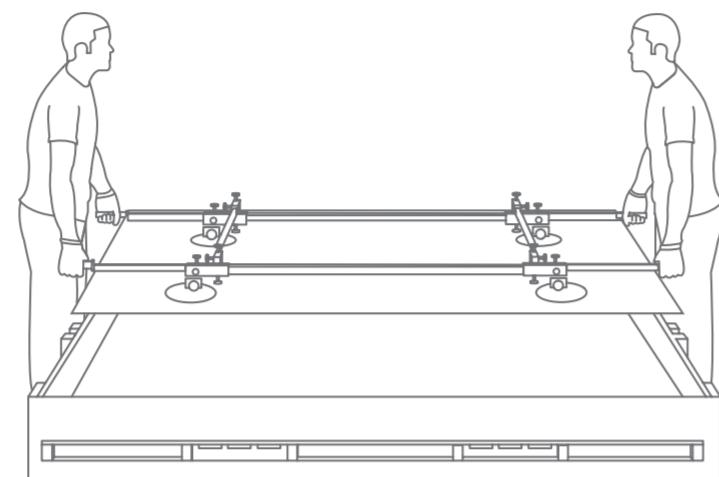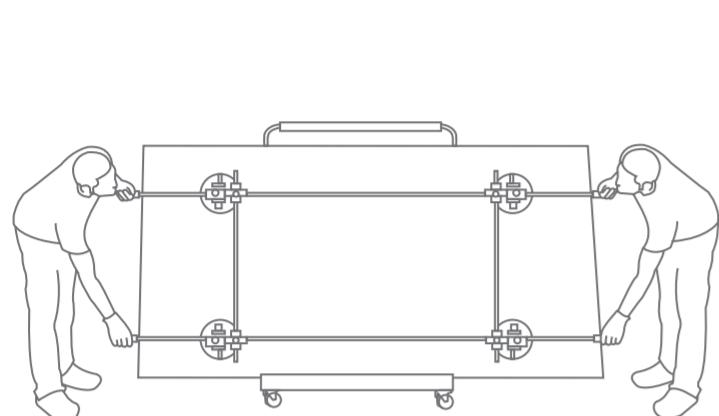



RAISING A IMMODERATE SLAB ONTO A BENCH

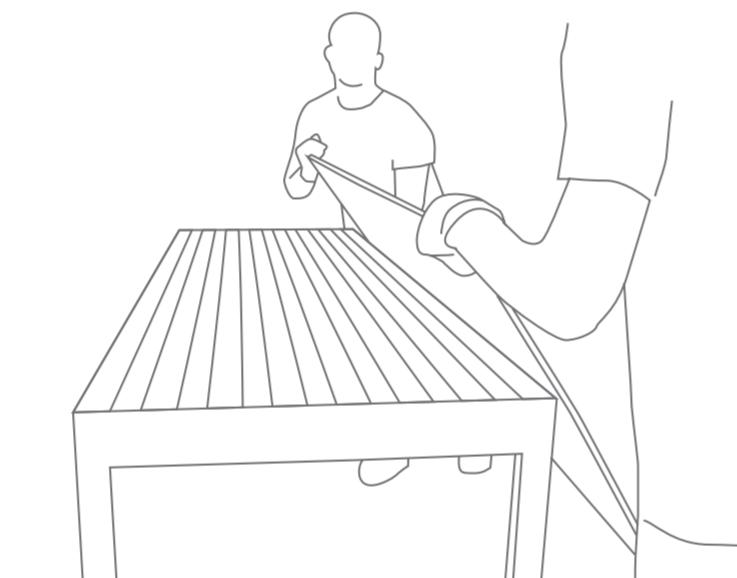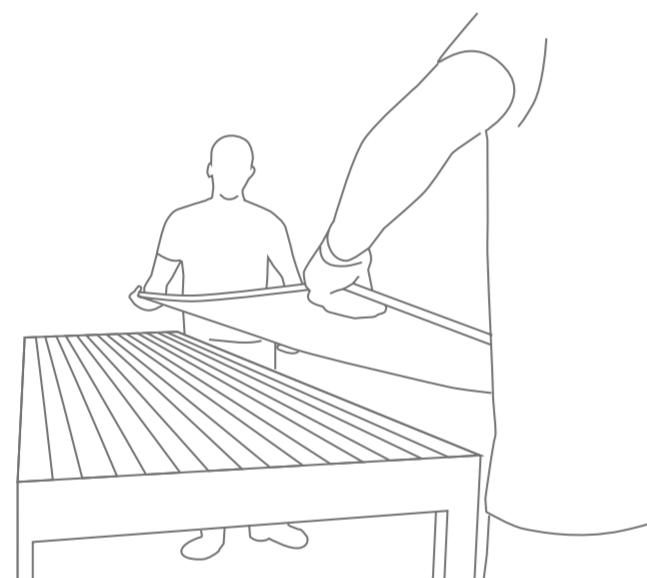

✗ INCORRECT

✓ CORRECT

HANDLING IMMODERATE SLAB FOR WALL

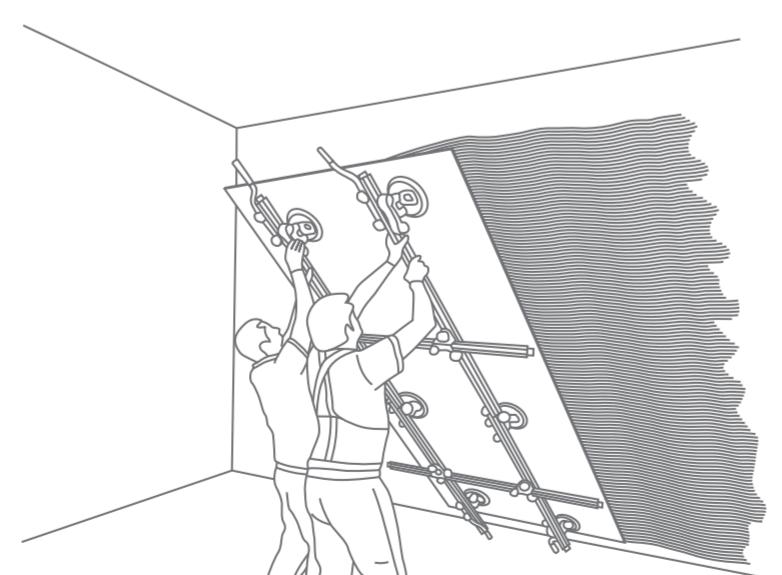
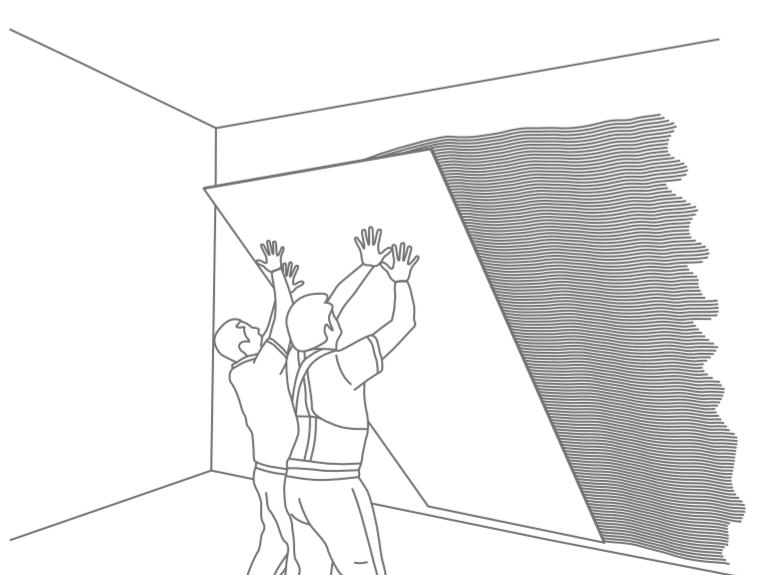


✗ INCORRECT

✓ CORRECT



WORKING WITH THE VARIOUS VERSIONS OF SLAB

CUTTING WITH DIAMOND DISCS

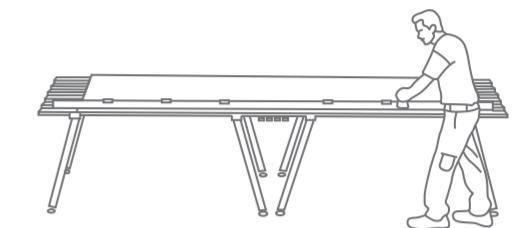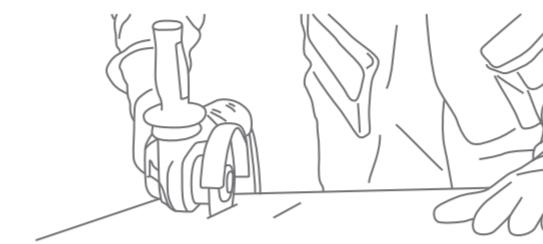


Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of Disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). It may be required to cool the disc with water. Recommended discs are the thin types generally used for cutting porcelain stoneware. The surface should be kept on a FLAT base while cutting without any gap underneath.

DRILLING

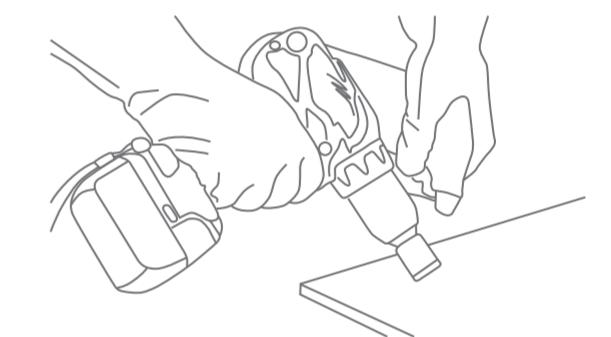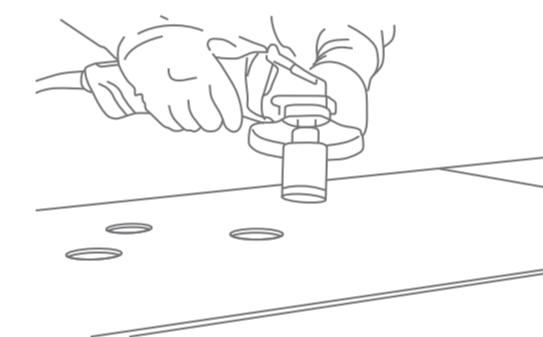

You can use cutting discs fitted to battery-operated screwdrivers or angle grinders, or electrical drills as an alternative.

INTERNAL CUT/L-SHAPED CUT


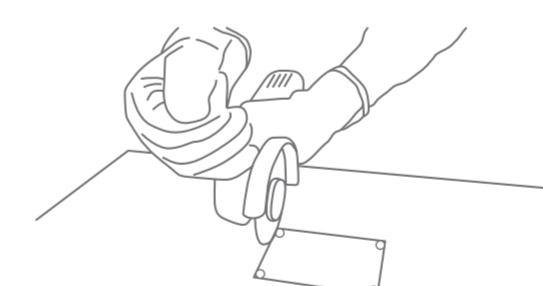


To get internal and L-shaped corners & to reduce the risk of breakage, cut 'o' at the vertex of the internal corners using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs, and more follow the instructions provided below:

When using these tools:

- Cool the point being drilled with water
- Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on
- If you are using tungsten bits, start drilling at a low speed
- If you are using drills or screwdrivers, do not select hammering mode

EDGE-FINISHING

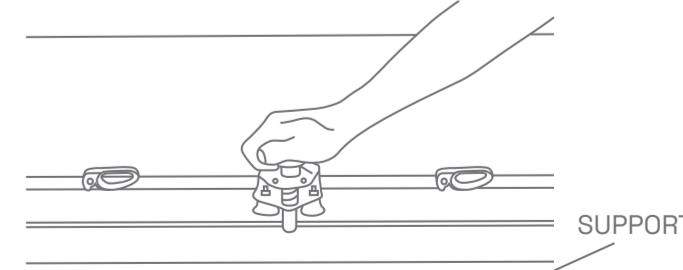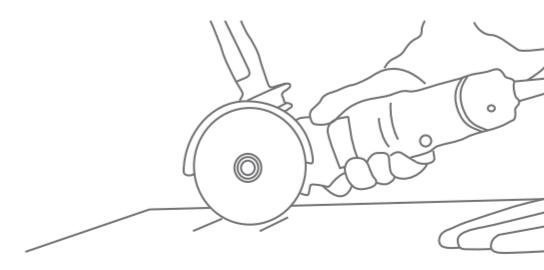


INSTRUCTIONS FOR MANUAL INSTALLATION


SINGLE LAYER METHOD



DOUBLE-LAYER METHOD

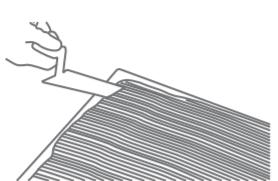

COMPRESSING THE SLAB

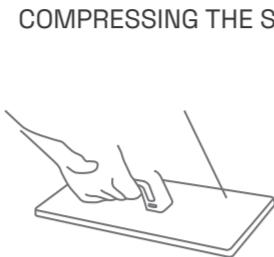

IMPORTANT

All cutout corners must have a minimum diameter of 1/4". Never leave 90° angles. We recommend a radius of more than 1/4" when the kitchen design allows as it makes the countertop firmer.



✓ CORRECT



✗ INCORRECT



✗ INCORRECT



✗ INCORRECT

CLEANING & MAINTENANCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Baking Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Agents, Hydrochloric Acid
Cement	Acid	Hydrochloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydrochloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any kind of stain needs to be cleaned immediately, as soon as possible.


TECHNICAL SPECIFICATIONS

CHARACTERISTICS	STANDARD AS PER ISO-13006/2018 En14411 gr.blb	MOTTO VALUE	TEST METHOD
Regulatory Properties			
Deviation in Length & Width	+0.5%	+0.2%	ISO 10545-2
Deviation in Thickness	+5%	+5%	ISO 10545-2
Straightness of Sides	+0.5%	+0.2%	ISO 10545-2
Rectangularity	+0.5%	+0.2%	ISO 10545-2
Surface Flatness	+0.5%	+0.3%	ISO 10545-2
Colour Difference	ΔE<1.00	ΔE<0.30	ISO 10545-16
Glossiness	As per Mfg.	>90%	Gloss Meter 60°
Structural Properties			
Water Absorption	<0.5 %	<0.3%	ISO 10545-3
Apparent Density	As Per Mfg.	>2.20 g/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of Rupture	Min.35N/mm ²	Min.40N/mm ²	ISO 10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO 10545-4
Surface Mechanical Properties			
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO 10545-7
Mohs Hardness	As per Mfg.	Min. class 4	BS EN 15771
Thermo Hygrometric Properties			
Frost Resistance	As Per Mfg.	Frost Proof	ISO 10545-12
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Moisture Expansion	Max. 0.6mm/m	Max. 0.02mm/m	ISO 10545-10
Thermal Expansion	Max. 9.0 x 10 ⁻⁶	Max. 6.0x10 ⁻⁶	ISO 10545-8
Chemical Properties			
Chemical Resistance	As Per Mfg.	No Damage	ISO 10545-13
Stain Resistance	Resistant	Resistant	ISO 10545-14
Safety Properties			
Slip Resistance	As per Mfg.	N. A.	DIN 51130
Fire Resistance	As per Mfg.	Fire Proof	N. A.

PACKING DETAILS

Dimension (mm)	No. of Pcs/Box	Square Feet	Weight (Approx)
800x1600mm	2 Pcs.	27.5 Sq. ft	53 kg.

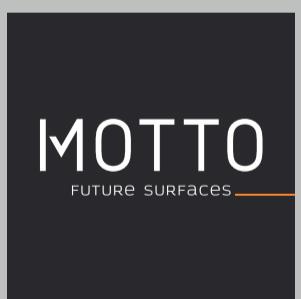

**MOTTO GROUP**

8-A, National Highway, Sartanpar Road, At. Sartanpar,
Ta. Wankaner, Morbi - 363 621, Gujarat, INDIA

Mail. info@mottogroup.in, **Web.** www.mottogroup.in

Toll-free. 1800 123 2124

Call. +91 95123 80072