


MOTTO®

Tiles & Bathware



ENEZZIA
S E R I E S

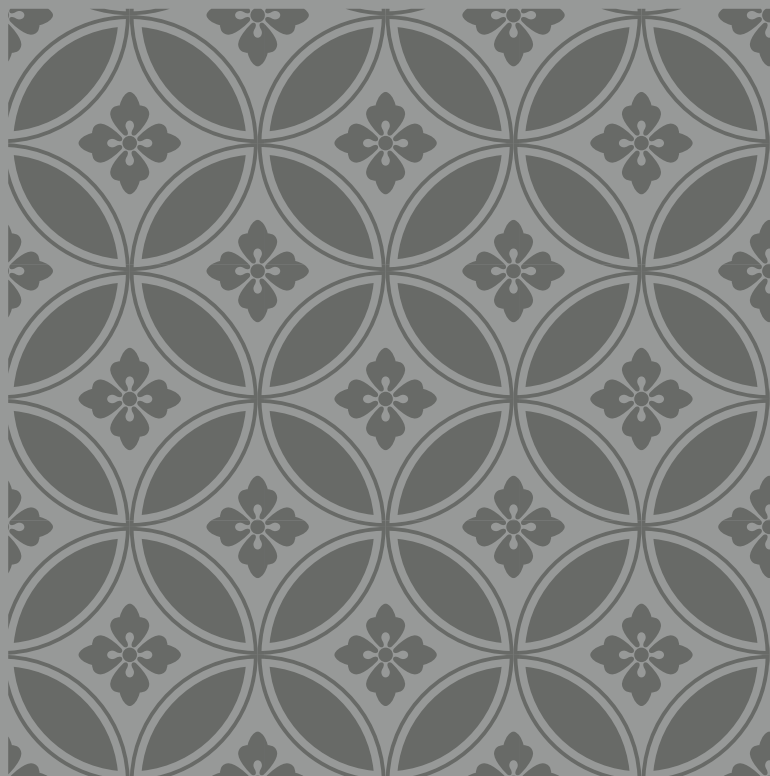

200x200mm

ENEZZIA SERIES

The Venezia Series is where subtle meets stunning. With just two refined colors, it adds a soft glow to your interiors — nothing flashy, just effortlessly elegant.

The floral patterns bring a creative charm, making any wall or floor feel more personal, more alive. It's the kind of design that doesn't try too hard, yet leaves a lasting impression — just like good design should.

Brilliant Shades With Amazing Patterns





Available Size
200x200mm

Finish
Digimatt

Texture
Glossy Granula

Textural Beauty In True Sense


Venezia isn't just about looks — it's about how it feels. With a unique Digi Matt finish and Glossy Granula texture, it blends smoothness with just the right amount of shine.


The floral patterns, paired with this finish, give your space a soft, artistic vibe that's modern yet timeless. Available in two classy shades, it's a perfect mix of subtle charm and smart design.


Incredible Features


Our tiles are crafted for unmatched durability and performance. Boasting high load and frost resistance, they endure harsh conditions without compromising their beauty.


The easy installation process saves time, while the anti-slip finish enhances safety, making them ideal for any space. Experience the perfect blend of elegance and functionality with us.


- 


Frost
Resistance
- 


High Load
Resistance
- 


Thermal
Impact
- 

Anti-slip
Finish
- 

Removable &
Reuse
- 

Easy to
Install
- 


Chemical
Resistance
- 


Ecological
Finish
- 

Fire
Proof

Application Areas

Ideal for both walls and floors, our tiles enhance any space with their stunning designs. Create a seamless blend of beauty and practicality in residential and commercial settings.

- 

Wall
- 

Floor



SMALLTILE




ENEZZIA AZURRO DECOR

Size:
200x200mm

Finish:
Digimatt

Texture:
Glossy Granula

360°

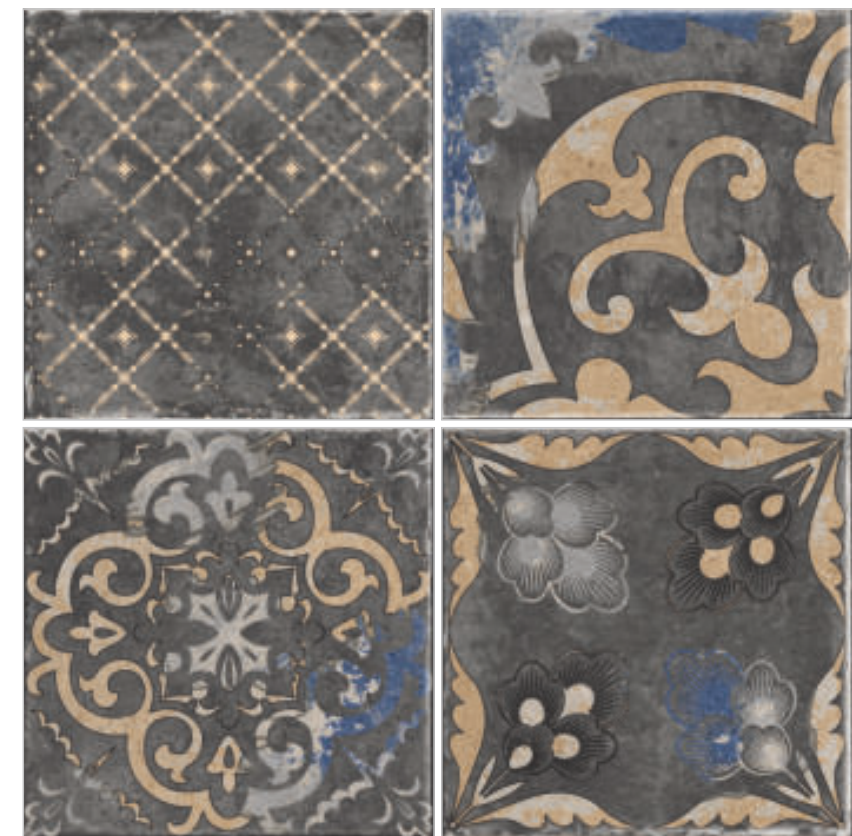

VENEZZIA BIANCO



VENEZZIA AZURRO



Italian Technology

MINIMUM 3MM
SPACER MANDATORY





VENEZIA AZURRO DECOR



SMALLTILE




ENEZZIA BIANCO DECOR

Size:
200x200mm

Finish:
Digimatt

Texture:
Glossy Granula

360°

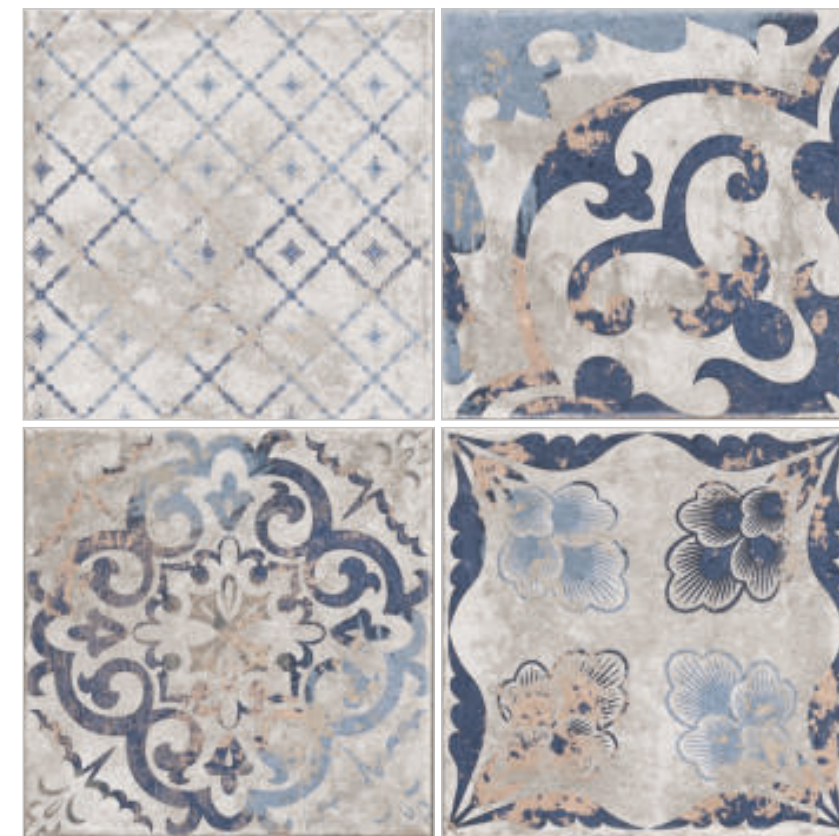

ENEZZIA BIANCO



ENEZZIA AZURRO



Italian Technology

MINIMUM 3MM
SPACER MANDATORY





VENEZIA BIANCO DECOR

CLEANING & MAINTENCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Backing Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Reagent, Hydro Chloric Acid
Cement	Acid	Hydro Chloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydro Chloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

TECHNICAL SPECIFICATIONS

CHARACTERISTIC	STANDARD AS PER ISO 13006:2018 En14411 Gr.Bla	STANDARD AS PER IS 15622:2017 Gr.Bla	METHOD OF TESTING	MAIN VALUE OF MOTTO
*Un-Rectified (Which is Lower)				
Regulatory Properties				
Deviation in Length and Width	±0.60% (±2.0%)	±0.40%	ISO 10545-2/IS 13630-1	±0.40%
Deviation in Thickness	±5.0% (±0.50%)	±5.0%	ISO 10545-2/IS 13630-1	±5.0%
Straightness in Side	±0.50% (±1.5%)	±0.30%	ISO 10545-2/IS 13630-1	±0.30%
Rectangularity	±0.50% (±2.0%)	±0.30%	ISO 10545-2/IS 13630-1	±0.30%
Surface Flatness Central Curvature	±0.50% (±2.0%)	±0.50%	ISO 10545-2/IS 13630-1	±0.40%
Surface Flatness Edge Curvature	±0.50% (±2.0%)	±0.50%	ISO 10545-2/IS 13630-1	±0.40%
Surface Flatness Warpage	±0.50% (±2.0%)	±0.50%	ISO 10545-2/IS 13630-1	±0.40%
Surface Quality	>95% defect free	>95% defect free	ISO 10545-2/IS 13630-1	>95% defect free
Samll Colour Difference (for Plain Colour)	ΔE<1.0	N.A.	ISO 10545-16	ΔE<0.30
Structural Properties				
Water Absorption	Ev≤0.50% Individual Max:0.6%	Ev≤0.08% Individual Max:0.1%	ISO 10545-3/IS 13630-2	Ev≤0.08% Individual Max:0.1%
Bulk Density	As per Manufacturer	Min. 2.20 gm/cc	ISO 10545-3/IS 13630-2	>2.28 gm/cc
Massive Mechanical Properties				
Modulus of Rupture	Min 35.0N/mm2, Invidual 32n/mm2 Min	Average 35.0 N/mm2, Invidual 32 N/mm2 Min	ISO 10545-4/IS 13630-6	Min. 40.0 N/mrn2
Breaking Strength Thickness ≥7.5mm	Min. 1300.00N	Min. 1300.0N	ISO 10545-4/IS 13630-6	Min. 1500.0N
Surface Mechanical Properties				
MOH'S Hardness #	As per Manufacturer	Min. 5	BS EN 1577/IS 13630-13	Min. 5
Surface Abrasion Resistance #	As per Manufacturer	Min. Class II	ISO 10545-7/IS 13630-11	Min. Class II
Thermal Hygrometric Properties				
Moisture Expansion	Max 0.06% (0.6 mm/m)	Max 0.02mm/m	ISO 10545-10/IS 13630-3	Nil
Thermal Expansion (COE) at 100 °C	As per Manufacturer	Max. 6x10-6 k	ISO 10545-8/IS 13630-4	Max. 6.0x10-6
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9/IS 13630-5	Min. 10 Cycle
Impact Resistance (COR) #	As per Manufacturer	Min. 055	ISO 10545-5/IS 13630-14	Min. 055
Frost Resistance	As per Manufacturer	As per Manufacturer	ISO 10545-12/IS 13630-10	Frost Proof
Crazing Resistance at 7.5 bar	As per Manufacturer	4 Cycle	ISO 10545-11/IS 13630-9	6 Cycle
Chemical Properties				
Resistance to Staining Glazed	Min. Class 3	Min. Class 1	ISO 10545-14/IS 13630-7	Min. Class 4/Min. Class 1
Resistance to Household Chemicals & Swimming Pool Salts Glazed	Min. Class GB	Min. Class AA	ISO 10545-13/IS 13630-8	Min. Class GB/Min Class AA
Resistance to Low Concentrate Acid and Alkalis Glazed	As per Manufacturer	As per Manufacturer	ISO 10545-13/IS 13630-8	Min. Class GLB***/ Min. Class A***
Resistance to High Concentrate Acid and Alkalis Glazed	As per Manufacturer	As per Manufacturer	ISO 10545-13/IS 13630-8	Min. Class GHB***/ Min. Class B***
Safety Properties				
Skid Resistance (DCOF-WET PENDULUM) ##	As per Manufacturer	As per Manufacturer	BS 7976-2	Stain /Mat ≥P1
Lead and Cadmium Release	As per Manufacturer	NA	ISO-10545-15	Dose not yield Pb & Cd

**Whichever is lower
***Except Hydrofluoric Acid and its compound
#Tiles intended for use on floor
##For Floor Tiles, as per customer requirement

PACKING DETAILS

SIZE	ACTUAL SIZE	TILES/BOX	COVERAGE AREA/BOX	
20x20cm	200x200mm	24 pcs.	0.96 m²	10.33 ft²



MOTTO GROUP

8-A N. H., Sartanpar Road, At. Sartanpar, Ta. Wankaner, Morbi - 363 621, Gujarat, India.
Email: info@mottogroup.in | www.mottogroup.in
Toll Free Number: 1800 123 2124 / +91 95123 80072